


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.21V I:0.0511A P:6.0414W PF:0.5139 Freq:50.00Hz Lamp Flux:748.8x1 lm		
NAME: NEBULA MINI - BRACKET	TYPE:LANDSCAPE LUMINAIRES	WEIGHT:
SPEC.:WW, LUMILED, BA-15°	DIM.: 101 x 64 x 93	SERIAL No.:4784
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-4266	I _{max} (cd)	3876	S/MH (C0/180)	0.24
NOMINAL POWER (W)	6	LOR (%)	60.8	S/MH (C90/270)	0.27
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	454.96	η UP, DN (C0-180)	0.0, 30.0
NOMINAL FLUX (lm)	748.8	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 30.8
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE (V)	230	η down (%)	60.8	CIBSE SHR MAX	1.00

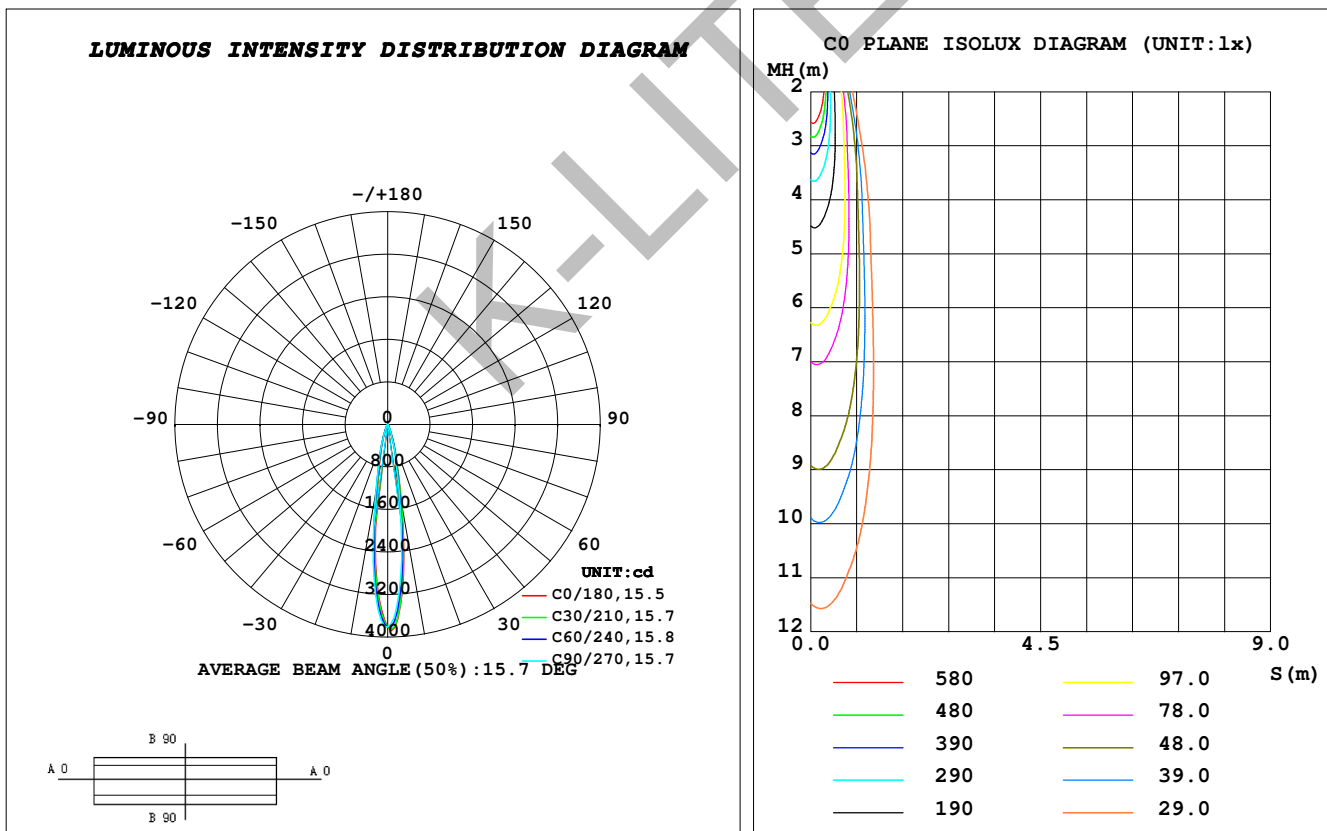

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: K-LITE
Test Date: 14 August 2022

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
Humidity: 65.0%
Test Distance: 1.852m [K=1.0000]
Remarks: