


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.37V I:0.2018A P:21.042W PF:0.4525 Freq:49.98Hz Lamp Flux:3151.8x1 lm		
NAME: WALL WASHER	TYPE:LINEAR IN-GROUND	WEIGHT:
SPEC.:WW, NICHIA	DIM.: 550 x 68 x 83	SERIAL No.:2129
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-3270	Imax (cd)	6336	S/MH (C0/180)	0.46
NOMINAL POWER (W)	24	LOR (%)	56.8	S/MH (C90/270)	0.47
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	1790.1	η UP, DN (C0-180)	0.0, 27.3
NOMINAL FLUX (lm)	3151.8	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.1, 29.4
LAMPS INSIDE	1	η up (%)	0.1	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	230	η down (%)	56.7	CIBSE SHR MAX	0.50

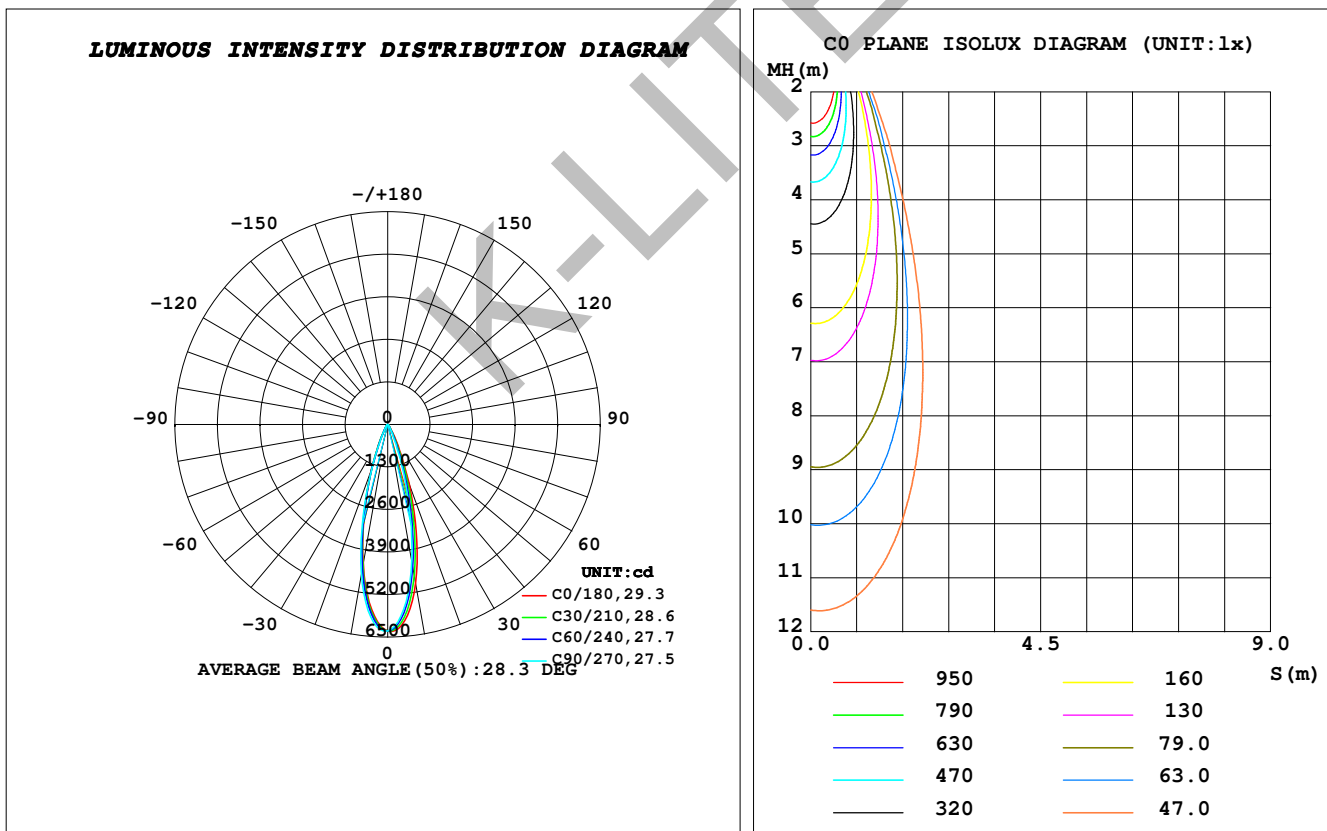

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: K-LITE
Test Date: 16 October 2020

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
Humidity: 65.0%
Test Distance: 1.825m [K=1.0000]
Remarks: