


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:229.86V I:0.8045A P:179.82W PF:0.9724 Freq:50.19Hz Lamp Flux:25281.4x1 lm		
NAME: POLAR HIGH BAY 3	TYPE:INDUSTRIAL LUMINAIRES	WEIGHT:
SPEC.:WW, LUMILED	DIM.: 342 x 235 x 245	SERIAL No.:3728
MFR.: K-LITE	SUR.:	Shielding Angle:60°

DATA OF LAMP		PHOTOMETRIC DATA Eff: 130.71 lm/W			
MODEL	KL-3100	I _{max} (cd)	22236	S/MH (C0/180)	0.90
NOMINAL POWER (W)	3 x 60	LOR (%)	93.0	S/MH (C90/270)	0.90
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	23504	η UP, DN (C0-180)	0.0, 45.9
NOMINAL FLUX (lm)	25281.4	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 47.1
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.75
TEST VOLTAGE (V)	230	η down (%)	93.0	CIBSE SHR MAX	0.95

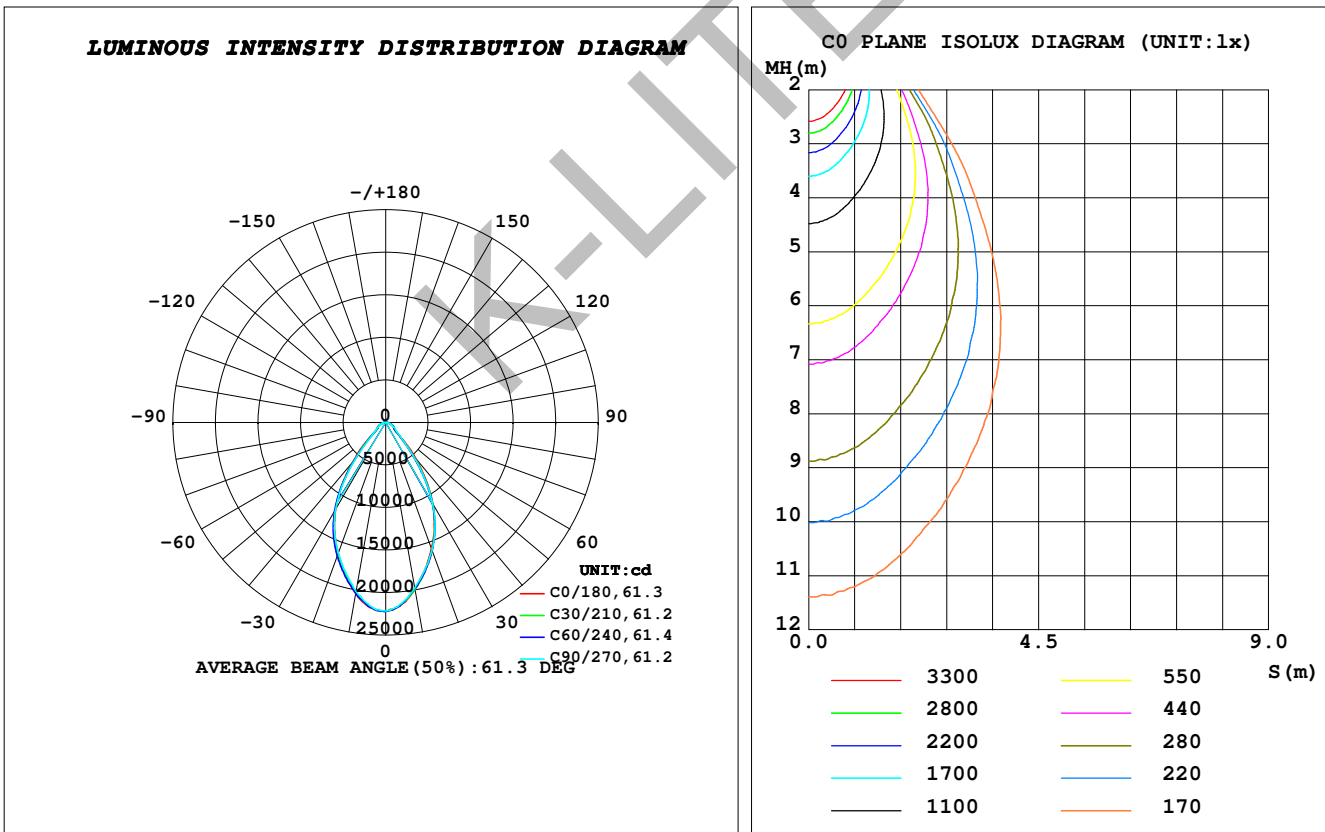

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: K-LITE
 Test Date: 03 November 2021

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
 Humidity: 65.0%
 Test Distance: 1.825m [K=1.0000]
 Remarks: