


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.44V I:0.1297A P:29.386W PF:0.9830 Freq:49.98Hz Lamp Flux:4490x1 lm		
NAME: NAVI	TYPE:FLOOD LIGHTS	WEIGHT:
SPEC.:NW, NICHIA	DIM.: 200 x 150 x 331	SERIAL No.:3810
MFR.: K-LITE	SUR.:	Shielding Angle:10°

DATA OF LAMP		PHOTOMETRIC DATA Eff: 112.93 lm/W			
MODEL	KL-4287	I _{max} (cd)	47563	S/MH (C0/180)	0.20
NOMINAL POWER (W)	30	LOR (%)	73.9	S/MH (C90/270)	0.21
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	3318.6	η UP, DN (C0-180)	0.0, 36.3
NOMINAL FLUX (lm)	4490	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 37.6
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE (V)	230	η down (%)	73.9	CIBSE SHR MAX	1.00

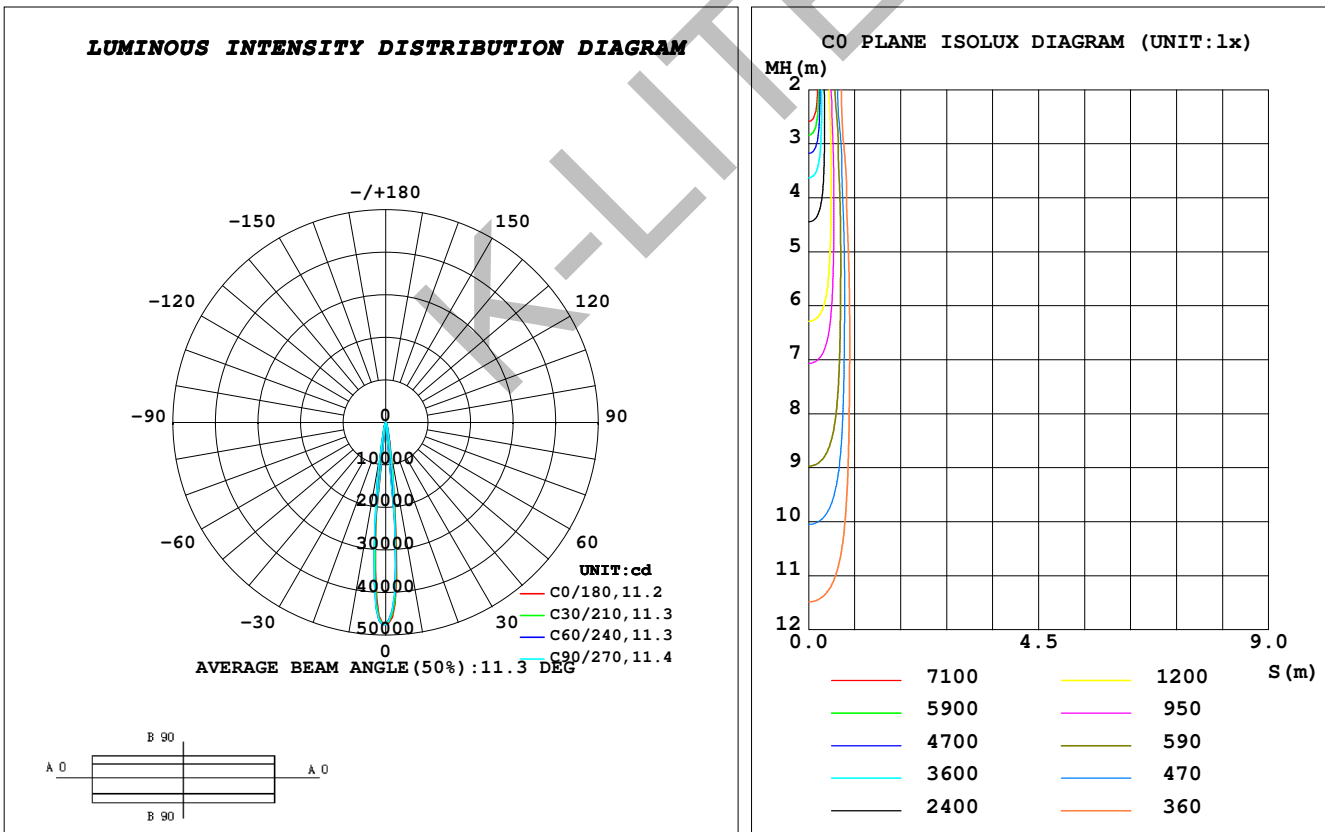

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: K-LITE
Test Date: 22 November 2021

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
Humidity: 65.0%
Test Distance: 1.825m [K=1.0000]
Remarks: