


**LUMINAIRE PHOTOMETRIC TEST REPORT**

Test:U:230.64V I:0.0530A P:11.947W PF:0.9782 Freq:49.99Hz Lamp Flux:2073.6x1 lm		
NAME: JADO BOLLARD	TYPE:BOLLARDS	WEIGHT:
SPEC.:CW, NICHIA	DIM.: 200 x 110 x 600	SERIAL No.:5098
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-7100	Imax (cd)	629.1	S/MH (C0/180)	1.30
NOMINAL POWER (W)	12	LOR (%)	62.1	S/MH (C90/270)	0.18
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	1287.4	η UP, DN (C0-180)	1.5, 52.8
NOMINAL FLUX (lm)	2073.6	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 7.7
LAMPS INSIDE	1	η up (%)	1.5	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	230	η down (%)	60.6	CIBSE SHR MAX	0.70

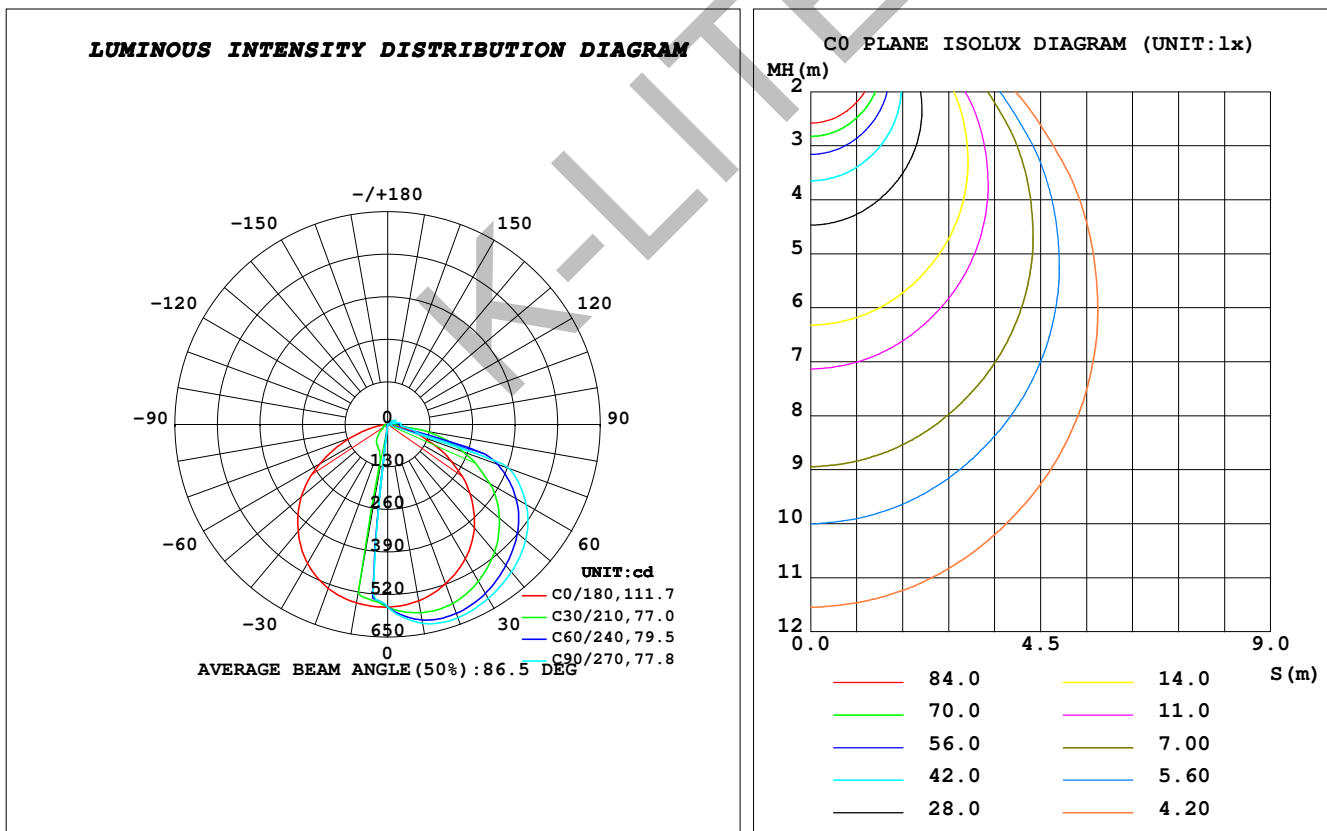

C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: K-LITE  
 Test Date: 17 November 2022

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.00.417  
 Humidity: 65.0%  
 Test Distance: 1.852m [K=1.0000]  
 Remarks: