


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.58V I:0.1544A P:14.992W PF:0.4212 Freq:50.00Hz Lamp Flux:1885.5x1 lm		
NAME: WALL WASHER	TYPE:LINEAR IN-GROUND	WEIGHT:
SPEC.:WW, NICHIA	DIM.: 550 x 68 x 83	SERIAL No.:3889
MFR.: K-LITE	SUR.:	Shielding Angle:12°

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-3278	Imax (cd)	6978	S/MH (C0/180)	0.37
NOMINAL POWER (W)	12	LOR (%)	53.7	S/MH (C90/270)	0.28
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	1012.0	η UP, DN (C0-180)	0.0, 27.2
NOMINAL FLUX (lm)	1885.5	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 26.4
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE (V)	230	η down (%)	53.7	CIBSE SHR MAX	1.00

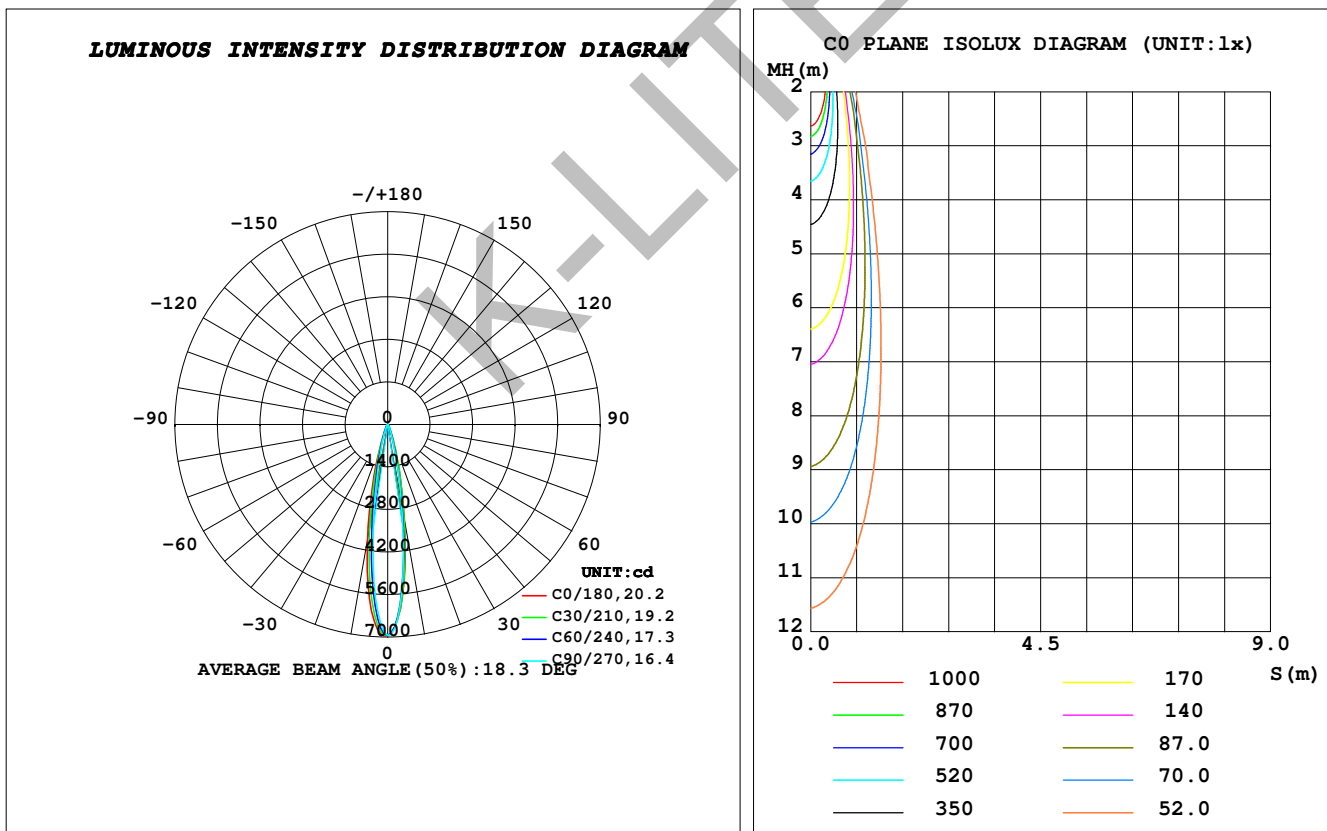

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: K-LITE
Test Date: 18 December 2021

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
Humidity: 65.0%
Test Distance: 1.825m [K=1.0000]
Remarks: