


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.48V I:0.2668A P:29.265W PF:0.4759 Freq:49.99Hz Lamp Flux:3750x1 lm		
NAME: WALL WASHER	TYPE:LINEAR IN-GROUND	WEIGHT:
SPEC.:WW, NICHIA	DIM.: 1025 x 68 x 83	SERIAL No.:3886
MFR.: K-LITE	SUR.:	Shielding Angle:12°

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-3280	Imax (cd)	11038	S/MH (C0/180)	0.50
NOMINAL POWER (W)	24	LOR (%)	62.8	S/MH (C90/270)	0.25
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	2356.6	η UP, DN (C0-180)	0.0, 35.4
NOMINAL FLUX (lm)	3750	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 27.5
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE (V)	230	η down (%)	62.8	CIBSE SHR MAX	1.00

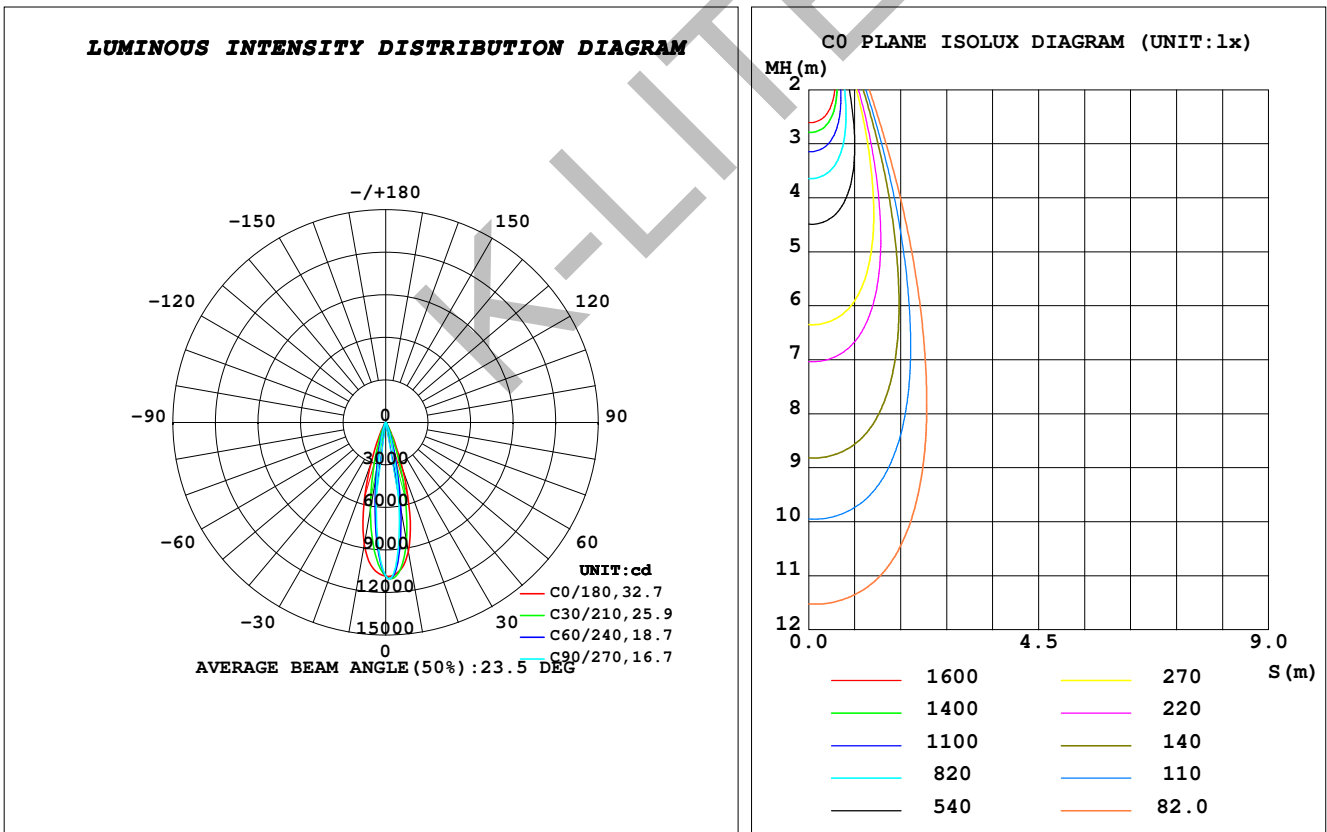

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: K-LITE
 Test Date: 17 December 2021

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
 Humidity: 65.0%
 Test Distance: 1.825m [K=1.0000]
 Remarks: