


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.40V I:0.1460A P:29.270W PF:0.8704 Freq:50.00Hz Lamp Flux:3750.6x1 lm		
NAME: ASTRA ROUND	TYPE:CEILING LUMINAIRES	WEIGHT:
SPEC.:NW, BRIDGELUX	DIM.: Ø115 x 125	SERIAL No.:1737
MFR.: K-LITE	SUR.:	Shielding Angle:30°

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-3685	Imax (cd)	9528	S/MH (C0/180)	0.43
NOMINAL POWER (W)	30	LOR (%)	64.6	S/MH (C90/270)	0.39
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	2424.2	η UP, DN (C0-180)	0.0, 34.6
NOMINAL FLUX (lm)	3750.6	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 30.1
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE (V)	230	η down (%)	64.6	CIBSE SHR MAX	1.00

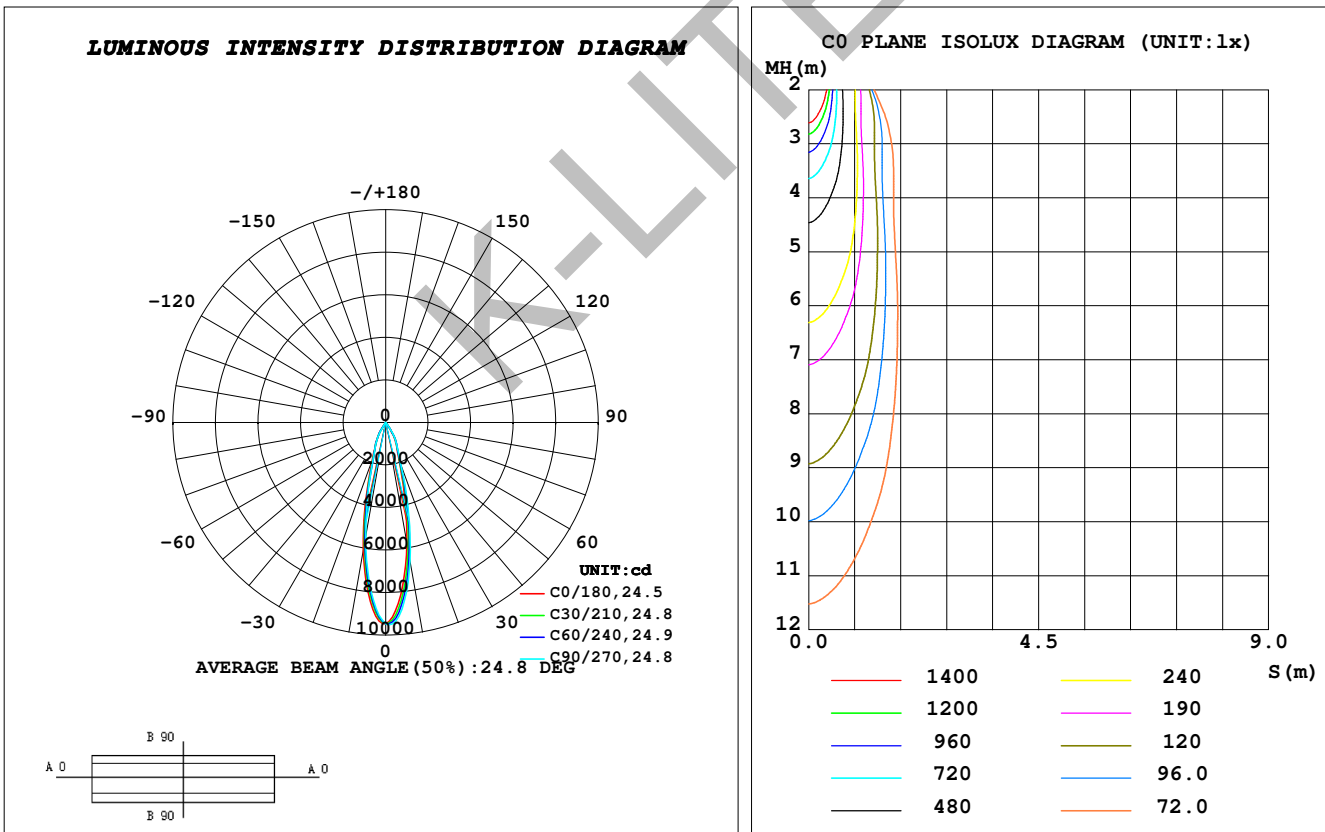

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: K-LITE
Test Date: 28 August 2020

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
Humidity: 65.0%
Test Distance: 1.852m [K=1.0000]
Remarks: