


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.46V I:0.0558A P:12.554W PF:0.9758 Freq:49.99Hz Lamp Flux:1146.6x1 lm		
NAME: PROXIMA	TYPE:CEILING LUMINAIRES	WEIGHT:
SPEC.:CW, CITIZEN	DIM.: Ø50 x 135 x 177	SERIAL No.:2440
MFR.: K-LITE	SUR.:	Shielding Angle:24°

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-3677	Imax (cd)	2932	S/MH (C0/180)	0.42
NOMINAL POWER (W)	12	LOR (%)	60.1	S/MH (C90/270)	0.44
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	688.56	η UP, DN (C0-180)	0.0, 28.3
NOMINAL FLUX (lm)	1146.6	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 31.8
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE (V)	230	η down (%)	60.1	CIBSE SHR MAX	1.00

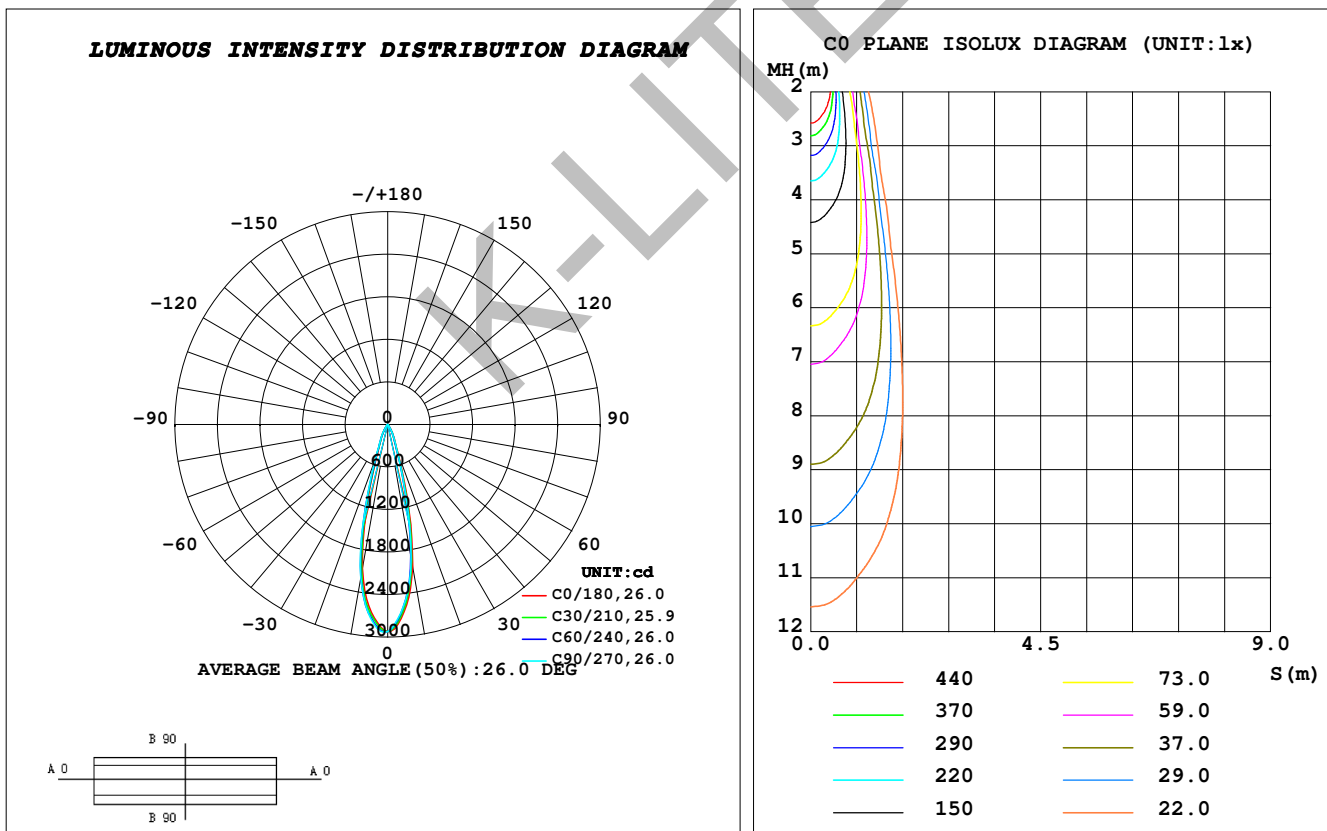

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: K-LITE
Test Date: 17 December 2020

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
Humidity: 65.0%
Test Distance: 1.825m [K=1.0000]
Remarks: