


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.47V I:0.1507A P:33.541W PF:0.9659 Freq:50.00Hz Lamp Flux:3750.6x1 lm		
NAME: PROXIMA	TYPE:CEILING LUMINAIRES	WEIGHT:
SPEC.:NW, CITIZEN	DIM.: Ø78 x 143 x 236	SERIAL No.:2079
MFR.: K-LITE	SUR.:	Shielding Angle:12°

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-3679	Imax (cd)	16190	S/MH (C0/180)	0.35
NOMINAL POWER (W)	30	LOR (%)	66.4	S/MH (C90/270)	0.33
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	2489.7	η UP, DN (C0-180)	0.0, 33.4
NOMINAL FLUX (lm)	3750.6	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 33.0
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE (V)	230	η down (%)	66.4	CIBSE SHR MAX	1.00

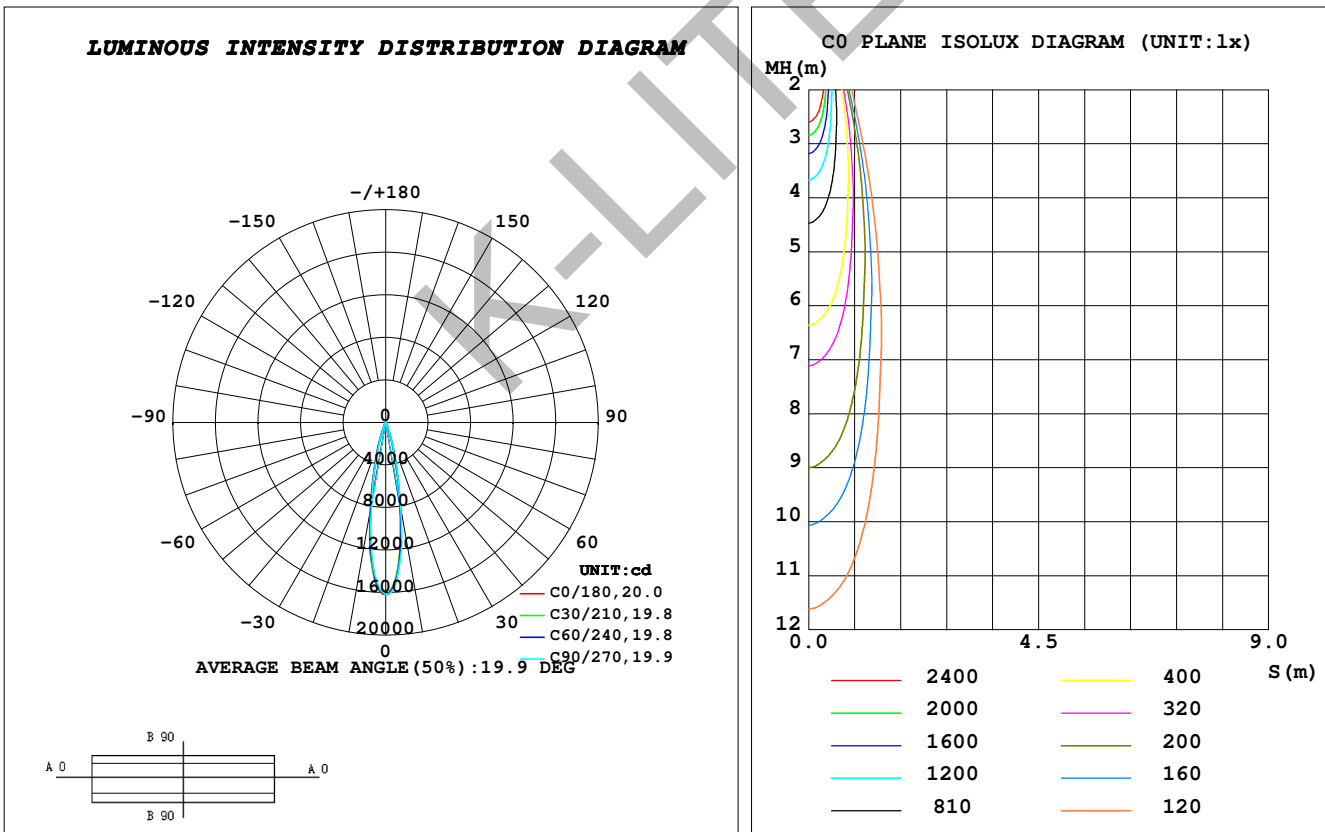

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: K-LITE
Test Date: 29 September 2020

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
Humidity: 65.0%
Test Distance: 1.825m [K=1.0000]
Remarks: