


**LUMINAIRE PHOTOMETRIC TEST REPORT**

Test:U:230.48V I:0.0923A P:20.287W PF:0.9535 Freq:49.99Hz Lamp Flux:2408x1 lm		
NAME: MILA	TYPE: RECESSED CEILING	WEIGHT:
SPEC.: CW, CITIZEN	DIM.: Ø108 x 85	SERIAL No.: 1744
MFR.: K-LITE	SUR.:	Shielding Angle: 75°

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-3320	Imax (cd)	794.3	S/MH (C0/180)	0.96
NOMINAL POWER (W)	20	LOR (%)	54.8	S/MH (C90/270)	0.74
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	1320.5	η UP, DN (C0-180)	0.0, 38.9
NOMINAL FLUX (lm)	2408	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 16.0
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.00
TEST VOLTAGE (V)	230	η down (%)	54.8	CIBSE SHR MAX	1.15

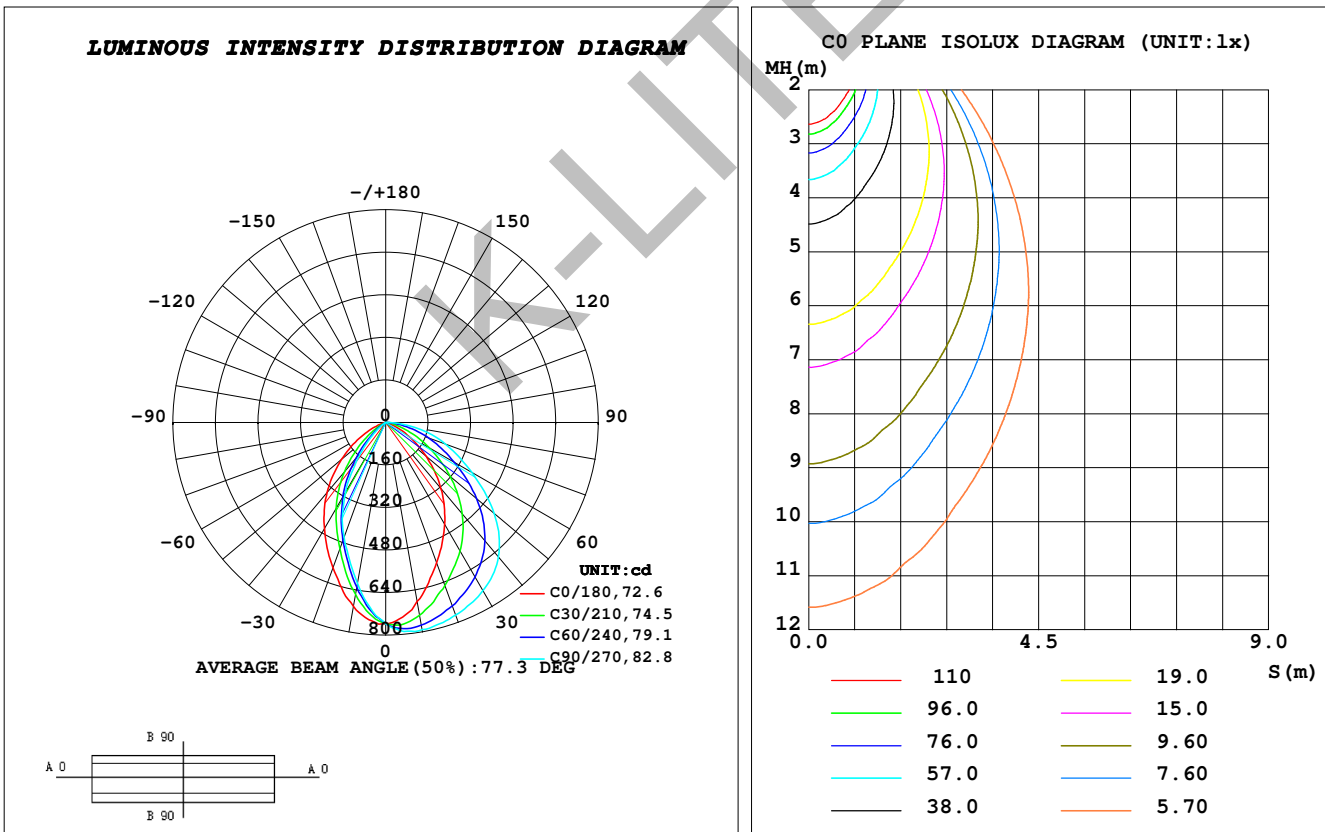

**C Range: 0 - 360DEG**  
**C Interval: 10.0DEG**  
**Test Speed: HIGH**  
**Temperature: 25.3DEG**  
**Operators: K-LITE**  
**Test Date: 31 August 2020**

**γ Range: 0 - 90DEG**  
**γ Interval: 1.0DEG**  
**Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.00.417**  
**Humidity: 65.0%**  
**Test Distance: 1.852m [K=1.0000]**  
**Remarks:**