


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.51V I:0.0941A P:20.753W PF:0.9571 Freq:50.00Hz Lamp Flux:2408x1 lm		
NAME: MILA	TYPE: RECESSED CEILING	WEIGHT:
SPEC.: NW, CITIZEN	DIM.: Ø108 x 85	SERIAL No.: 1745
MFR.: K-LITE	SUR.:	Shielding Angle: 75°

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-3320	Imax (cd)	756.6	S/MH (C0/180)	0.99
NOMINAL POWER (W)	20	LOR (%)	54.9	S/MH (C90/270)	0.79
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	1322.7	η UP, DN (C0-180)	0.0, 38.6
NOMINAL FLUX (lm)	2408	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 16.3
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.00
TEST VOLTAGE (V)	230	η down (%)	54.9	CIBSE SHR MAX	1.15

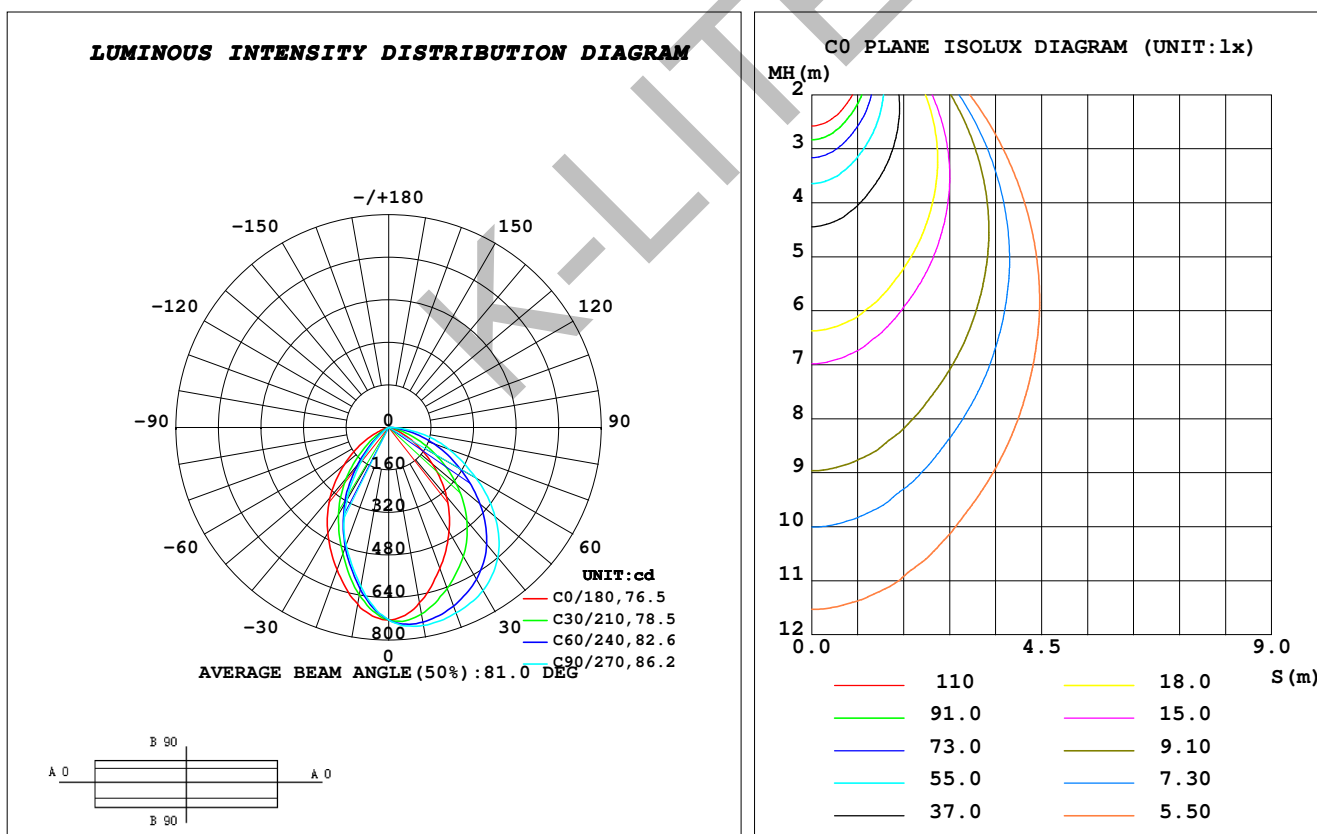

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: K-LITE
Test Date: 31 August 2020

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
Humidity: 65.0%
Test Distance: 1.852m [K=1.0000]
Remarks: