


### LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.38V I:0.0544A P:12.229W PF:0.9754 Freq:49.99Hz Lamp Flux:1410x1 lm		
NAME: MILA	TYPE: RECESSED CEILING	WEIGHT:
SPEC.: CW, CITIZEN	DIM.: Ø85 x 72	SERIAL No.: 1742
MFR.: K-LITE	SUR.:	Shielding Angle: 75°

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-3332	Imax (cd)	508.0	S/MH (C0/180)	0.93
NOMINAL POWER (W)	12	LOR (%)	58.1	S/MH (C90/270)	0.72
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	818.54	η UP, DN (C0-180)	0.0, 41.5
NOMINAL FLUX (lm)	1410	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 16.6
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.00
TEST VOLTAGE (V)	230	η down (%)	58.1	CIBSE SHR MAX	1.15

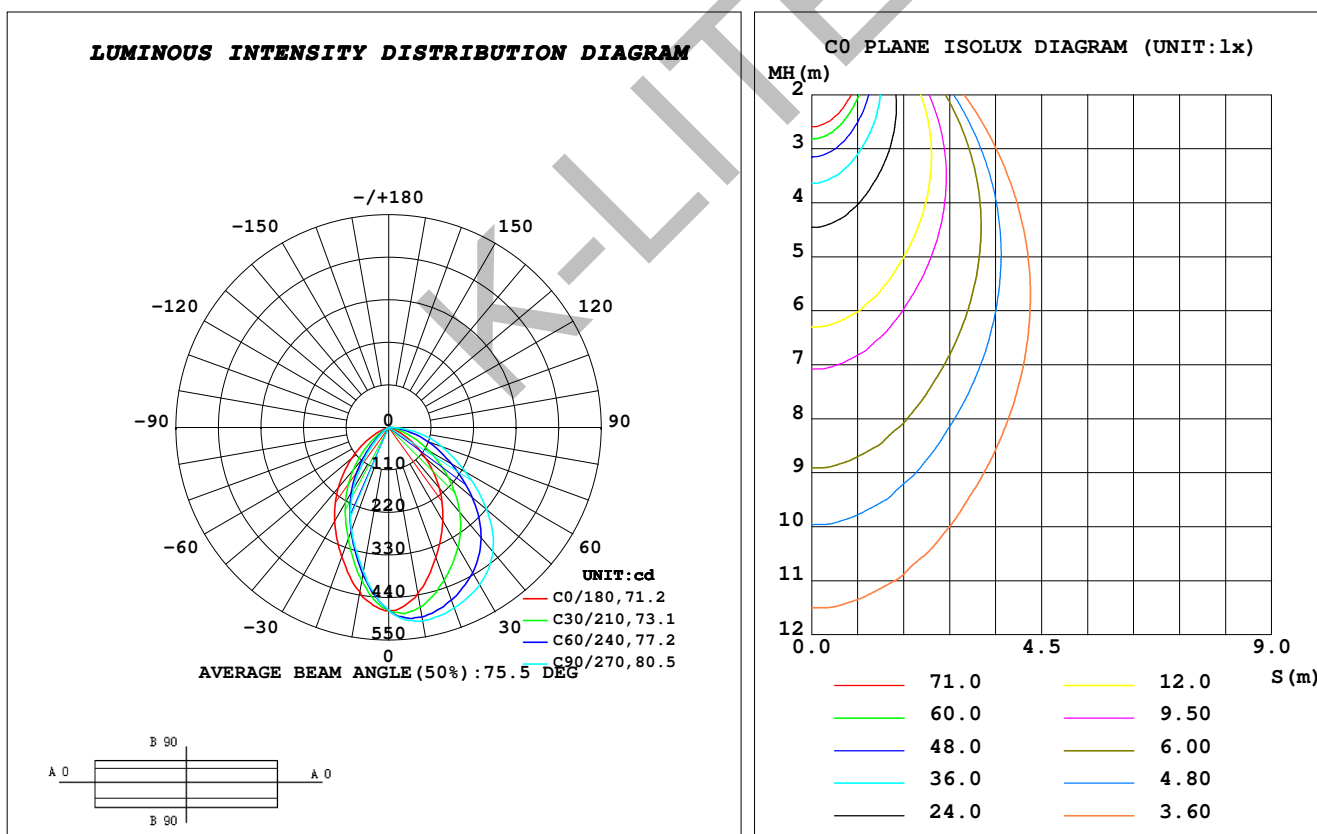

**C Range: 0 - 360DEG**  
**C Interval: 10.0DEG**  
**Test Speed: HIGH**  
**Temperature: 25.3DEG**  
**Operators: K-LITE**  
**Test Date: 29 August 2020**

**γ Range: 0 - 90DEG**  
**γ Interval: 1.0DEG**  
**Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.00.417**  
**Humidity: 65.0%**  
**Test Distance: 1.852m [K=1.0000]**  
**Remarks:**