


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.37V I:0.0521A P:11.665W PF:0.9712 Freq:49.99Hz Lamp Flux:1410x1 lm		
NAME: MILA	TYPE: RECESSED CEILING	WEIGHT:
SPEC.: NW, CITIZEN	DIM.: Ø85 x 72	SERIAL No.: 1743
MFR.: K-LITE	SUR.:	Shielding Angle: 75°

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-3332	Imax (cd)	574.5	S/MH (C0/180)	0.89
NOMINAL POWER (W)	12	LOR (%)	58.7	S/MH (C90/270)	0.61
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	827.82	η UP, DN (C0-180)	0.0, 43.2
NOMINAL FLUX (lm)	1410	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 15.5
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.00
TEST VOLTAGE (V)	230	η down (%)	58.7	CIBSE SHR MAX	1.10

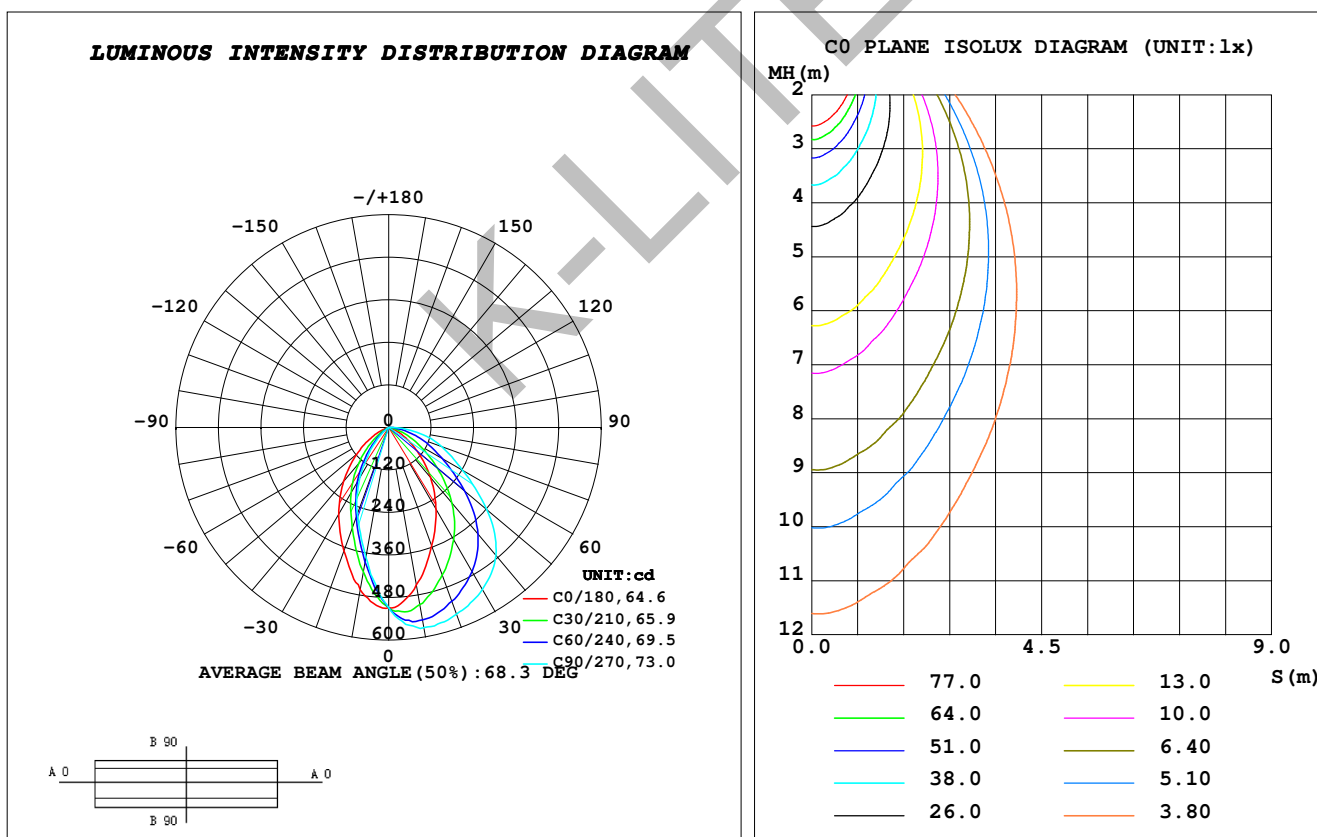

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: K-LITE
Test Date: 29 August 2020

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
Humidity: 65.0%
Test Distance: 1.852m [K=1.0000]
Remarks: