
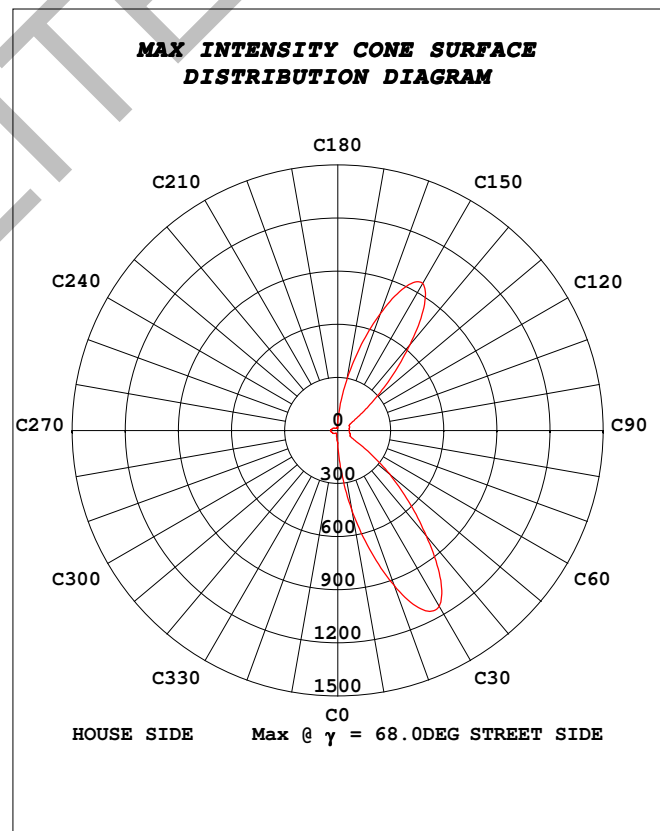


STREETLIGHT PHOTOMETRIC TEST REPORT

Test:U:230.09V I:0.0891A P:19.989W PF:0.9755 Freq:50.00Hz Lamp Flux:6109x1 lm		
NAME: NAVYA MINI	TYPE:POLE MOUNTED SYSTEMS	WEIGHT:1.285Kg
SPEC.:5700K, NICHIA	DIM.: 250 x 50 x 153	SERIAL No.:INT/2023/02/21
MFR.: K-Lite	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 92.41 lm/W
MODEL	KL-4367	I _{max} (cd)	1146	η street_up (%)	0.0	
NOMINAL POWER (W)	24	LOR (%)	30.2	η street_down (%)	21.7	
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	1847	η house_up (%)	0.0	
NOMINAL FLUX (lm)	6109	MAXIMUM @ (C, γ)	30,68.0	η house_down (%)	8.6	
LAMPS INSIDE	1	η up (%)	0.0	76 FLASHAREA (m2)	0.00100	
TEST VOLTAGE (V)	230	η down (%)	30.2	SLI	12.998	

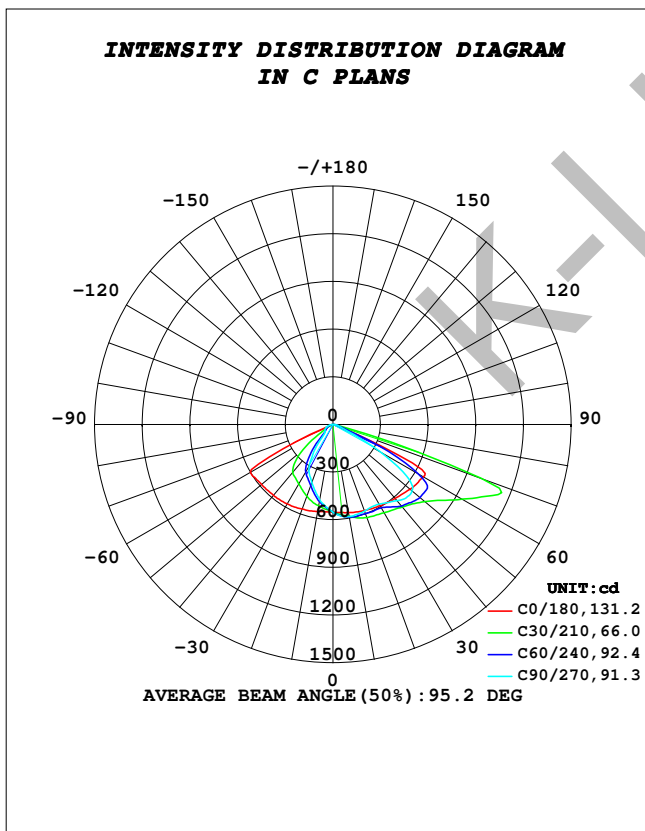

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.6DEG
Operators: K-LITE
Test Date: 27 February 2023

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
Humidity: 52.7%
Test Distance: 1.943m [K=1.0000]
Remarks: