


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.35V I:0.0605A P:12.513W PF:0.8979 Freq:49.99Hz Lamp Flux:1551x1 lm		
NAME: TRISHA - LED MODULE	TYPE:RECESSED CEILING	WEIGHT:
SPEC.:NW, BRIDGELUX	DIM.: Ø50 x 77	SERIAL No.:2065
MFR.: K-LITE	SUR.:	Shielding Angle:15°

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-8178	Imax (cd)	5016	S/MH (C0/180)	0.33
NOMINAL POWER (W)	12	LOR (%)	61.1	S/MH (C90/270)	0.33
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	947.63	η UP, DN (C0-180)	0.0, 31.5
NOMINAL FLUX (lm)	1551	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 29.6
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE (V)	230	η down (%)	61.1	CIBSE SHR MAX	1.00

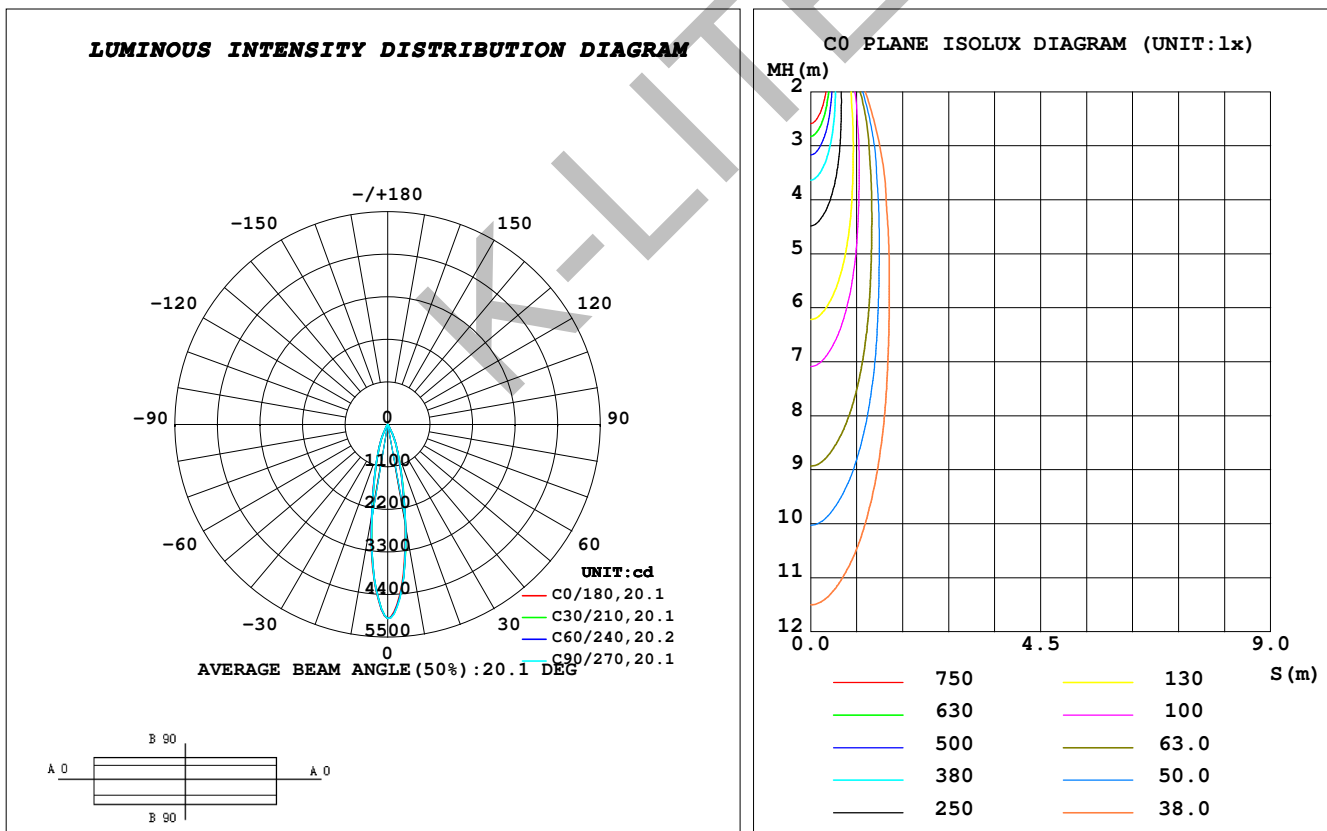

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: K-LITE
Test Date: 25 September 2020

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
Humidity: 65.0%
Test Distance: 1.852m [K=1.0000]
Remarks: