


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.48V I:0.0302A P:6.8401W PF:0.9824 Freq:50.00Hz Lamp Flux:725.76x1 lm		
NAME: RADO MINI - SURFACE MOUNTING	TYPE:PATH FINDERS	WEIGHT:
SPEC.:WW, NICHIA	DIM.: Sq.105 x 38	SERIAL No.:4870
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-2776	Imax (cd)	263.3	S/MH (C0/180)	1.33
NOMINAL POWER (W)	6	LOR (%)	64.2	S/MH (C90/270)	0.77
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	465.72	η UP, DN (C0-180)	0.0, 52.1
NOMINAL FLUX (lm)	725.76	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 12.1
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	230	η down (%)	64.2	CIBSE SHR MAX	1.35

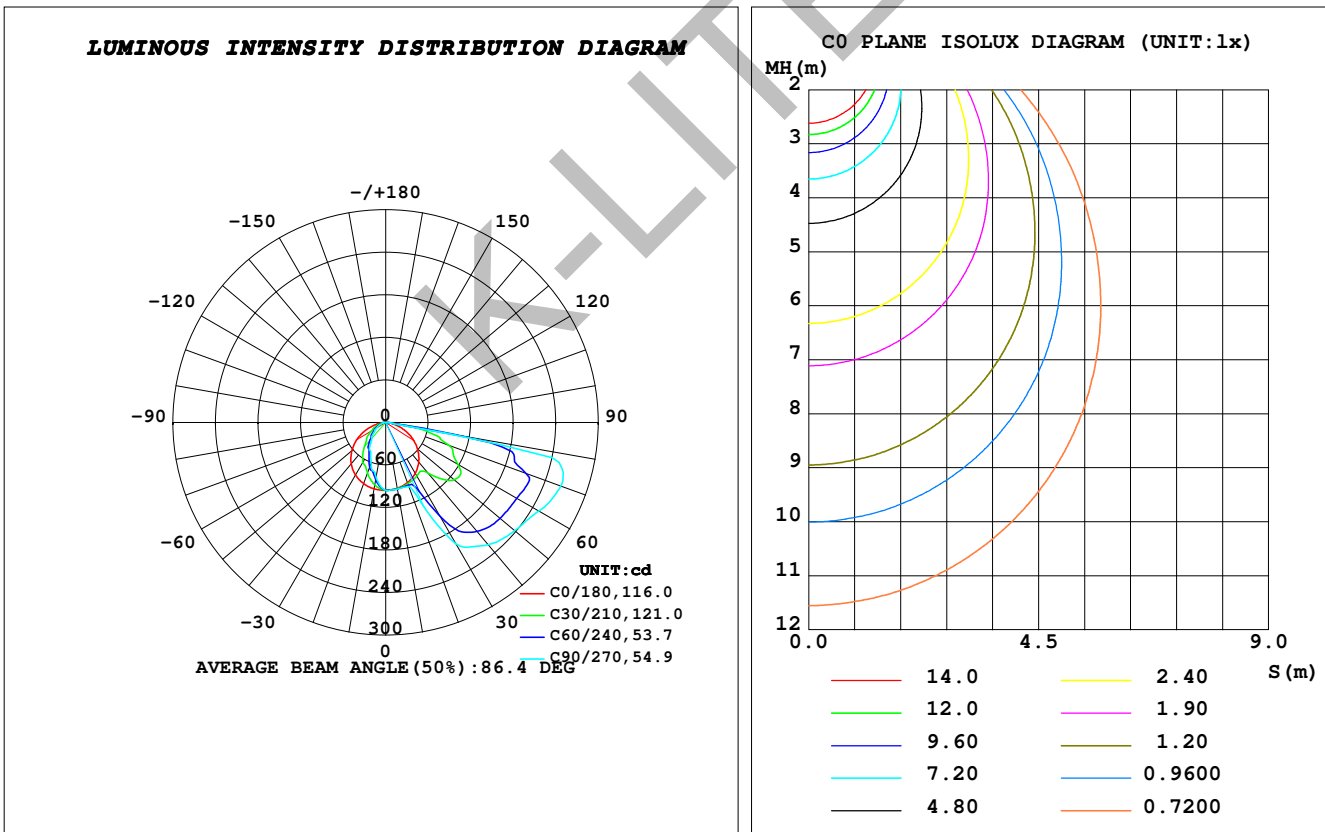

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: K-LITE
Test Date: 03 September 2022

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
Humidity: 65.0%
Test Distance: 1.852m [K=1.0000]
Remarks: