


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.47V I:0.0297A P:6.7199W PF:0.9823 Freq:50.00Hz Lamp Flux:864x1 lm		
NAME: RADO MINI - SURFACE MOUNTING	TYPE:PATH FINDERS	WEIGHT:
SPEC.:NW, NICHIA	DIM.: Sq.105 x 38	SERIAL No.:4871
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-2776	Imax (cd)	249.0	S/MH (C0/180)	1.31
NOMINAL POWER (W)	6	LOR (%)	51.3	S/MH (C90/270)	0.75
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	443.24	η UP, DN (C0-180)	0.0, 41.9
NOMINAL FLUX (lm)	864	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 9.4
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	230	η down (%)	51.3	CIBSE SHR MAX	1.35

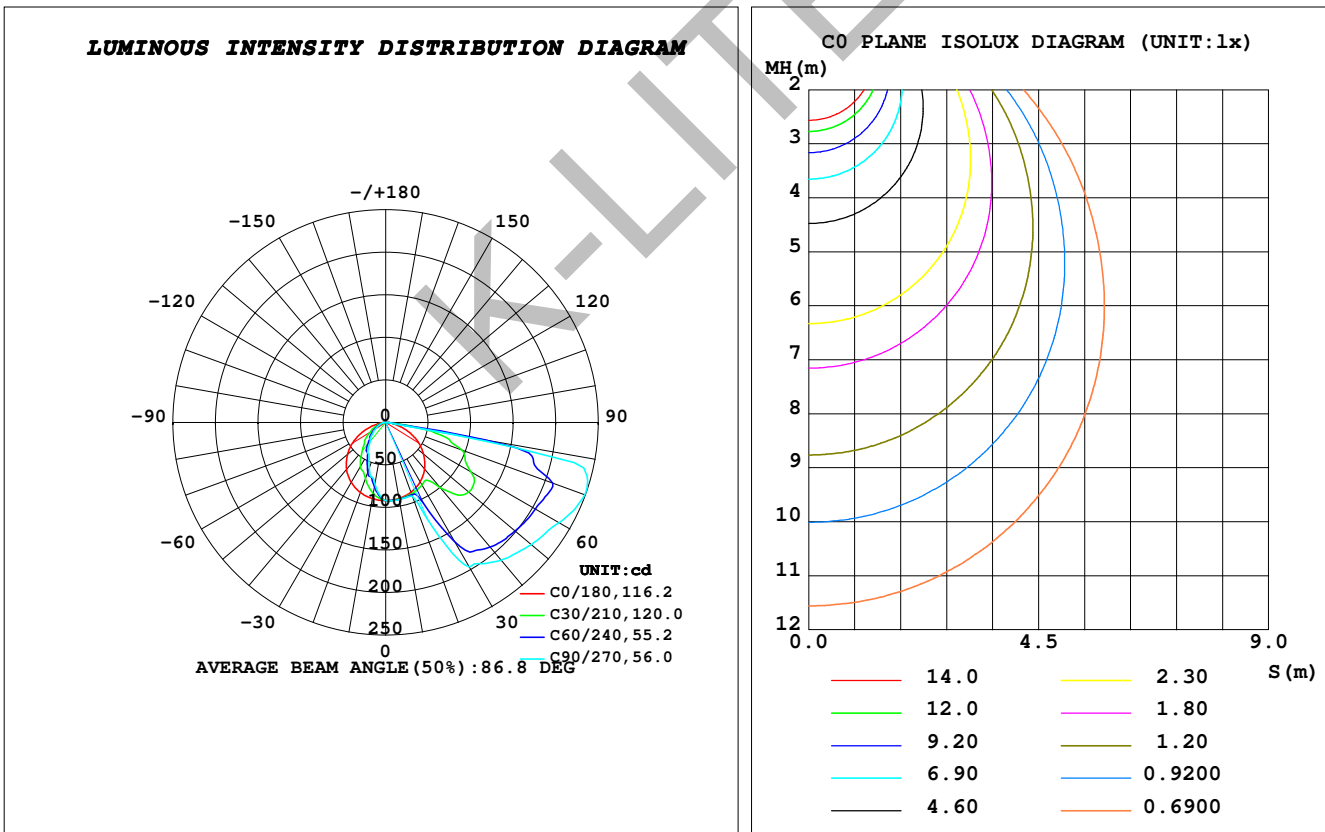

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: K-LITE
 Test Date: 03 September 2022

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
 Humidity: 65.0%
 Test Distance: 1.852m [K=1.0000]
 Remarks: