
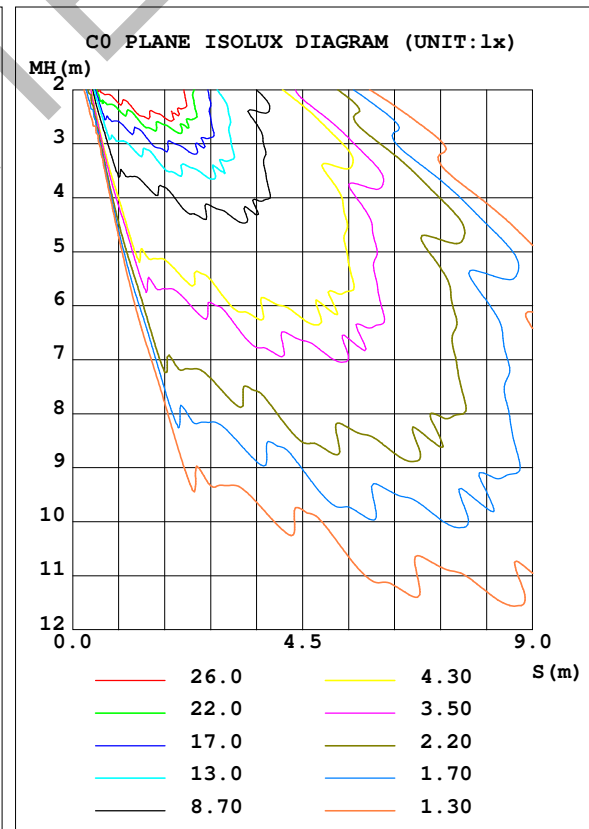


**LUMINAIRE PHOTOMETRIC TEST REPORT**

Test:U:230.51V I:0.0779A P:17.568W PF:0.9781 Freq:50.00Hz Lamp Flux:2335.68x1 lm		
NAME: NIMBUS BOLLARD	TYPE: BOLLARDS	WEIGHT:
SPEC.: WW, NICHIA	DIM.: Sq.121 x 1000	SERIAL No.: 4589
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-4726	Imax (cd)	471.0	S/MH (C0/180)	7.41
NOMINAL POWER (W)	16	LOR (%)	65.9	S/MH (C90/270)	7.48
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	1538.2	η UP, DN (C0-180)	3.9, 29.8
NOMINAL FLUX (lm)	2335.68	CIE CLASS	SEMI-D.	η UP, DN (C180-360)	3.8, 28.3
LAMPS INSIDE	1	η up (%)	7.7	CIBSE SHR NOM	1.00
TEST VOLTAGE (V)	230	η down (%)	58.2	CIBSE SHR MAX	1.00

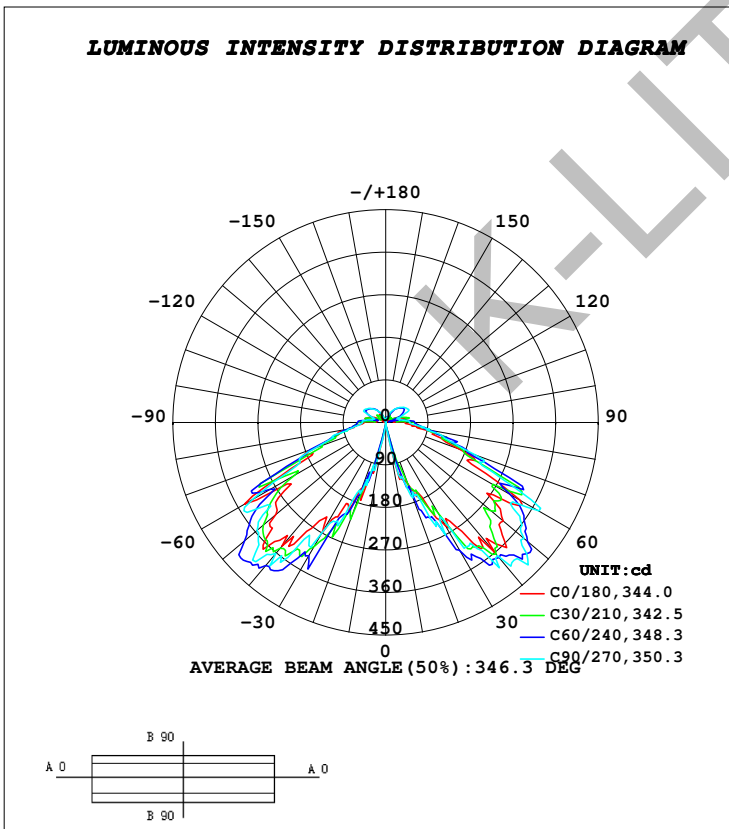

**C Range: 0 - 360DEG**  
**C Interval: 10.0DEG**  
**Test Speed: HIGH**  
**Temperature: 25.3DEG**  
**Operators: K-LITE**  
**Test Date: 01 June 2022**

**γ Range: 0 - 180DEG**  
**γ Interval: 1.0DEG**  
**Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.00.417**  
**Humidity: 65.0%**  
**Test Distance: 1.825m [K=1.0000]**  
**Remarks:**