


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.58V I:0.0281A P:6.3426W PF:0.9800 Freq:49.99Hz Lamp Flux:1036.8x1 lm		
NAME: SUDO MINI - GRID FRAME	TYPE:PATH FINDERS	WEIGHT:
SPEC.:NW, NICHIA	DIM.: 130 x 87 x 76	SERIAL No.:4866
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-2746	Imax (cd)	187.0	S/MH (C0/180)	1.24
NOMINAL POWER (W)	6	LOR (%)	19.3	S/MH (C90/270)	0.38
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	200.26	η UP, DN (C0-180)	0.0, 15.8
NOMINAL FLUX (lm)	1036.8	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 3.6
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.75
TEST VOLTAGE (V)	230	η down (%)	19.3	CIBSE SHR MAX	0.80

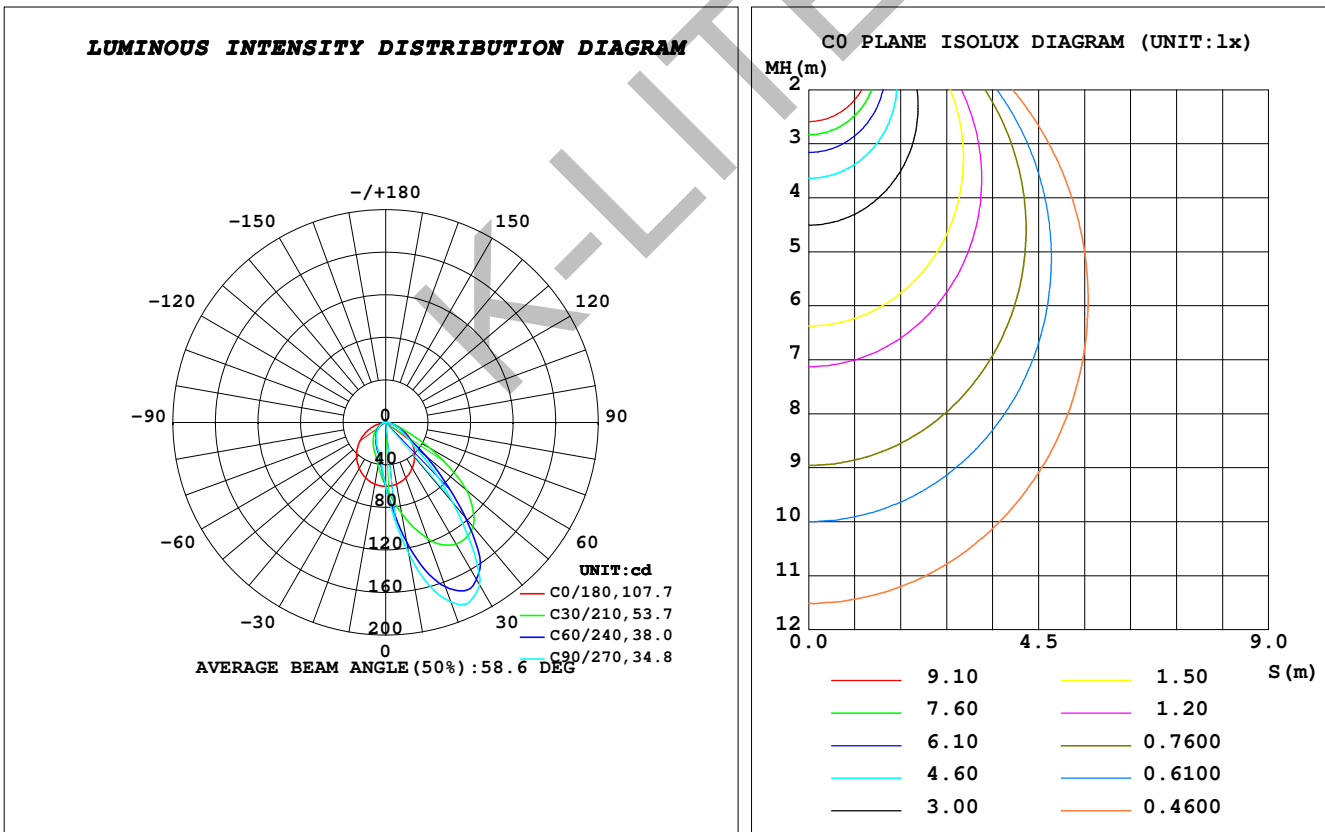

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: K-LITE
Test Date: 02 September 2022

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
Humidity: 65.0%
Test Distance: 1.852m [K=1.0000]
Remarks: