


**LUMINAIRE PHOTOMETRIC TEST REPORT**

Test:U:230.64V I:0.0137A P:3.0345W PF:0.9624 Freq:49.98Hz Lamp Flux:270x1 lm		
NAME: SUDO MINI - ASY VERTICAL REEDED FRAME	TYPE:PATH FINDERS	WEIGHT:
SPEC.:NW, NICHIA	DIM.: 76 x 87 x 130	SERIAL No.:4876
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-2750	Imax (cd)	73.58	S/MH (C0/180)	1.44
NOMINAL POWER (W)	3	LOR (%)	28.2	S/MH (C90/270)	0.96
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	76.192	η UP, DN (C0-180)	0.0, 23.4
NOMINAL FLUX (lm)	270	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 4.8
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE (V)	230	η down (%)	28.2	CIBSE SHR MAX	1.00

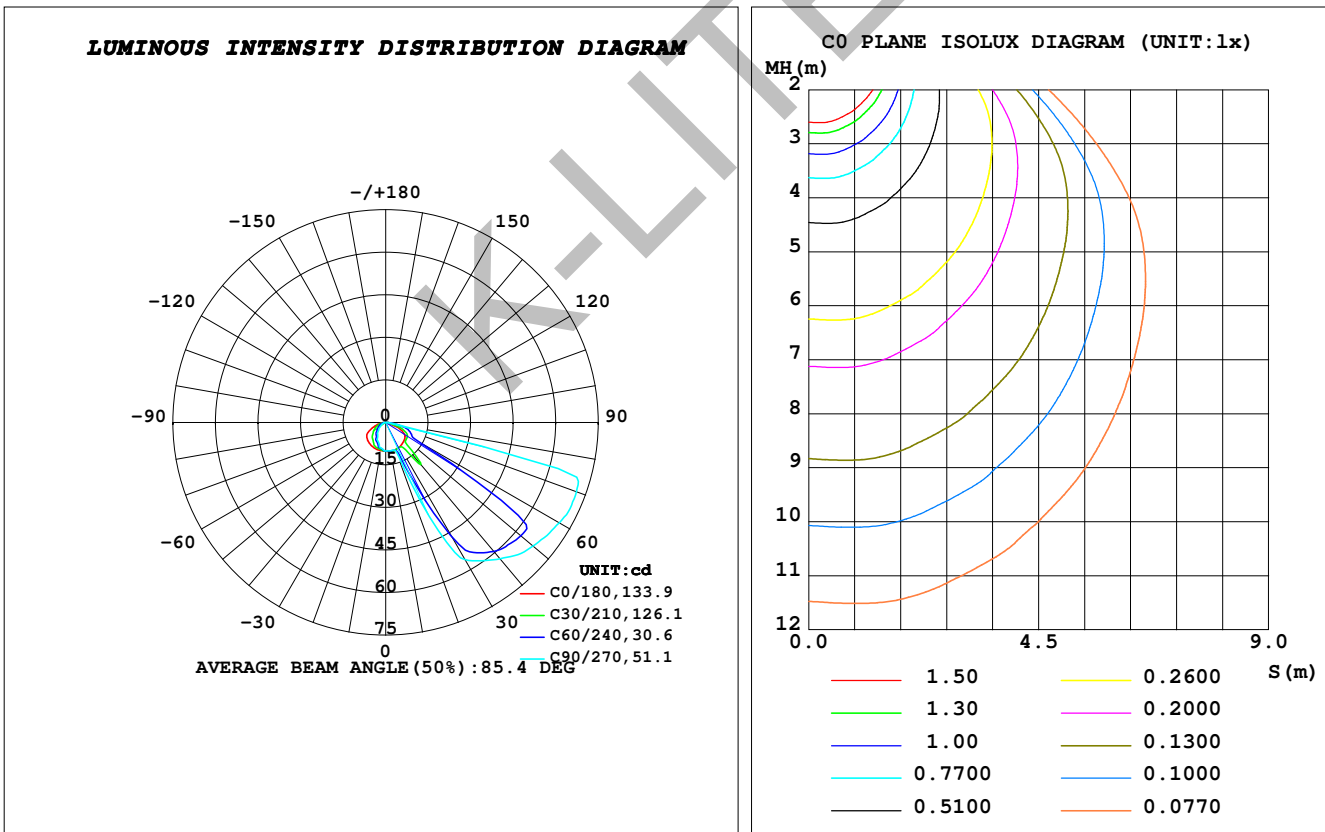

**C Range: 0 - 360DEG**  
**C Interval: 10.0DEG**  
**Test Speed: HIGH**  
**Temperature: 25.3DEG**  
**Operators: K-LITE**  
**Test Date: 05 September 2022**

**γ Range: 0 - 90DEG**  
**γ Interval: 1.0DEG**  
**Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.00.417**  
**Humidity: 65.0%**  
**Test Distance: 1.852m [K=1.0000]**  
**Remarks:**