


**LUMINAIRE PHOTOMETRIC TEST REPORT**

Test:U:230.65V I:0.0267A P:5.9274W PF:0.9618 Freq:49.99Hz Lamp Flux:593.04x1 lm		
NAME: SUDO - ASY VERTICAL REEDED FRAME	TYPE:PATH FINDERS	WEIGHT:
SPEC.:NW, LUMILED	DIM.: 76 x 87 x 255	SERIAL No.:4879
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-2763	Imax (cd)	193.4	S/MH (C0/180)	1.46
NOMINAL POWER (W)	6	LOR (%)	37.0	S/MH (C90/270)	0.80
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	219.66	η UP, DN (C0-180)	0.0, 30.7
NOMINAL FLUX (lm)	593.04	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 6.3
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE (V)	230	η down (%)	37.0	CIBSE SHR MAX	1.00

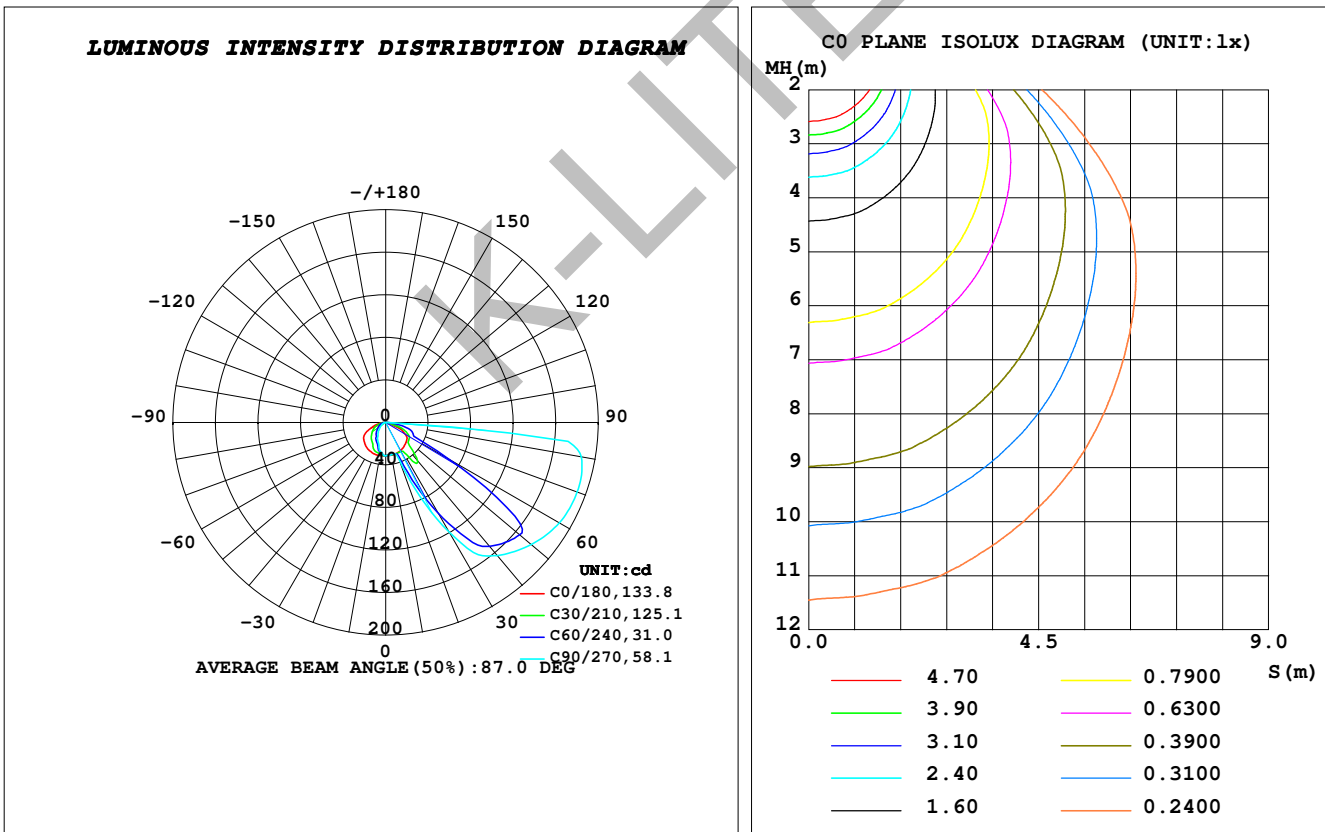

**C Range: 0 - 360DEG**  
**C Interval: 10.0DEG**  
**Test Speed: HIGH**  
**Temperature: 25.3DEG**  
**Operators: K-LITE**  
**Test Date: 05 September 2022**

**γ Range: 0 - 90DEG**  
**γ Interval: 1.0DEG**  
**Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.00.417**  
**Humidity: 65.0%**  
**Test Distance: 1.852m [K=1.0000]**  
**Remarks:**