


**LUMINAIRE PHOTOMETRIC TEST REPORT**

Test:U:230.70V I:0.0263A P:5.8096W PF:0.9569 Freq:49.99Hz Lamp Flux:567.42x1 lm		
NAME: SUDO - ASY VERTICAL REEDED FRAME	TYPE:PATH FINDERS	WEIGHT:
SPEC.:WW, LUMILED	DIM.: 76 x 87 x 255	SERIAL No.:4880
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-2763	Imax (cd)	191.9	S/MH (C0/180)	1.31
NOMINAL POWER (W)	6	LOR (%)	36.6	S/MH (C90/270)	0.77
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	207.82	η UP, DN (C0-180)	0.0, 29.8
NOMINAL FLUX (lm)	567.42	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 6.8
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE (V)	230	η down (%)	36.6	CIBSE SHR MAX	1.00

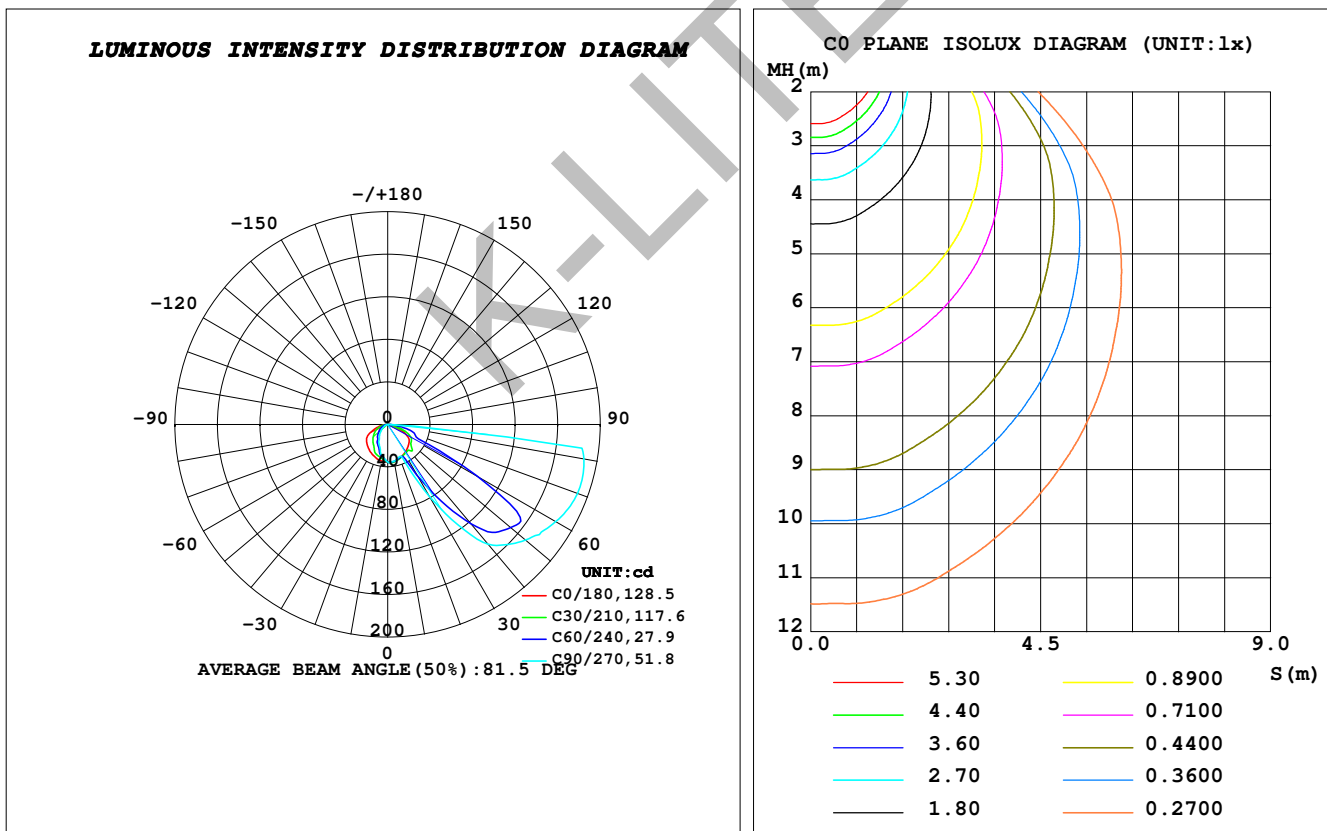

**C Range: 0 - 360DEG**  
**C Interval: 10.0DEG**  
**Test Speed: HIGH**  
**Temperature: 25.3DEG**  
**Operators: K-LITE**  
**Test Date: 05 September 2022**

**γ Range: 0 - 90DEG**  
**γ Interval: 1.0DEG**  
**Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.00.417**  
**Humidity: 65.0%**  
**Test Distance: 1.852m [K=1.0000]**  
**Remarks:**