


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.47V I:0.0134A P:2.9640W PF:0.9567 Freq:49.99Hz Lamp Flux:290x1 lm		
NAME: SUDO MINI - ARC FRAME	TYPE:PATH FINDERS	WEIGHT:
SPEC.:NW, NICHIA	DIM.: 76 x 87 x 130	SERIAL No.:4873
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-2768	Imax (cd)	62.79	S/MH (C0/180)	1.26
NOMINAL POWER (W)	3	LOR (%)	36.4	S/MH (C90/270)	1.17
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	87.402	η UP, DN (C0-180)	0.0, 26.4
NOMINAL FLUX (lm)	239.94	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 10.1
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.00
TEST VOLTAGE (V)	230	η down (%)	36.4	CIBSE SHR MAX	1.10

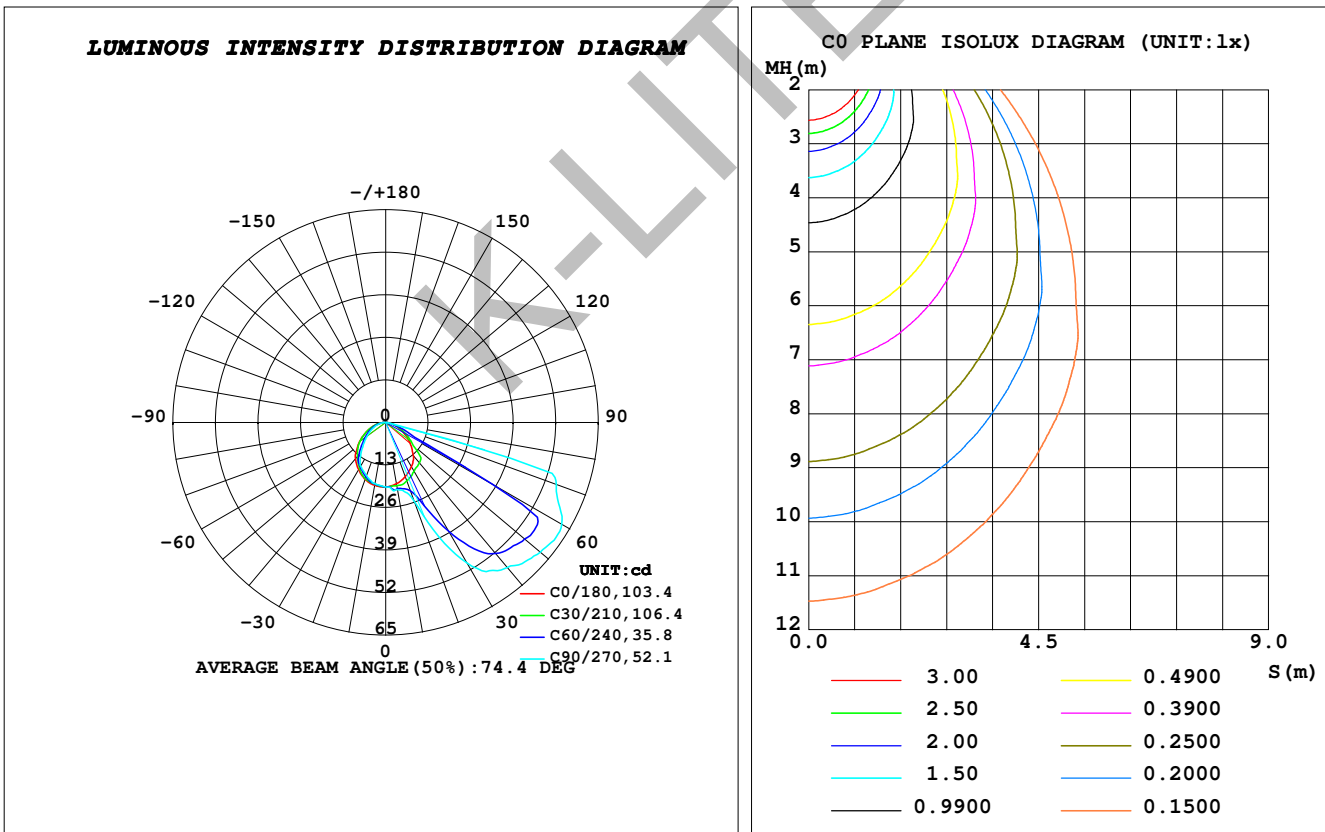

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: K-LITE
 Test Date: 03 September 2022

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
 Humidity: 65.0%
 Test Distance: 1.852m [K=1.0000]
 Remarks: