


**LUMINAIRE PHOTOMETRIC TEST REPORT**

Test:U:230.62V I:0.0269A P:6.0647W PF:0.9776 Freq:50.00Hz Lamp Flux:871.02x1 lm		
NAME: SUDO MINI - OPEN FRAME	TYPE:PATH FINDERS	WEIGHT:
SPEC.:WW, NICHIA	DIM.: 130 x 87 x 76	SERIAL No.:4862
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-2745	Imax (cd)	102.0	S/MH (C0/180)	1.26
NOMINAL POWER (W)	6	LOR (%)	32.8	S/MH (C90/270)	1.19
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	285.75	η UP, DN (C0-180)	0.0, 17.2
NOMINAL FLUX (lm)	871.02	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 15.6
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	230	η down (%)	32.8	CIBSE SHR MAX	1.35

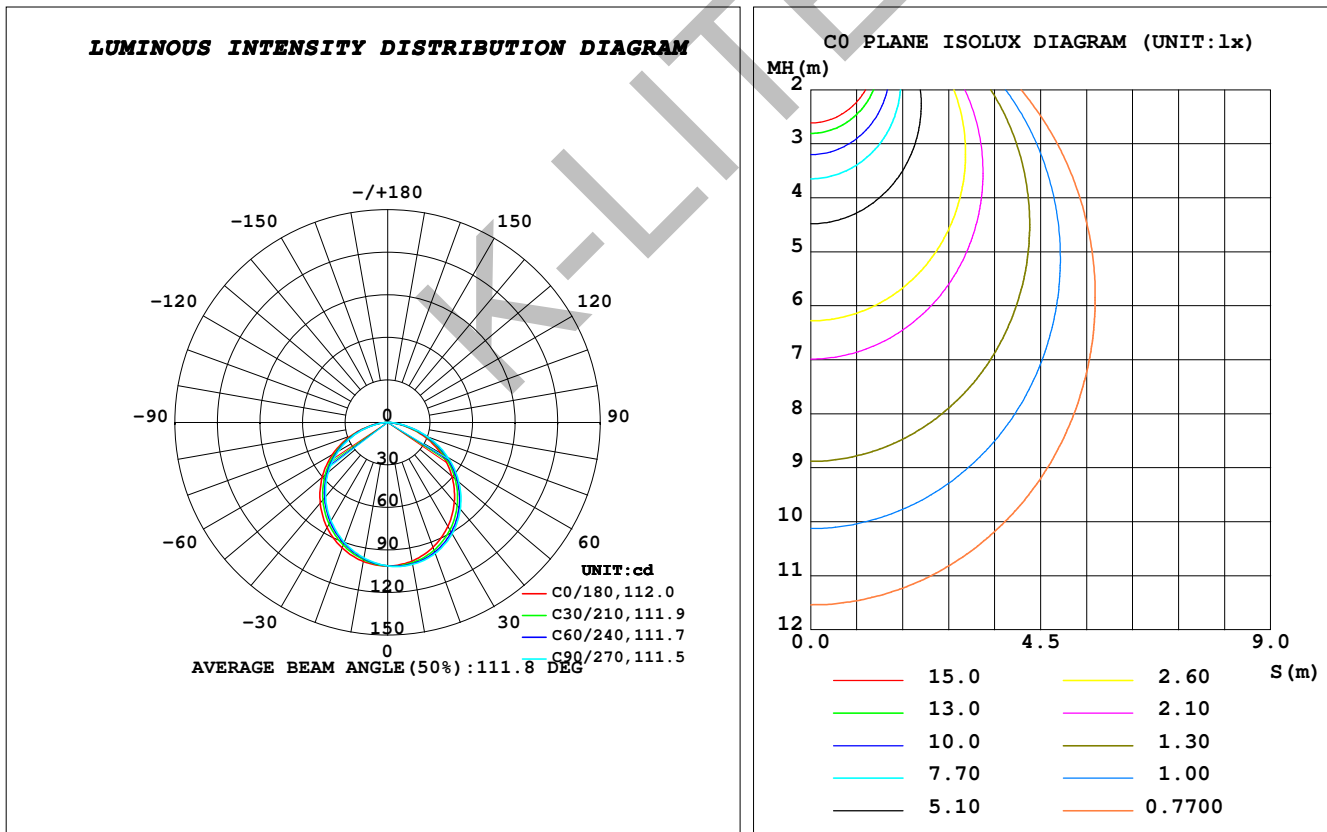

**C Range: 0 - 360DEG**  
**C Interval: 10.0DEG**  
**Test Speed: HIGH**  
**Temperature: 25.3DEG**  
**Operators: K-LITE**  
**Test Date: 01 September 2022**

**γ Range: 0 - 90DEG**  
**γ Interval: 1.0DEG**  
**Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.00.417**  
**Humidity: 65.0%**  
**Test Distance: 1.852m [K=1.0000]**  
**Remarks:**