


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.77V I:0.0537A P:12.157W PF:0.9807 Freq:49.99Hz Lamp Flux:1742.04x1 lm		
NAME: SUDO - ASY FRAME	TYPE:PATH FINDERS	WEIGHT:
SPEC.:WW, NICHIA	DIM.: 255 x 87 x 76	SERIAL No.:4765
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-2743	Imax (cd)	602.9	S/MH (C0/180)	1.30
NOMINAL POWER (W)	12	LOR (%)	42.7	S/MH (C90/270)	0.74
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	743.36	η UP, DN (C0-180)	0.0, 38.8
NOMINAL FLUX (lm)	1742.04	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 3.9
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE (V)	230	η down (%)	42.7	CIBSE SHR MAX	1.00

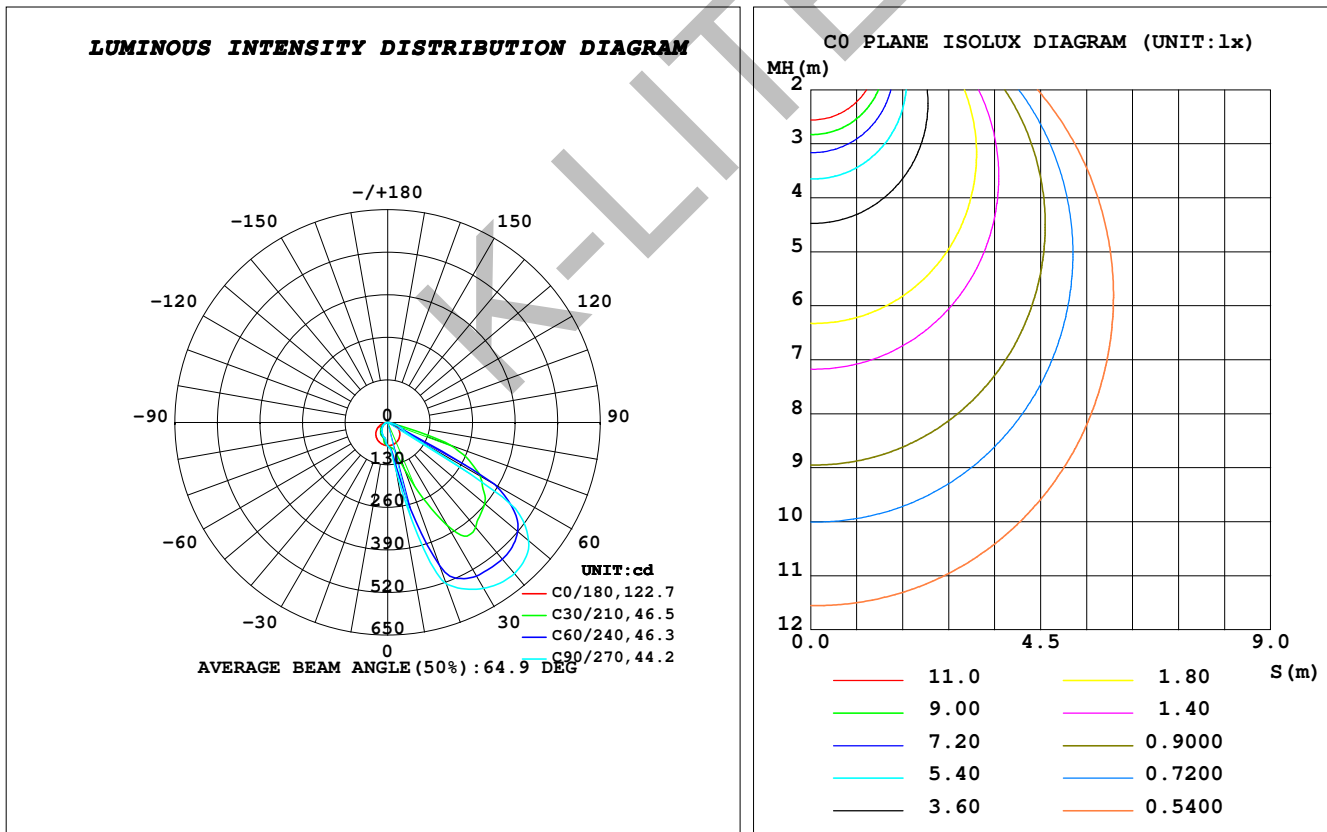

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: K-LITE
Test Date: 12 August 2022

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
Humidity: 65.0%
Test Distance: 1.852m [K=1.0000]
Remarks: