


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.61V I:0.1615A P:37.051W PF:0.9948 Freq:49.98Hz Lamp Flux:5801.77x1 lm		
NAME: WALL CYLIN	TYPE:WALL LUMINAIRES	WEIGHT:
SPEC.:NW, CITIZEN, BA-15°	DIM.: 216 x 166 x 200	SERIAL No.:5136
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-3652	Imax (cd)	27922	S/MH (C0/180)	0.22
NOMINAL POWER (W)	40	LOR (%)	53.8	S/MH (C90/270)	0.23
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	3121.5	η UP, DN (C0-180)	0.0, 25.9
NOMINAL FLUX (lm)	5801.77	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 27.9
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE (V)	230	η down (%)	53.8	CIBSE SHR MAX	1.00

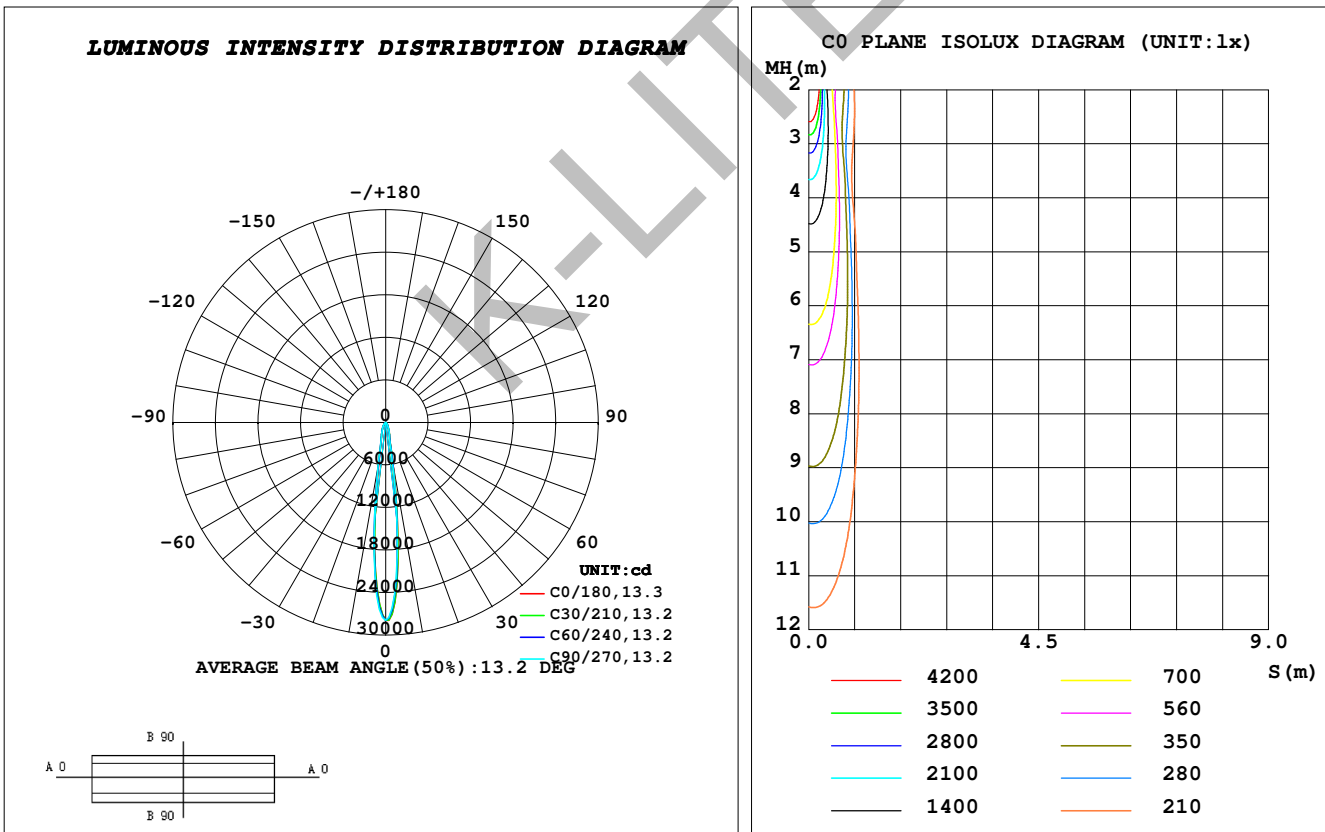

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: K-LITE
Test Date: 21 November 2022

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
Humidity: 65.0%
Test Distance: 1.852m [K=1.0000]
Remarks: