


### LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.60V I:0.0291A P:6.3906W PF:0.9522 Freq:49.99Hz Lamp Flux:832x1 lm		
NAME: WALL QUAD MINI	TYPE:WALL LUMINAIRES	WEIGHT:
SPEC.:NW, CITIZEN, BA-15°	DIM.: 150 x 100 x 150	SERIAL No.:5153
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-3635	Imax (cd)	4698	S/MH (C0/180)	0.26
NOMINAL POWER (W)	6	LOR (%)	78.2	S/MH (C90/270)	0.26
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	650.45	η UP, DN (C0-180)	0.0, 39.6
NOMINAL FLUX (lm)	832	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 38.5
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE (V)	230	η down (%)	78.2	CIBSE SHR MAX	1.00

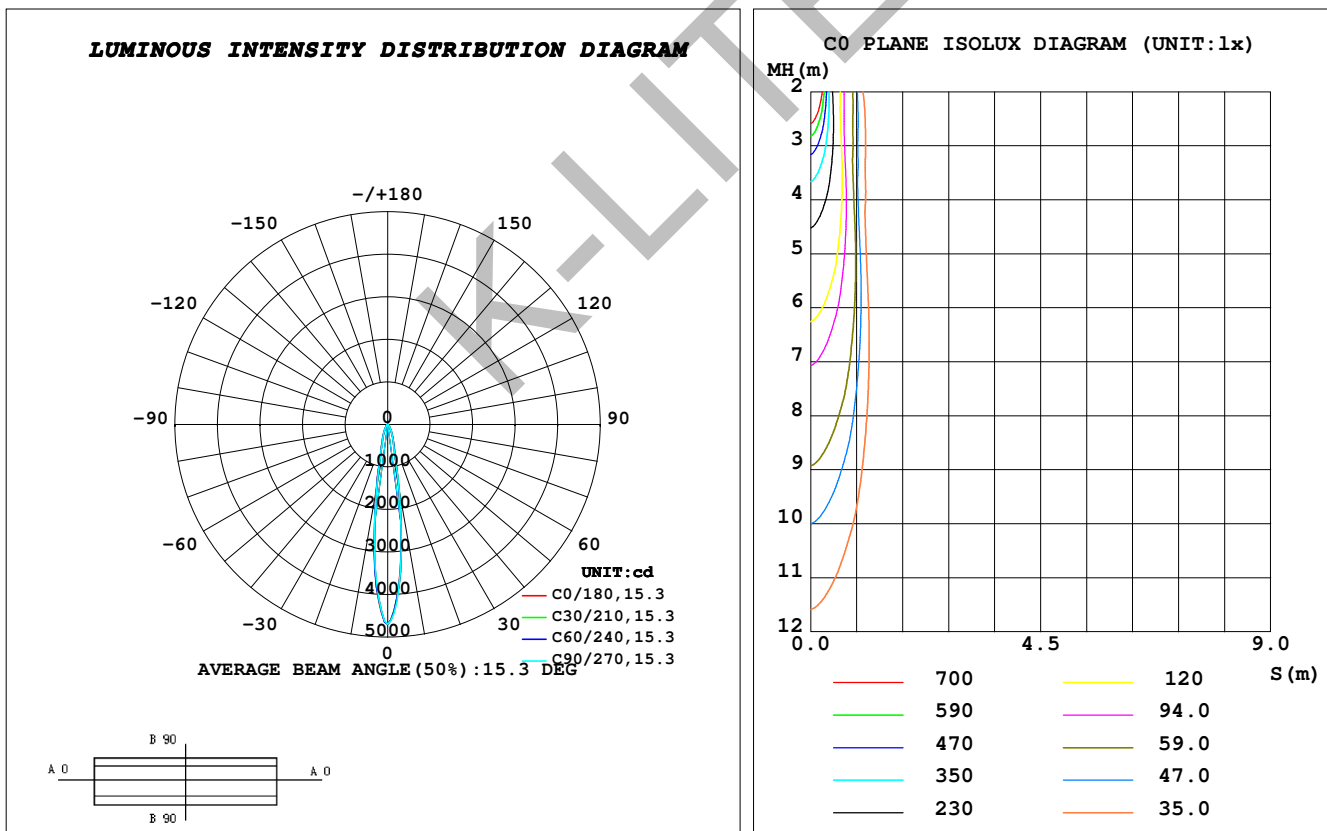

**C Range: 0 - 360DEG**  
**C Interval: 10.0DEG**  
**Test Speed: HIGH**  
**Temperature: 25.3DEG**  
**Operators: K-LITE**  
**Test Date: 22 November 2022**

**γ Range: 0 - 90DEG**  
**γ Interval: 1.0DEG**  
**Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.00.417**  
**Humidity: 65.0%**  
**Test Distance: 1.852m [K=1.0000]**  
**Remarks:**