


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.50V I:0.0530A P:11.932W PF:0.9770 Freq:50.00Hz Lamp Flux:1738.8x1 lm		
NAME: ZEDO - SURFACE MOUNTING	TYPE:PATH FINDERS	WEIGHT:
SPEC.:WW, NICHIA	DIM.: 220 x 40 x 95	SERIAL No.:4869
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-2767	Imax (cd)	576.3	S/MH (C0/180)	1.34
NOMINAL POWER (W)	12	LOR (%)	51.5	S/MH (C90/270)	0.76
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	895.11	η UP, DN (C0-180)	0.0, 45.5
NOMINAL FLUX (lm)	1738.8	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 6.0
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE (V)	230	η down (%)	51.5	CIBSE SHR MAX	1.00

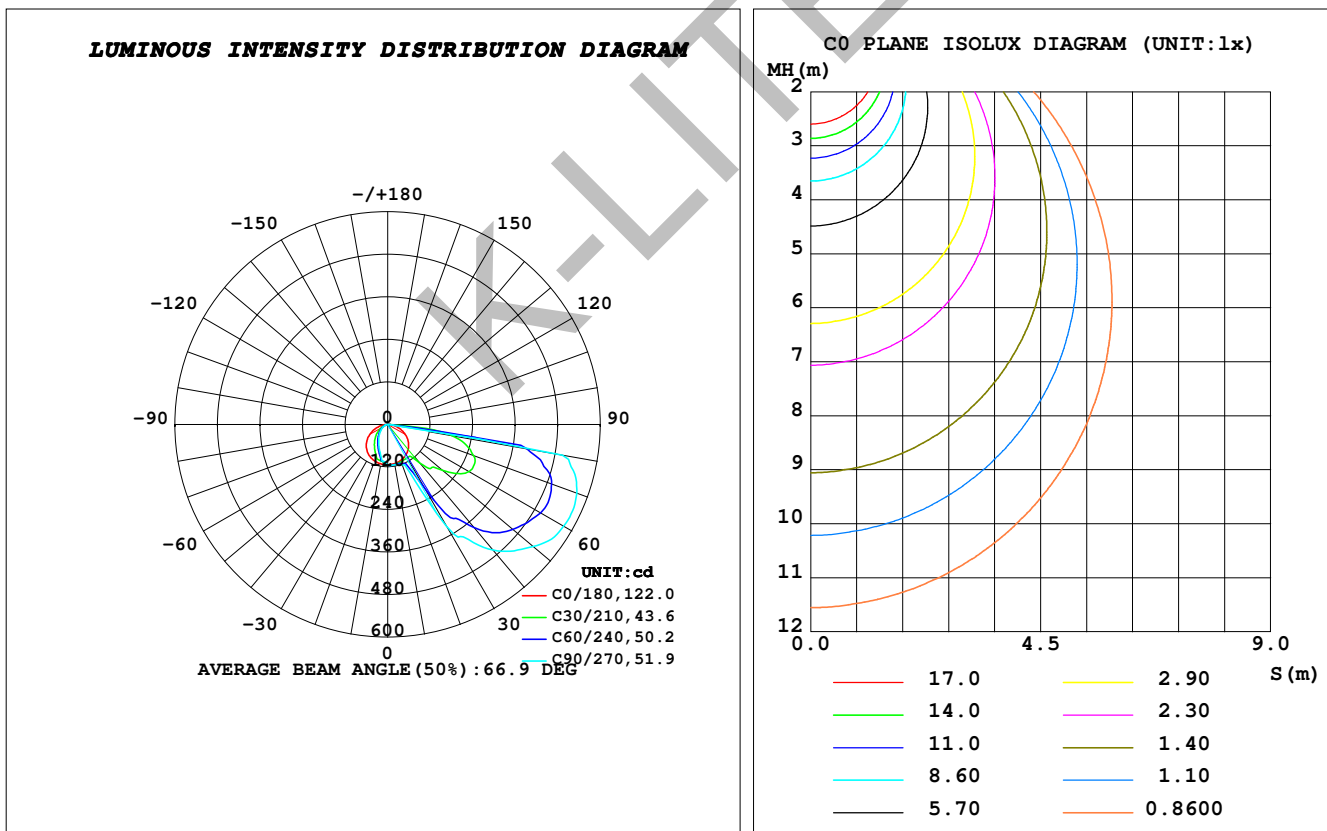

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: K-LITE
 Test Date: 03 September 2022

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
 Humidity: 65.0%
 Test Distance: 1.852m [K=1.0000]
 Remarks: