


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.38V I:0.0250A P:5.5117W PF:0.9572 Freq:49.99Hz Lamp Flux:559.86x1 lm		
NAME: SILL	TYPE:FACADE LUMINAIRES	WEIGHT:0.76Kg
SPEC.:WW, NICHIA	DIM.: 150 x 90 x 43	SERIAL No.:5239
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-3078	Imax (cd)	656.7	S/MH (C0/180)	1.40
NOMINAL POWER (W)	6	LOR (%)	31.9	S/MH (C90/270)	0.07
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	178.64	η UP, DN (C0-180)	0.0,15.1
NOMINAL FLUX (lm)	559.86	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0,16.8
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE (V)	230	η down (%)	31.9	CIBSE SHR MAX	1.00

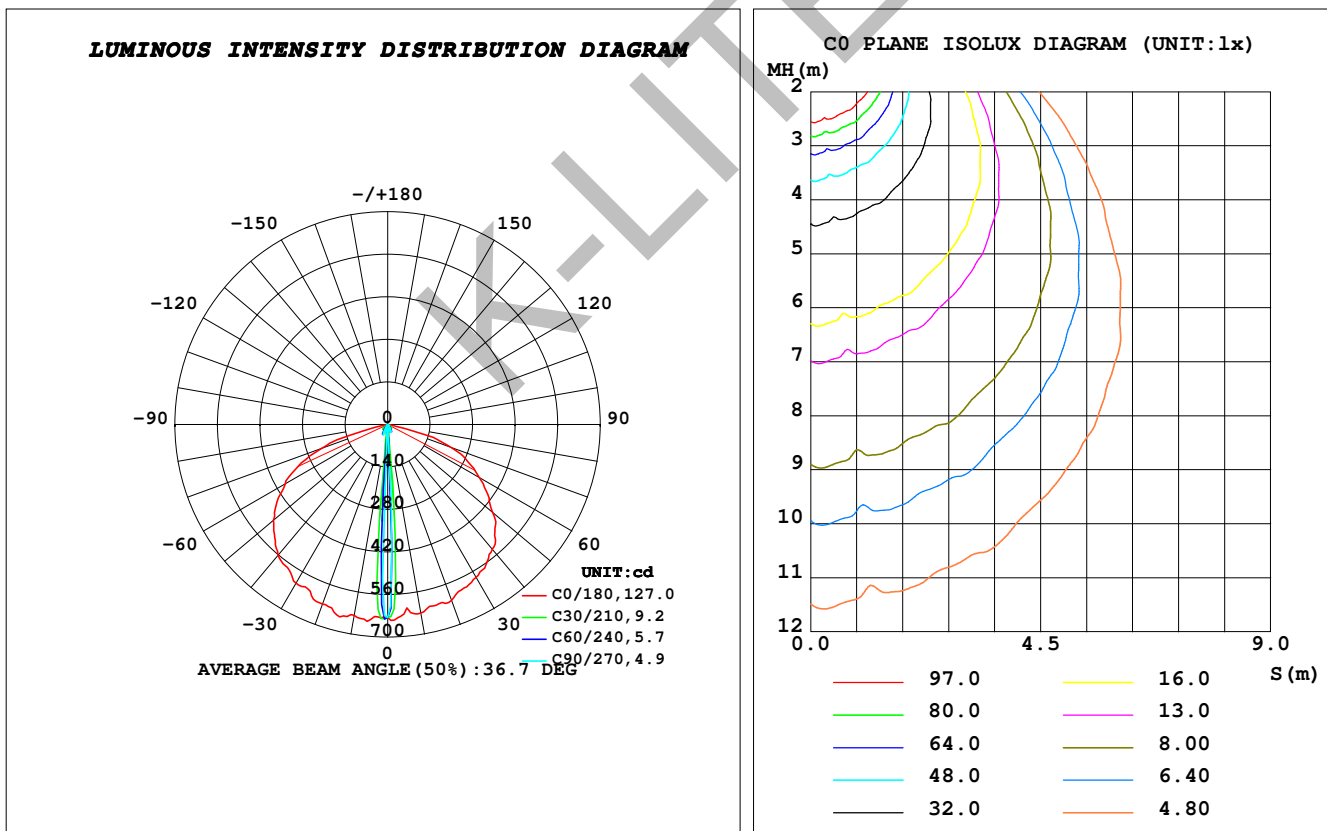

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:K-LITE
Test Date:10 December 2022

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.417
Humidity:65.0%
Test Distance:1.852m [K=1.0000]
Remarks: