


**LUMINAIRE PHOTOMETRIC TEST REPORT**

Test:U:230.14V I:0.0368A P:7.4071W PF:0.8757 Freq:49.81Hz Lamp Flux:980x1 lm		
NAME: LINE N DOT - LINEAR DOWN LIGHT	TYPE:RECESSED CEILING	WEIGHT:0.180Kg
SPEC.:4000K, NICHIA, BA-20°, 80 CRI	DIM.: 106 x 45.5 x 50	SERIAL No.:INT/2023/07/47B
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-3379	Imax (cd)	2887	S/MH (C0/180)	0.48
NOMINAL POWER (W)	6	LOR (%)	79.4	S/MH (C90/270)	0.46
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	778.10	η UP, DN (C0-180)	0.0, 38.8
NOMINAL FLUX (lm)	980	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 40.6
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE (V)	230	η down (%)	79.4	CIBSE SHR MAX	1.00

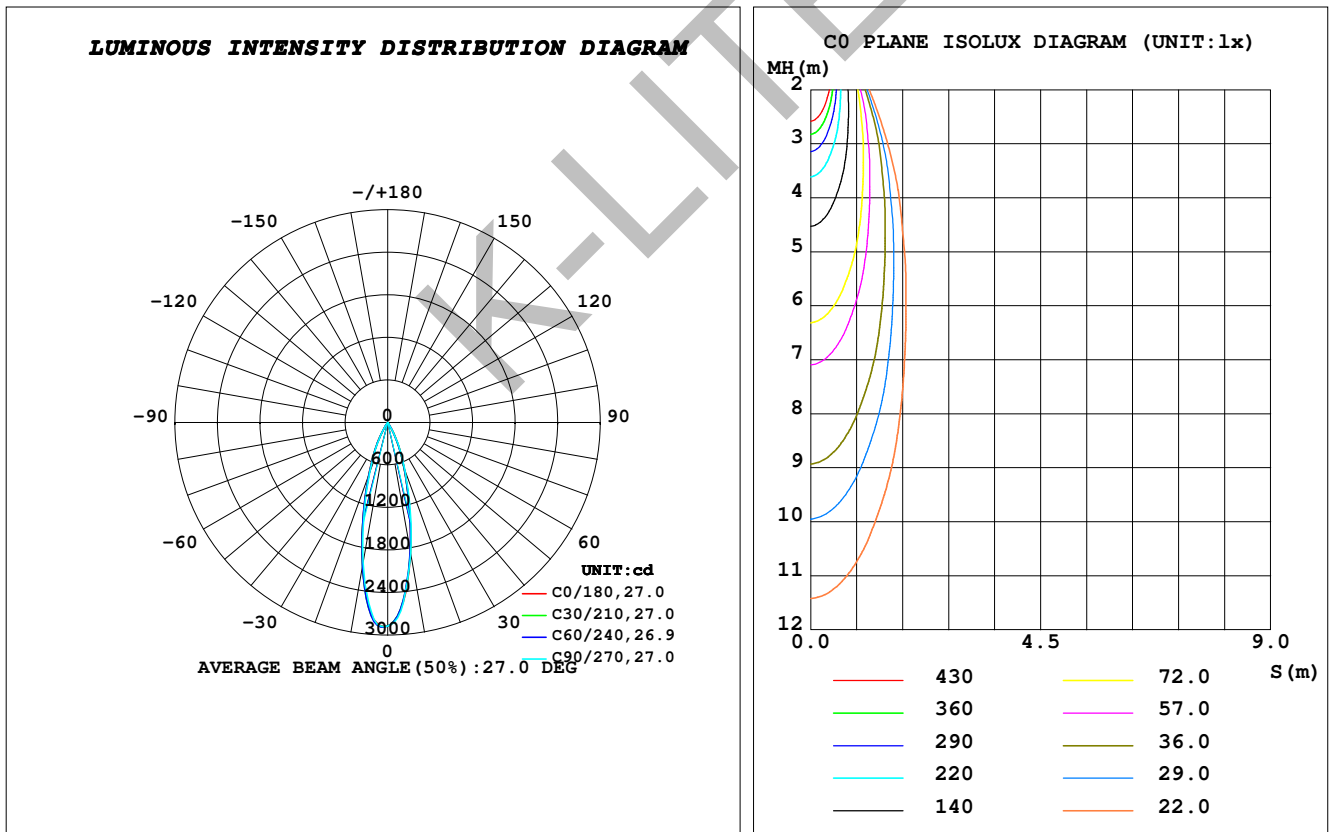

**C Range: 0 - 360DEG**  
**C Interval: 10.0DEG**  
**Test Speed: HIGH**  
**Temperature: 25.6DEG**  
**Operators: K-LITE**  
**Test Date: 21 July 2023**

**γ Range: 0 - 90DEG**  
**γ Interval: 1.0DEG**  
**Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.00.417**  
**Humidity: 45.5%**  
**Test Distance: 1.944m [K=1.0000]**  
**Remarks:**