


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.17V I:0.0367A P:7.3983W PF:0.8753 Freq:49.79Hz Lamp Flux:980x1 lm		
NAME: LINE N DOT - LINEAR DOWN LIGHT	TYPE:RECESSED CEILING	WEIGHT:0.180Kg
SPEC.:4000K, NICHIA, BA-34°, 80 CRI	DIM.: 106 x 45.5 x 50	SERIAL No.:INT/2023/07/47C
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 105.50 lm/W			
MODEL	KL-3379	I _{max} (cd)	2280	S/MH (C0/180)	0.57
NOMINAL POWER (W)	6	LOR (%)	79.6	S/MH (C90/270)	0.57
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	780.55	η UP, DN (C0-180)	0.0, 38.4
NOMINAL FLUX (lm)	980	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 41.3
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	230	η down (%)	79.6	CIBSE SHR MAX	0.60

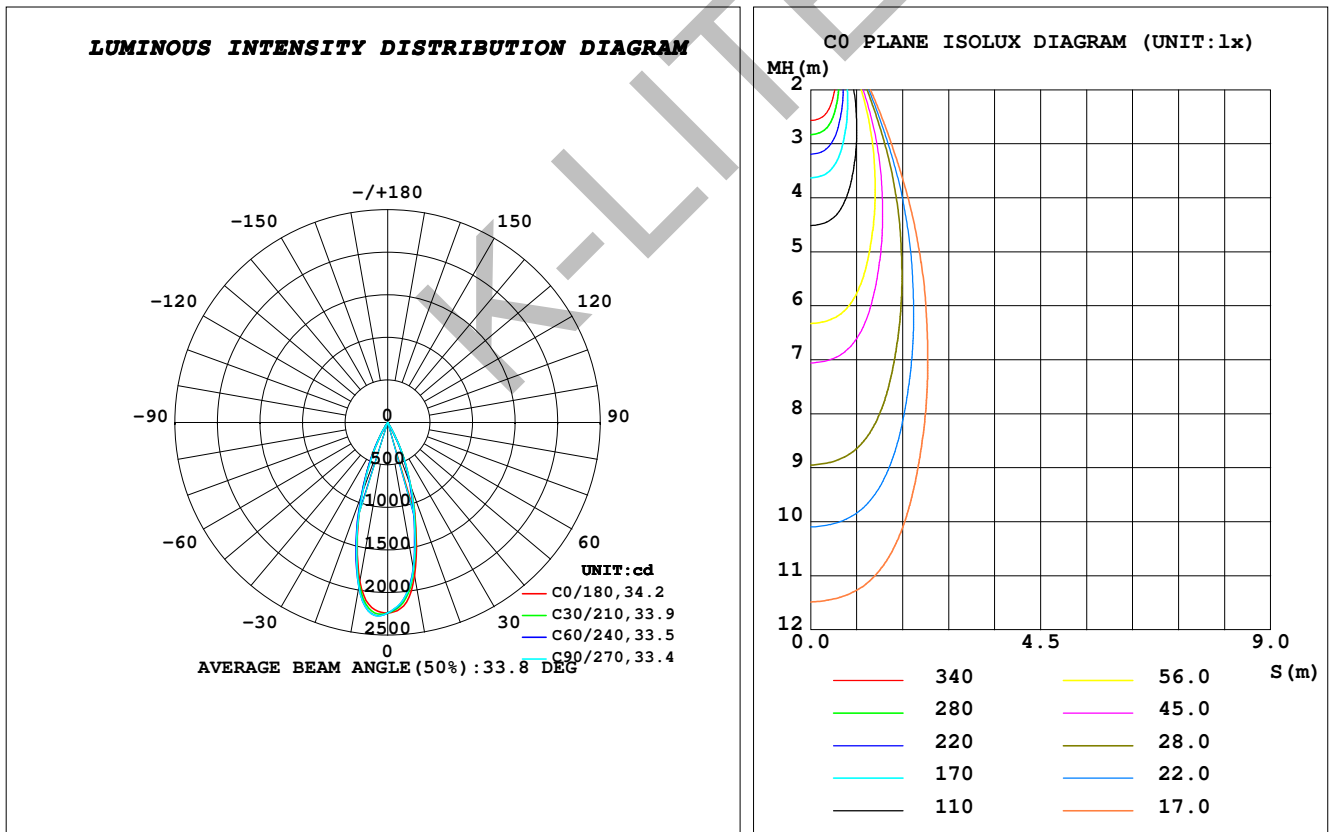

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.6DEG
Operators: K-LITE
Test Date: 21 July 2023

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
Humidity: 45.6%
Test Distance: 1.944m [K=1.0000]
Remarks: