
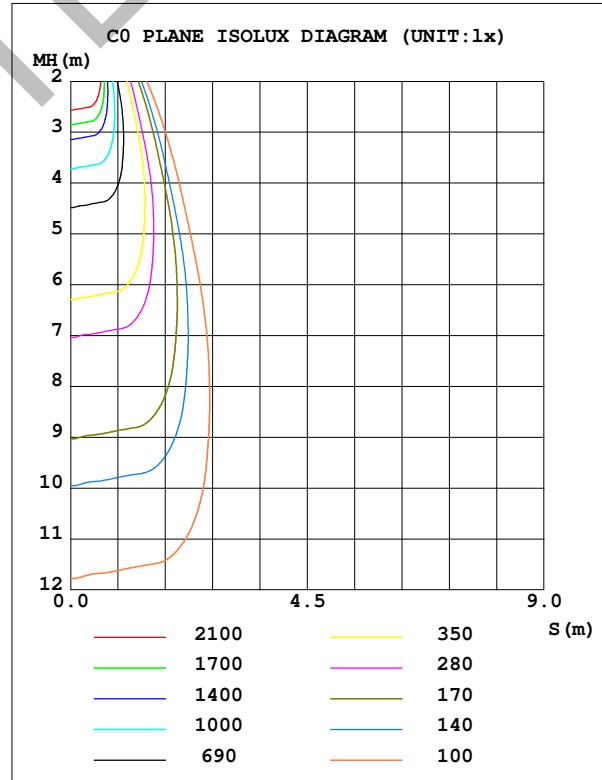


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.23V I:0.1560A P:35.588W PF:0.9912 Freq:50.00Hz Lamp Flux:4582x1 lm		
NAME: EVO - PENDANT - DIRECT - INDIRECT	TYPE:LINEAR LIGHTING	WEIGHT:1.900Kg
SPEC.:4000K, NICHIA, BA-12°, 80 CRI	DIM.: 1212 x 36 x 75	SERIAL No.:INT/2023/08/04A
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-3522	Imax (cd)	14371	S/MH (C0/180)	0.67
NOMINAL POWER (W)	40	LOR (%)	95.3	S/MH (C90/270)	0.31
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	4368.1	η UP, DN (C0-180)	0.0, 48.4
NOMINAL FLUX (lm)	4582	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 46.9
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE (V)	230	η down (%)	95.3	CIBSE SHR MAX	1.00

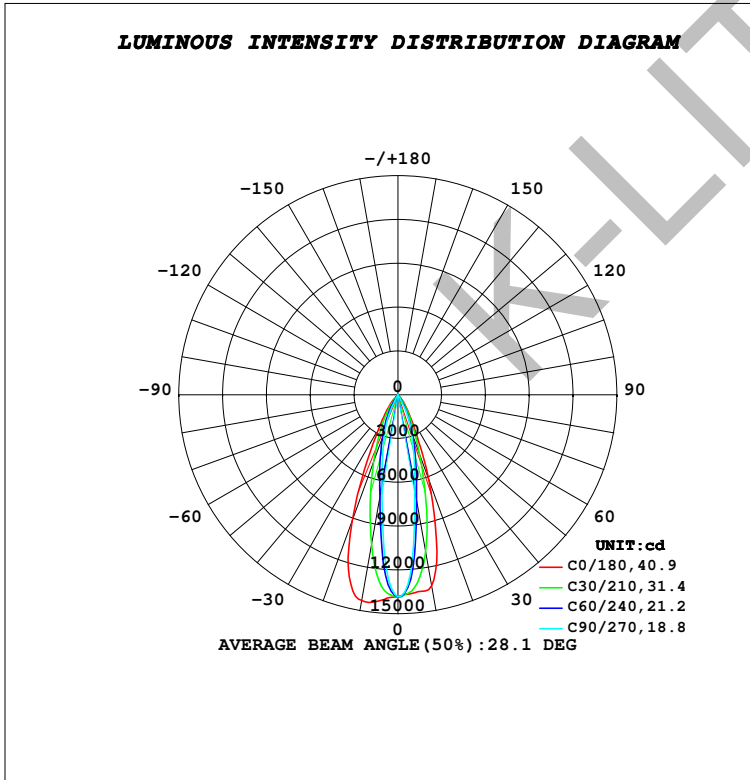

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.7DEG
 Operators: K-LITE
 Test Date: 08 August 2023

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
 Humidity: 45.6%
 Test Distance: 1.944m [K=1.0000]
 Remarks: