
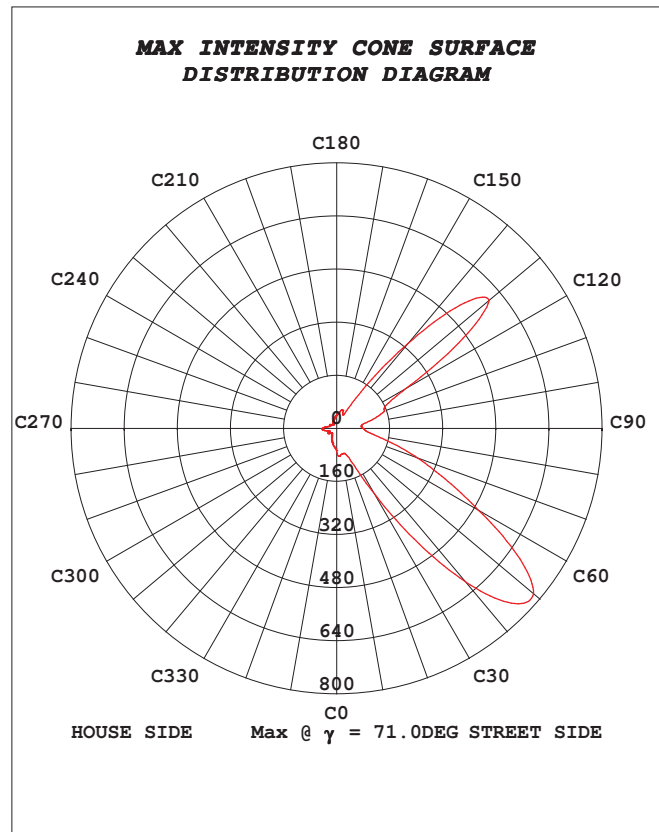


**STREETLIGHT PHOTOMETRIC TEST REPORT**

Test:U:230.50V I:0.0887A P:20.228W PF:0.9892 Freq:49.99Hz Lamp Flux:3029.69x1 lm		
NAME: NAVYA MINI	TYPE:POLE MOUNTED SYSTEMS	WEIGHT:1.315 kg
SPEC.:3000K, NICHIA, CRI 80,TYPE III	DIM.: 250 x 50 x 153	SERIAL No.:INT/2024/05/39
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 97.32 lm/W
MODEL	KL-4367	I <sub>max</sub> (cd)	774.4	η street_up (%)	0.0	
NOMINAL POWER (W)	24	LOR (%)	65.0	η street_down (%)	42.5	
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	1969	η house_up (%)	0.0	
NOMINAL FLUX (lm)	3029.69	MAXIMUM @ (C, γ )	50, 71.0	η house_down (%)	22.5	
LAMPS INSIDE	1	η up (%)	0.0	76 FLASHAREA (m2)	0.00100	
TEST VOLTAGE (V)	230	η down (%)	65.0	SLI	15.451	

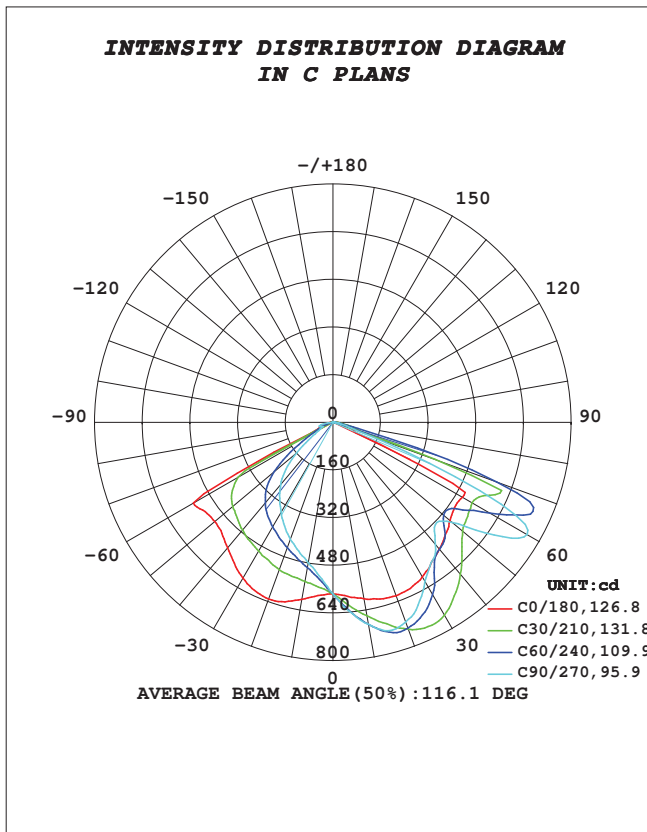

C Range: 0 - 360DEG  
C Interval: 10.0DEG  
Test Speed: HIGH  
Temperature: 25.5DEG  
Operators:K-LITE  
Test Date:14 May 2024

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.00.417  
Humidity: 39.2%  
Test Distance:1.997m [K=1.0000]  
Remarks: APPLICABLE MODEL : ID-4453