
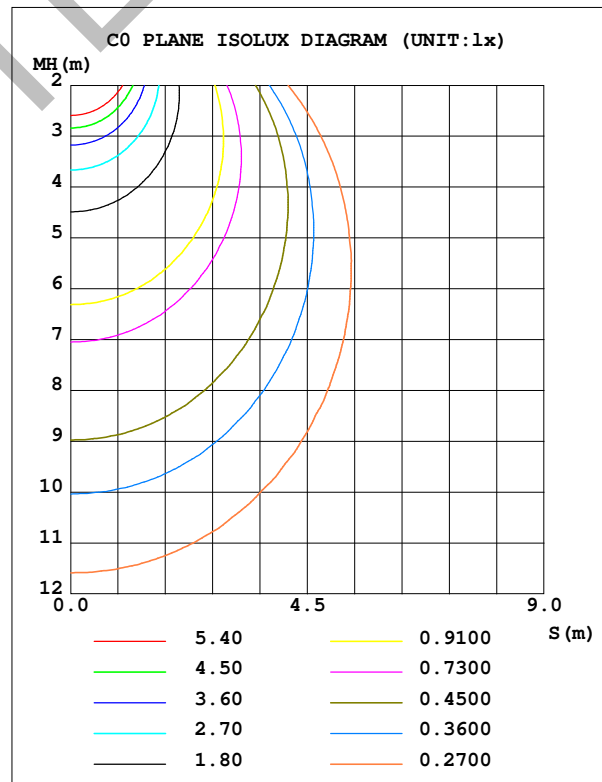


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.31V I:0.0646A P:6.6820W PF:0.9844 Freq:49.98Hz Lamp Flux:802.9x1 lm		
NAME: SUDO - GRID FRAME	TYPE:PATH FINDERS	WEIGHT:0.8Kg
SPEC.:WW, NICHIA	DIM.: 255 x 87 x 76	SERIAL No.:0658
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 15.62 lm/W
MODEL	KL-2755	I _{max} (cd)	110.0	S/MH (C0/180)	1.11	
NOMINAL POWER (W)	6	LOR (%)	13.0	S/MH (C90/270)	0.18	
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	104.34	η UP, DN (C0-180)	0.0, 12.2	
NOMINAL FLUX (lm)	802.9	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 0.8	
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.75	
TEST VOLTAGE (V)	230	η down (%)	13.0	CIBSE SHR MAX	0.85	

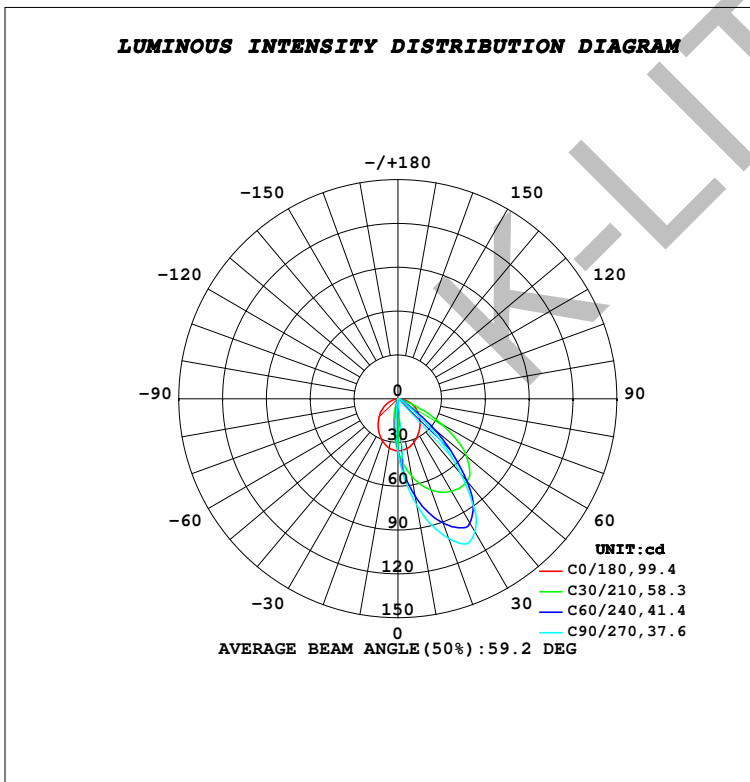

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: K-LITE
 Test Date: 31 December 2019

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
 Humidity: 65.0%
 Test Distance: 1.825m [K=1.0000]
 Remarks: