


Diva Deep Round recess mounted range of LED ceiling lights are a perfect fit for varied lighting applications. The die cast aluminium housing is ideal for better thermal management. High lumen output / Different wattage & CCT options make this luminaire versatile for superior glare free indoor lighting solutions.

### Product Description

- LED ceiling recessed back-lit panel light - Indoor luminaire with soft uniform Light distribution.
- Luminaire made of die-cast aluminium for better thermal management.
- High efficiency diffuser for glare free, uniform light distribution.
- High lumen output
- High PF constant current LED driver with surge and thermal protection.
- Cable entries for through-wiring of mains supply cable.
- Suitable for operation on 240V, 50Hz single phase ac supply.
- Ordering guide : KL-3323-CCT ( Colour Temperature )
- Available CCT : 3000K, 4000K, 6000K.



### Product Benefits

- Flexible deployment options with a wide spectrum of applications.
- Quick & simple installation.
- Diffuser upto 85% transmission level for better efficiency and higher lumens output.

### Area of Application

Lobbies & Foyers, Retail Sector, Corporate Office, Airports & Hospitals, Residential & Educational premises, Hospitality Industry, Commercial & Business Centers, Interior Traffic areas.

### Available Finish

White epoxy polyester powder coating.





**Technical Specifications**

**General**

ID	: 3321
Product Wattage	: 12W LED
COD	: Ø110
Driver Integrated	: Constant Current
Input Voltage	: 230-240Vac
Frequency	: 50-60Hz
Operating Voltage	: 90-265Vac
Operating Temperature	: -15°~+50°C

**Physical**

Body	: Die-cast aluminium
Diffuser	: Opal High Transmission
Mounting	: Ceiling recess / Fixed
Finish	: White epoxy polyester powder coating

**Light Source**


Light Source	: EPISTAR
LED Lumens	: 1500 lm
CRI (Ra)	: >80
LED Colour Temperature	: 3000K / 4000K / 6500K

**Driver**


Power Supply	: Integrated
Power Factor	: >0.90
THD	: <20%
Surge Protection	: 2.5KV
Efficiency	: >83%
Dimmable options	: Triac / 1-10V / Dali

**Optical Performance**

Colour Temperature	: 3000K
Luminous flux	: 1055 lm
Beam Angle	: 120° (Fixed)

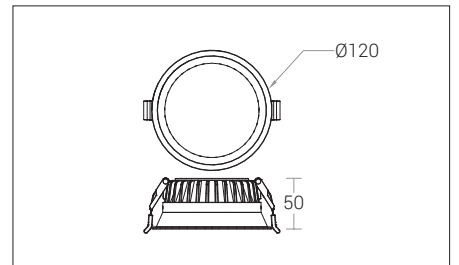

**Light Distribution**





**Technical Specifications**

**General**

ID	: 3322
Product Wattage	: 18W LED
COD	: Ø138
Driver Integrated	: Constant Current
Input Voltage	: 230-240Vac
Frequency	: 50-60Hz
Operating Voltage	: 90-265Vac
Operating Temperature	: -15°~+50°C

**Physical**

Body	: Die-cast aluminium
Diffuser	: Opal High Transmission
Mounting	: Ceiling recess / Fixed
Finish	: White epoxy polyester powder coating

**Light Source**


Light Source	: EPISTAR
LED Lumens	: 2250 lm
CRI (Ra)	: >80
LED Colour Temperature	: 3000K / 4000K / 6500K

**Driver**


Power Supply	: Integrated
Power Factor	: >0.90
THD	: <20%
Surge Protection	: 2.5KV
Efficiency	: >83%
Dimmable options	: Triac / 1-10V / Dali

**Optical Performance**

Colour Temperature	: 3000K
Luminouse flux	: 1835 lm
Beam Angle	: 120° (Fixed)

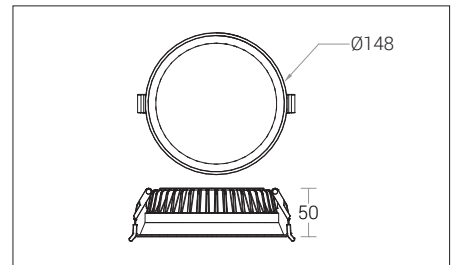

**Light Distribution**





**Technical Specifications**

**General**

ID	: 3323
Product Wattage	: 24W LED
COD	: Ø160
Driver Integrated	: Constant Current
Input Voltage	: 230-240Vac
Frequency	: 50-60Hz
Operating Voltage	: 90-265Vac
Operating Temperature	: -15°~+50°C

**Physical**

Body	: Die-cast aluminium
Diffuser	: Opal High Transmission
Mounting	: Ceiling recess / Fixed
Finish	: White epoxy polyester powder coating

**Light Source**


Light Source	: EPISTAR
LED Lumens	: 3000 lm
CRI (Ra)	: >80
LED Colour Temperature	: 3000K / 4000K / 6500K

**Driver**

Power Supply	: Integrated
Power Factor	: >0.90
THD	: <20%
Surge Protection	: 2.5KV
Efficiency	: >83%
Dimmable options	: Triac / 1-10V / Dali

**Optical Performance**

Colour Temperature	: 3000K
Luminouse flux	: 2485 lm
Beam Angle	: 120° (Fixed)

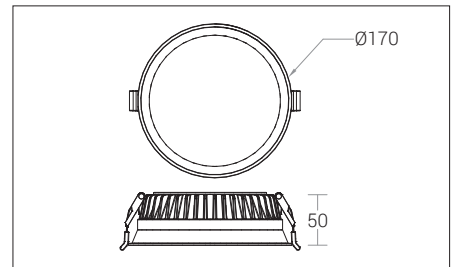







 90-265V 50-60Hz

**Light Distribution**

