

Diva Deep Round recess mounted range of LED ceiling lights are a perfect fit for varied lighting applications. The die cast aluminium housing is ideal for better thermal management. High lumen output / Different wattage & CCT options make this luminaire versatile for superior glare free indoor lighting solutions.

Product Description

- LED ceiling recessed back-lit panel light - Indoor luminaire with soft uniform Light distribution.
- Luminaire made of die-cast aluminium for better thermal management.
- High efficiency diffuser for glare free, uniform light distribution.
- High lumen output
- High PF constant current LED driver with surge and thermal protection.
- Cable entries for through-wiring of mains supply cable.
- Suitable for operation on 240V, 50Hz single phase ac supply.
- Ordering guide : KL-3323-CCT (Colour Temperature)
- Available CCT : 3000K, 4000K, 6000K.



Product Benefits

- Flexible deployment options with a wide spectrum of applications.
- Quick & simple installation.
- Diffuser upto 85% transmission level for better efficiency and higher lumens output.

Area of Application

Lobbies & Foyers, Retail Sector, Corporate Office, Airports & Hospitals, Residential & Educational premises, Hospitality Industry, Commercial & Business Centers, Interior Traffic areas.

Available Finish

White epoxy polyester powder coating.





Technical Specifications

General

ID	: 3324
Product Wattage	: 12W LED
COD	: □100
Driver Integrated	: Constant Current
Input Voltage	: 230-240Vac
Frequency	: 50-60Hz
Operating Voltage	: 90-265Vac
Operating Temperature	: -15°~+50°C

Physical

Body	: Die-cast aluminium
Diffuser	: Opal High Transmission
Mounting	: Ceiling recess / Fixed
Finish	: White epoxy polyester powder coating

Light Source


Light Source	: EPISTAR
LED Lumens	: 1500 lm
CRI (Ra)	: >80
LED Colour Temperature	: 3000K / 4000K / 6500K

Driver

Power Supply	: Integrated
Power Factor	: >0.90
THD	: <20%
Surge Protection	: 2.5KV
Efficiency	: >83%
Dimmable options	: Triac / 1-10V / Dali

Optical Performance

Colour Temperature	: 3000K
Luminouse flux	: 967 lm
Beam Angle	: 120° (Fixed)

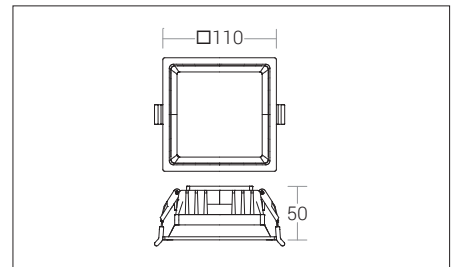







 50,000hrs L70 B10 SDCM≤3  90-265V 50-60Hz

Light Distribution





Technical Specifications

General

ID	: 3325
Product Wattage	: 18W LED
COD	: □133
Driver Integrated	: Constant Current
Input Voltage	: 230-240Vac
Frequency	: 50-60Hz
Operating Voltage	: 90-265Vac
Operating Temperature	: -15°~+50°C

Physical

Body	: Die-cast aluminium
Diffuser	: Opal High Transmission
Mounting	: Ceiling recess / Fixed
Finish	: White epoxy polyester powder coating

Light Source


Light Source	: EPISTAR
LED Lumens	: 2250 lm
CRI (Ra)	: >80
LED Colour Temperature	: 3000K / 4000K / 6500K







Driver

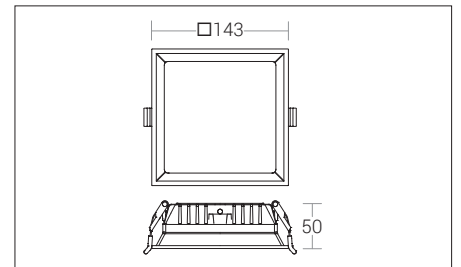Power Supply	: Integrated
Power Factor	: >0.90
THD	: <20%
Surge Protection	: 2.5KV
Efficiency	: >83%
Dimmable options	: Triac / 1-10V / Dali


Optical Performance

Colour Temperature	: 3000K
Luminouse flux	: 1865 lm
Beam Angle	: 120° (Fixed)








 50,000hrs L70 B10 SDCM≤3  90-265V 50-60Hz

Light Distribution





Technical Specifications

General

ID	: 3326
Product Wattage	: 24W LED
COD	: □155
Driver Integrated	: Constant Current
Input Voltage	: 230-240Vac
Frequency	: 50-60Hz
Operating Voltage	: 90-265Vac
Operating Temperature	: -15°~+50°C

Physical

Body	: Die-cast aluminium
Diffuser	: Opal High Transmission
Mounting	: Ceiling recess / Fixed
Finish	: White epoxy polyester powder coating

Light Source


Light Source	: EPISTAR
LED Lumens	: 3000 lm
CRI (Ra)	: >80
LED Colour Temperature	: 3000K / 4000K / 6500K

Driver

Power Supply	: Integrated
Power Factor	: >0.90
THD	: <20%
Surge Protection	: 2.5KV
Efficiency	: >83%
Dimmable options	: Triac / 1-10V / Dali

Optical Performance

Colour Temperature	: 3000K
Luminous flux	: 2639 lm
Beam Angle	: 120° (Fixed)

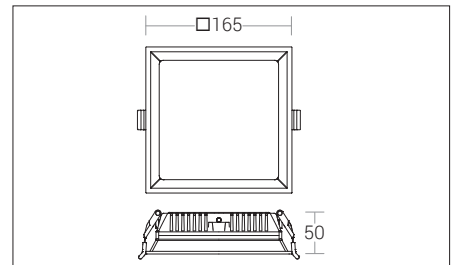









Light Distribution





K-LITE

K-LITE INDUSTRIES
India's Lighting Company

D-10, Ambattur Industrial Estate,
Chennai - 600 058.

T: 26257710, 48581950.
F: 26257866
M: 95000 79797, 95000 85511
E: info@klite.in
W: www.klite.in

Unit II
23B, SIDCO Industrial Estate,
Chennai - 600 098.

Unit IV
Plot No.E29, E30, Industrial Area,
Phase-II, Mandideep Tehsil,
Goharganj District-462046.
Raisen (MP).

London
Ridgeland House, 1st Floor,
15 Carfax, Horsham,
West Sussex, RH12 1DY.

Unit III
179 & 180, SIDCO Industrial
Estate, Chennai - 600 098.

Unit V
Experience Centre
G8, Ambattur Industrial Estate,
Chennai - 600 058.

Experience Centre - Delhi NCR
L-14/10, DLF City,
Phase - II, Gurgaon - 122002,
Haryana.