


K-LITE

Line n Dot - Linear Down Light

Power: 20W 30W
Length: 312mm 462mm



Features

- Nichia LED's
- CRI Ra>80 (>90 On Request)
- SDCM ≤ 3
- L70 / B10 @ 60,000 Hrs



Options

- CCT : 3000K / 4000K / 5700K or TW 2700K to 5700K
- Driver options



L2: Vacuum Metalized Chrome Finish, UGR <12


Beam Angle



SURFACE MOUNTED



Dimension
in mm

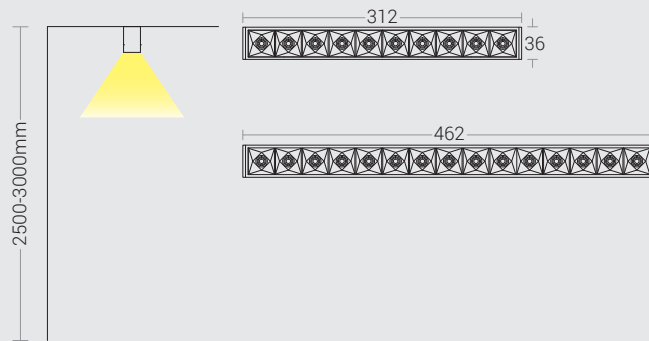

Housing Colour

- High-quality aluminium with powder coated finish in
Black fine texture | White fine texture | Grey fine texture



L2



Technical Specifications

General

Driver : Constant Current
 Input Voltage : 220-240Vac
 Operating Temperature : -15°C~+50°C

Light Source

Light Source : NICHIA
 CRI (Ra) : >80 (>90 On Request)
 LED Colour Temperature : 3000K / 4000K / 5700K

Optical

Efficiency : >90%
 Tilt : Fixed
 Beam Angle : 12°, 20°, 34°, 48°, 60°
 Diffuser/Lens Material : Polycarbonate
 Diffuser Finish : Vacuum Metalized
 Chrome Finish
 UGR : <12

Physical

Body : High-Grade Aluminium
 with Die-cast Endcaps
 Mounting : Surface Mounted
 Finish : White / Black / Grey

Driver

Power Supply : Integral
 Power Factor : >0.90
 THD : <10%
 Surge Protection : 2 - 3KV
 Efficiency : >85%



Ordering Guide

Surface Mounted

| ID | Wattage | Dimension (mm) |
|------|---------|----------------|
| 3431 | 20W | 312 x 36 x 75 |
| 3432 | 30W | 462 x 36 x 75 |