

K-LITE

UP & DOWN

Power : Upto 2 x 20W
Length : 1220mm

Upto
100
lm/w

Features

- Bridgelux / Equivalent LED's
- CRI Ra>80 (>90 On Request)
- SDCM \leq 3
- L70 / B10 @ 50,000 Hrs



Options

- CCT : 3000K / 4000K / 6000K
- Driver options




Beam Angle



Diffused

SURFACE / PENDANT

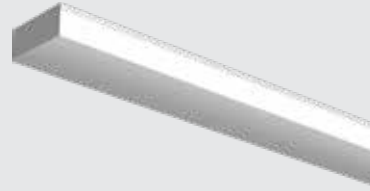

Dimension
in mm




Housing Colour

- Extruded aluminium with powder coated finish in
RAL9016 White fine texture | RAL9006 Grey fine texture



Open Source

[Light Distribution refer online](#)

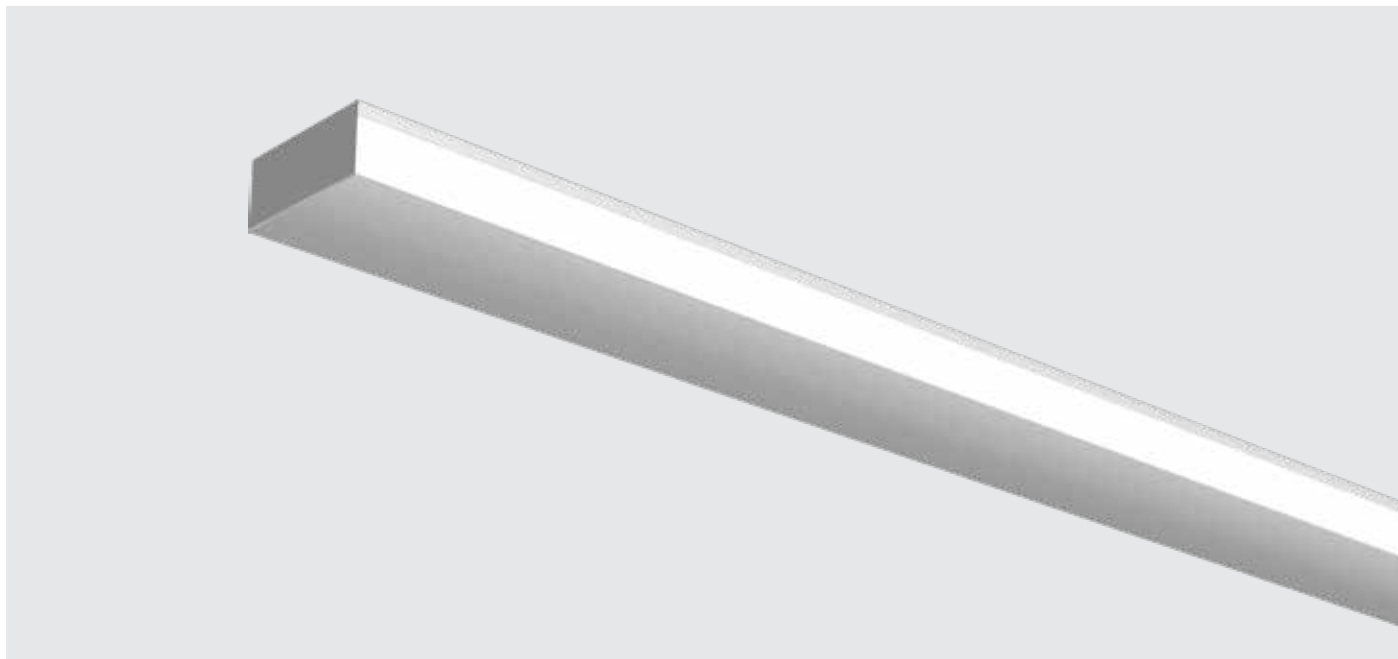

Technical Specifications

General

Driver	: Constant Current
Input Voltage	: 230-240Vac
Frequency	: 50-60Hz
Operating Temperature	: -15°C~+50°C

Physical

Body	: Extruded Aluminium Profile
Mounting	: Wall
Finish	: White(RAL9016) Grey (RAL 9006)

Light Source

Light Source	: Bridgelux / Equivalent
CRI (Ra)	: >80 (>90 On Request)
LED Colour Temperature	: 3000K / 4000K / 6000K

Driver

Power Supply	: Integrated
Power Factor	: >0.90
THD	: <15%
Surge Protection	: Upto 3KV
Efficiency	: >85%

Optical

Tilt	: Fixed
Beam Angle	: 115°
Diffuser Material	: PC Opal Matte



Ordering Guide

Wall - Up Down

ID	Wattage	Dimension (mm)
2861	Upto 2 x 20W	1220 x 90 x 42