

LED compact spot light luminaires designed to provide directional light. The luminaire comes with a connecting cable and bracket for permanent installation on a wall, under a ceiling or on floor.

### Product Description

- Luminaire made of pressure die cast aluminium of high corrosion resistance and non corrosive stainless steel fasteners.
- Clear tempered glass.
- Mounting die-cast aluminium bracket arrangement to facilitate easy installation at any desired location.
- Rotary ring to adjust focusing from 15°- 60° beam angles (Zoomable).
- Cable entries for through-wiring of mains supply cable.
- CRI (Ra) : >80 (90 CRI - On Request).
- Prewired with LED driver and suitable for operating on 240V, 50Hz single phase ac supply.
- Ordering guide : KL-2591-CCT (Colour Temperature).
- Available CCT : 3000K (Other CCT's on request)



### Product Benefits


- Sturdy construction in order to maintain performance of the luminaire and to reduce maintenance costs.
- Quick & simple installation.
- Clear glass in the front with continuous rubber gasket to ensure adequate sealing against ingress of moisture, dust, insects etc.,
- Sustainable LED technology offers durability and optimal light output with low power consumption.

### Area of Application


Pathways, Parks, Sculptures, Gardens, Structures and Landscape lighting.

### Available Finish

Powder coated anthracite grey.

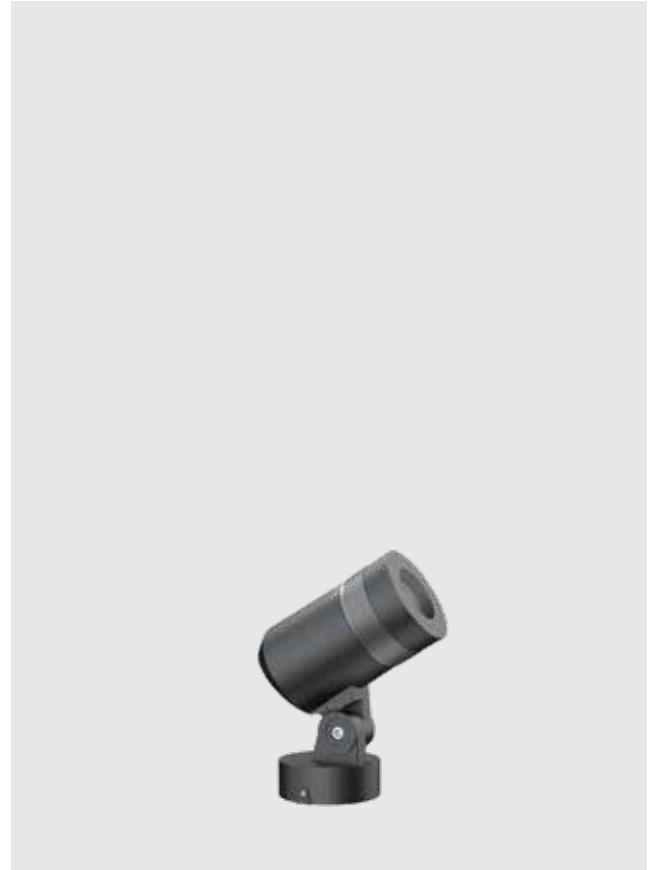

**Note** : It is our constant endeavor to upgrade the performance of our products. For the latest technical information, IES files and product updates please refer to the website at [www.klite.in](http://www.klite.in)

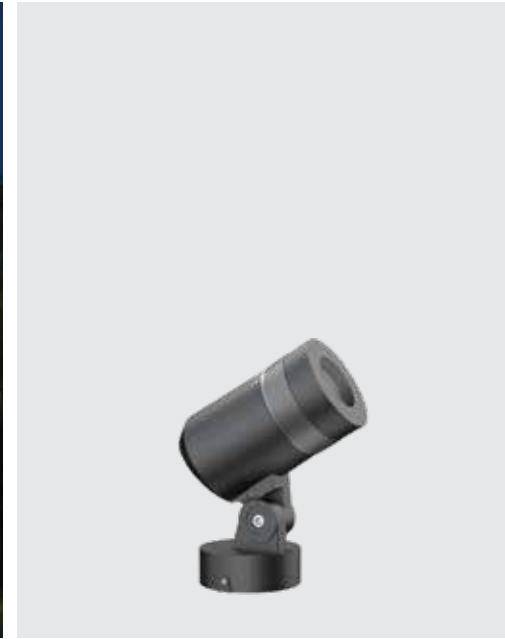

**Technical Specifications**

**General**

ID : 2591  
 System Wattage : 15W LED  
 Operating Temperature : -15°C~+50°C

**Physical**

Body : Die cast aluminium  
 Diffuser : Clear Tempered Glass  
 Mounting : Surface  
 Finish : Powder Coated  
           : Anthracite Grey

**Light Source**

Light Source : CREE COB  
 CRI (Ra) : >80 (90 CRI - On Request)  
 LED Colour Temperature : 3000K  
                                   : (Other CCT's on request)

**Driver**

Power Supply : Integral  
 Input Voltage : 230-240Vac  
 Frequency : 50-60Hz  
 Surge Protection : 3KV  
 Efficiency : >85%  
 Dimmable Option : DALI

**Optical Performance**

Beam Angle : 15° - 60° (Zoomable)

