K-LiTE

LED compact spot light luminaires designed to provide directional light. The luminaires comes with a connecting cable and bracket for permanent installation on a wall, under a ceiling or on floor.

Product Description

- Luminaire made of pressure die cast aluminium of high corrosion resistance and non corrosive stainless steel fasteners.
- Clear tempered glass.
- Mounting die-cast aluminium bracket arrangement to facilitate easy installation at any desired location.
- Rotary ring to adjust focusing from 15°- 60° beam angles (Zoomable).
- Cable entries for through-wiring of mains supply cable.
- CRI (Ra) : >80 (90 CRI - On Request).
- Prewired with LED driver and suitable for operating on 240V, 50Hz single phase ac supply.
- Available CCT : 3000K (Other CCT's on request)

| 𝕏 | CE | ⏚ | IP66 | IK05 |

Product Benefits

- Sturdy construction in order to maintain performance of the luminaire and to reduce maintenance costs.
- Quick & simple installation.
- Clear glass in the front with continuous rubber gasket to ensure adequate sealing against ingress of moisture, dust, insects etc.,
- Sustainable LED technology offers durability and optimal light output with low power consumption.

Area of Application

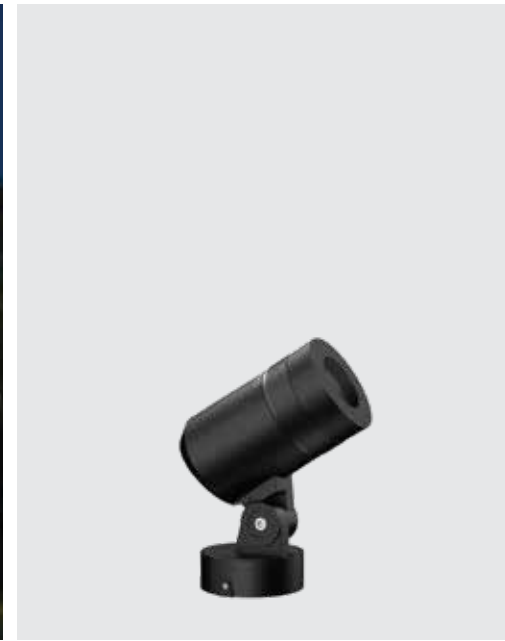Pathways, Parks, Sculptures, Gardens, Structures and Landscape lighting.

Available Finish

Powder Coated RAL 9005 Jet black.
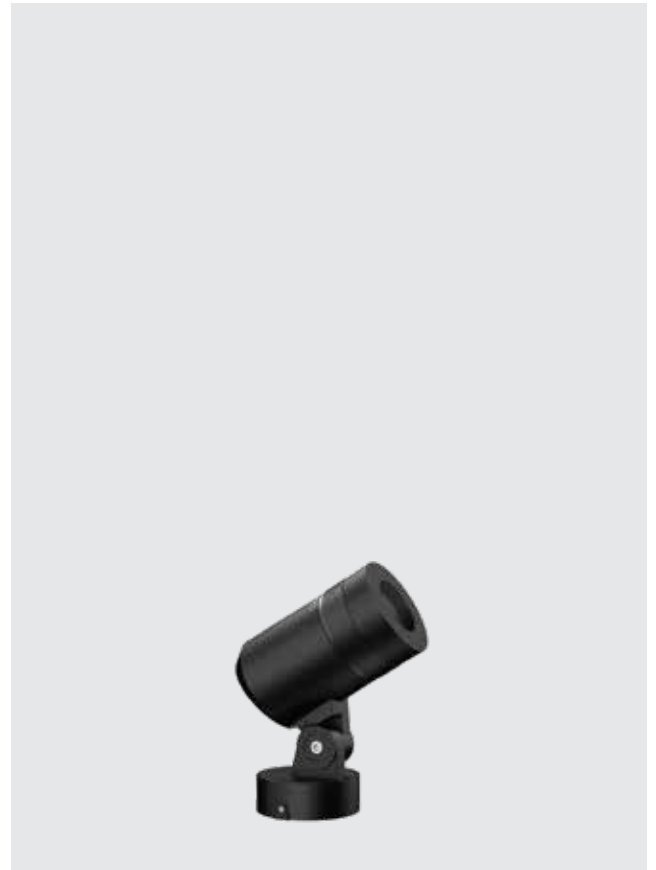
OPEN SOURCE

Technical Specifications

General

ID	: 2591
System Wattage	: 15W LED
Operating Temperature	: -15°C~+50°C

Physical

Body	: Die cast aluminium
Diffuser	: Clear Tempered Glass
Mounting	: Surface
Finish	: Powder Coated
	RAL 9005 Jet black

Light Source

Light Source	: CREE COB
CRI (Ra)	: >80 (90 CRI - On Request)
LED Colour Temperature	: 3000K (Other CCT's on request)

Driver

Power Supply	: Integral
Input Voltage	: 230-240Vac
Frequency	: 50-60Hz
Surge Protection	: 3KV
Efficiency	: >85%
Dimmable Option	: DALI

Optical Performance

Beam Angle	: 15° - 60° (Zoomable)

CE | IP66 | IK05

142   Ø80
189

Base plate Ø60 x 3thk
Elongated 12 x 6
to suit coach screws
at CC 33.5
Cable entry hole Ø18
Elongated 15 x 6
to suit coach screws
at CC 33.5
2 Nos. of SQ. head
coach screw
2 Nos. of rawl plug

Note : It is our constant endeavor to upgrade the performance of our products. For the latest technical information, IES files and product updates please refer to the website at **www.klite.in**