

Area Lighting Pole is a simplest design which suits the clean aesthetics with appeal simplicity and elegance. Our poles can be designed to suit single or multi arms brackets in order to install one or more light sources.

Product Description

- Pole design parameters vary depending on the type of bracket and loading factor.
- All pole sections are welded using special v groove technique by certified welders using high end MIG welding processes.
- Built-in control box with service door and vandal resistant loss proof screw.
- Die cast aluminium door is contoured to the shape of the pole with rubber gasket.
- The control gear tray is prewired with MCB, terminal connectors for loop-in / loop-out arrangement.
- The foundation bolt holes in the base plate are designed to be elongated for fine adjustments / alignment of the pole during installation.
- Base plate made of steel grade E250 & foundation bolt of grade 4.6
-  - Conformity mark

Product Benefits

- Quick installation and low assembly costs.
- A wide range of pole heights and bracket options to meet various lighting requirements.
- Functionally versatile, strong and stable.
- Long life span.
- Innovative design options to provide visual integration with the environment.
- Customised for your delight : Creating the entire product portfolio - Right from concept to completion, merging the best technology and practices in lighting.

Area of Application

Lighting of Buildings, Monuments, Statues, Campus Lighting, Resorts, Shipment Yards, Airports, General area lighting & Sports lightings.

Installation

Surface mounted with base plate and fitted on a pre formed foundation.

Available Finish


Coated with zinc rich primer and finished using environmentally stable polyurethane based paint / Pure polyester powder coated of desired colour.

- RAL 9004 Black
- RAL 9007 Grey aluminium
- RAL 7016 Anthracite grey
- Graphite grey


Code	Pole Size	Base Size	Height	Mounting
12064-500-SA	Ø88.9	-	5000	F90
12064-500-DA	Ø88.9	-	5000	F90
12064-600-SA	Ø88.9	Ø139.7	6000	F51.2
12064-600-DA	Ø88.9	Ø139.7	6000	F51.2
12064-700-SA	Ø88.9	Ø139.7	7000	F51.3
12064-700-DA	Ø88.9	Ø139.7	7000	F51.3
12064-700-TT	Ø88.9	Ø139.7	7000	F51.3



12064-500-SA

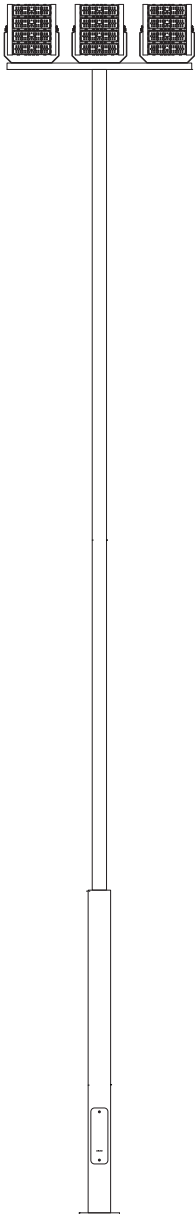

12064-700-TT

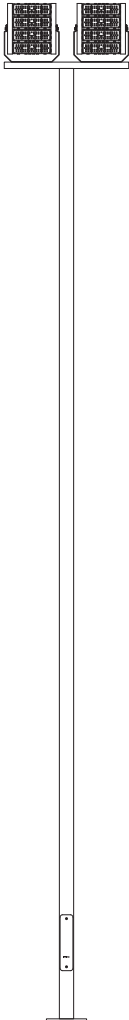

12064-600-DA