

Decorative wall bracket are a perfect fit for varied outdoor lighting applications. Designed to illuminate the wall and surface in front of wall and for light accents on vertical surfaces.

Product Description

- Bracket is designed for pathway lighting, suitable for post top / pendant type luminaires.
- Bracket section welded with mounting base by certified welders, using high end MIG welding processes.
- Surface mounting on wall using hardware after connecting to the power supply.
- Post top luminaire suitable for mounting on 38 / 50 / 60mm OD pipe.
- Pendant luminaire suitable for mounting to internally threaded pipe of designation : M30
- Cable entries for through-wiring of mains supply cable.
-  Conformity mark

Product Benefits

- Excellent corrosion resistant.
- Quick installation and low assembly costs.
- Innovative Design options to provide Visual integration with the environment.
- Long life span with very low maintenance.

Area of Application

Commercial complex, Pathways in residential buildings & office complex.

Available Finish

Coated with zinc rich primer and finished using environmentally stable polyurethane based paint / Pure polyester powder coated of desired colour.

- RAL 9004 Black
- RAL 9007 Grey aluminium
- RAL 7016 Anthracite grey
- Graphite grey

Note : The ID is only for wall bracket, luminaire to be ordered separately.



1975-WB-TM
ELISA / ELISA INVERTED
11975-WB-TM / 11975-WB-PM W80 373 x 280




DAIN
11980-WB W78 300 x 131




1978-WB-PM STARK INVERTED
STARK / STARK INVERTED
11978-WB-TM / 11978-WB-PM W78 370 x 150




PELICAN MINI
11981-WB W79 643 x 1050

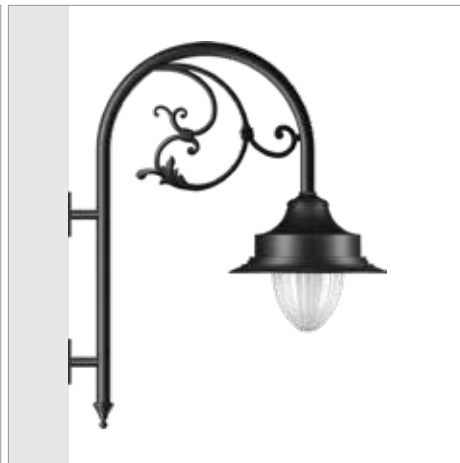

PERSIL MINI
11982-WB W79 643 x 1050

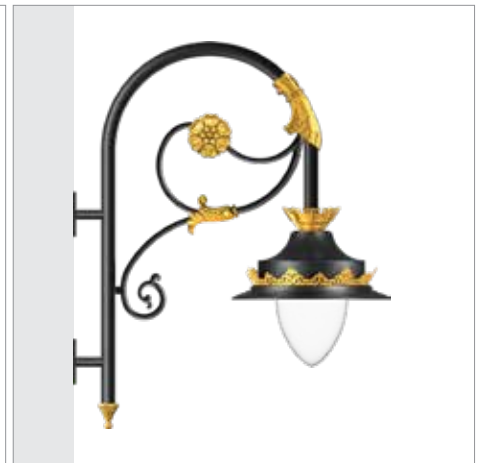

PELICAN MINI ORNA
11983-WB W79 643 x 1050

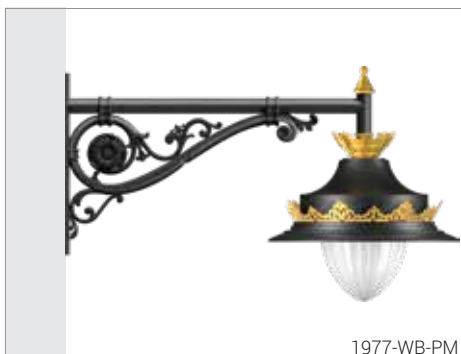

1977-WB-PM
SWAN / SWAN INVERTED
11977-WB-TM / 11977-WB-PM W76 750 x 450