

Architectural Lighting Pole is design to create a distinctive atmosphere in town & cities by using the most advanced technology to develop innovative lighting solutions. Poles can stylishly convey the identity of any landscape.

Product Description

- Pole design parameters vary depending on the type of bracket and loading factor.
- All pole sections are welded using special v groove technique by certified welders using high end MIG welding processes.
- Built-in control box with service door and vandal resistant loss proof screw.
- Die cast aluminium door is contoured to the shape of the pole with rubber gasket.
- The control gear tray is prewired with MCB, terminal connectors for loop-in / loop-out arrangement.
- The foundation bolt holes in the base plate are designed to be elongated for fine adjustments / alignment of the pole during installation.
- Base plate made of steel grade E250 & foundation bolt of grade 4.6
-  - Conformity mark

Product Benefits

- Quick installation and low assembly costs.
- A wide range of pole heights and bracket options to meet various lighting requirements.
- Functionally versatile, strong and stable.
- Long life span.
- Innovative Design options to provide visual integration with the environment.
- Customised for your delight : Creating the entire product portfolio - Right from concept to completion, merging the best technology and practices in lighting.

Area of Application

Street lighting in main road / secondary roads, Illuminating pathways in parks, Gardens, Resorts, Expressways, Private driveways, Residential Area Lighting, Boulevards, Building perimeters and Public places.


Installation

Surface mounted with base plate and fitted on a pre formed foundation.

Available Finish

Coated with zinc rich primer and finished using environmentally stable polyurethane based paint / Pure polyester powder coated of desired colour.

- RAL 9004 Black
- RAL 9007 Grey aluminium
- RAL 7016 Anthracite grey
- Graphite grey

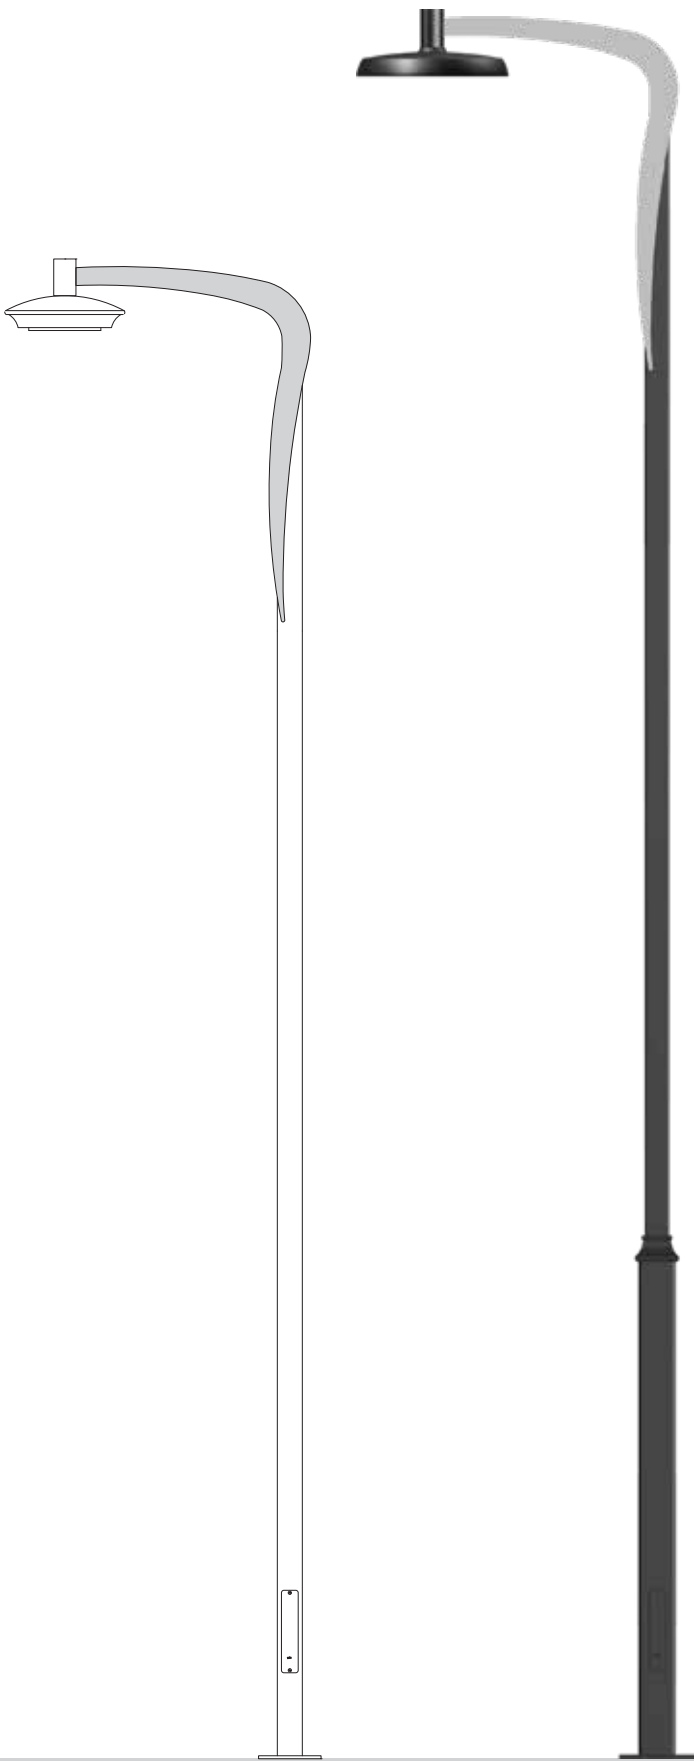

HADVIK

Series

Code	Pole Size	Base Size	Height	Mounting
12041-600-S48-SA	□100	-	6000	F57.4
12042-700-S48-SA	□100	□150	7000	F57.7
12042-700-S48-SA	□100	□150	8000	F57.7
12042-900-S48-SA	□100	□150	9000	F57.7