

K-LITE



Elements

DESIGN SERIES



TORCH





TORCH

Designed to Impress


Torch is a nature-inspired outdoor luminaire that introduces a refined aesthetic accent to architectural and landscape environments. True to its name, the design features a slender, elongated stem complemented by a gracefully suspended cylindrical luminaire head, evoking the organic form of a torch.




TORCH

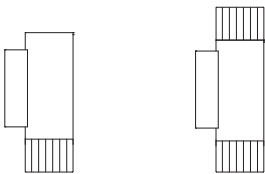

WALL TORCH

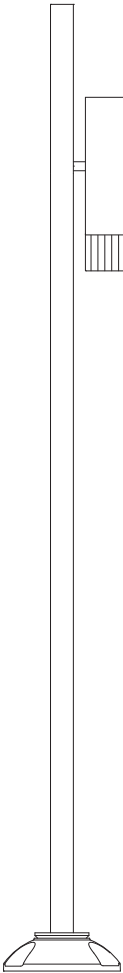

TORCH STIX

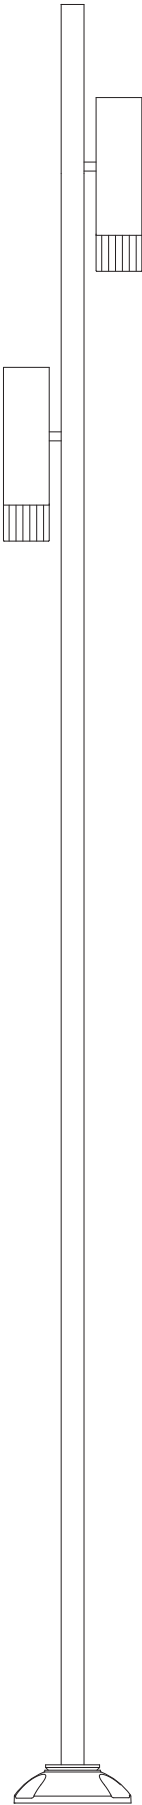

The environmentally friendly LED garden and pathway luminaires is both sustainability and user comfort. Its emphasis on creating a pleasant light distribution and high visual comfort, they cater to the needs of outdoor spaces while minimizing glare and discomfort for those in the vicinity.

MATERIAL

Body	: Extruded aluminium tube (grade 6063)
Diffuser	: Clear toughened glass
Impact Protection	: IK06
Ingress Protection	: IP65
Gasket	: Silicone
Mounting	: Pressure die cast aluminium mounting base

ELECTRICAL

Driver	: Standard
Power Supply	: Integral
Input Voltage	: 230-240Vac / 50-60 Hz

PRODUCT CONFIGURATIONS

Wattage	: 1 x 6W / 2 x 6W LED
Optical Beam Angle	: 12° / 24° / 40°
CCT	: 2700K / 3000K / 4000K / 6500K
LED Life Time	: L70 B10 60,000 H


AREA OF APPLICATION

Suitable for low traffic areas.

AVAILABLE FINISH

Pure polyester powder coated
RAL 9004 Black
RAL 9007 Grey aluminium
RAL 7016 Anthracite grey
Graphite grey



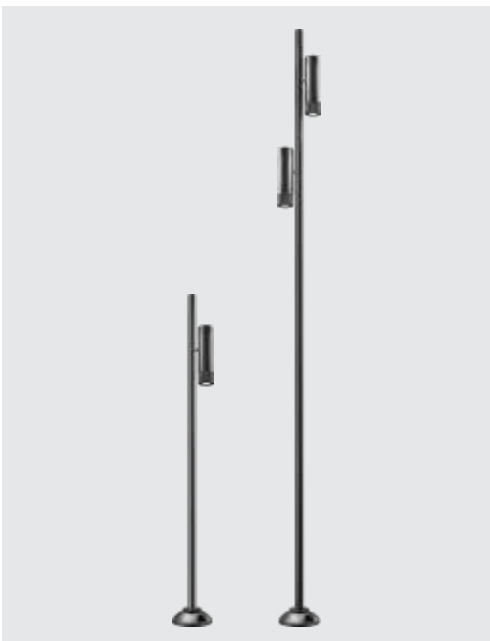

Technical Specifications

General

ID	: 22797
System Wattage	: 1 x 6W / 2 x 6W LED
Driver Integral	: Constant Current
Operating Voltage	: 150-270Vac
Operating Temperature	: -15°C~+50°C

Light Source

Light Source	: CITIZEN
CRI (Ra)	: >90
LED Colour Temperature	: 2700K / 3000K / 4000K 6500K

Physical



Body	: Extruded Aluminium Tube
Diffuser	: Clear Toughened Glass
Mounting	: Surface - Floor
Finish	: Powder coated RAL 9004 Black RAL 9007 Grey aluminium RAL 7016 Anthracite grey Graphite grey

Driver

Power Supply	: Integral
Input Voltage	: 230-240Vac
Frequency	: 50-60 Hz

Optical Performance

Optical Beam Angle	: 12° / 24° / 40°
--------------------	-------------------

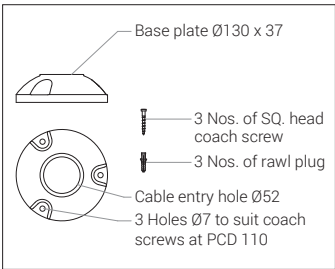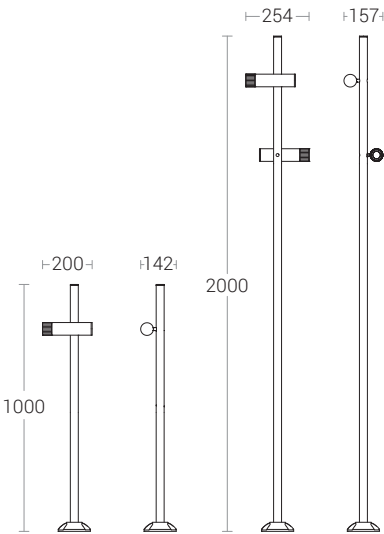



WALL TORCH

Precise Lighting Defined Lines

Wall-mounted luminaires designed for grazing light across a wide range of interior and exterior applications. Ideal for accentuating vertical facade elements, they provide ambient illumination with optional floor-washing effects. The refined design creates striking and dynamic light patterns across wall surfaces.

These facade luminaires feature hybrid optics, delivering versatile and precisely controlled lighting. They direct light downwards to provide ambient illumination and visual orientation, while simultaneously projecting light upwards to accentuate architectural elements. The carefully engineered design ensures light is delivered exactly where it is needed. With their sculpted wall-mounted form and fully shielded light source, the luminaires create dramatic, striking light effects while effectively minimizing glare and light pollution.

MATERIAL

Body	: Extruded & Die cast aluminium
Diffuser	: Clear toughened glass
Impact Protection	: IK06
Ingress Protection	: IP65
Gasket	: Silicone
Mounting	: Surface - Wall

ELECTRICAL

Driver	: Standard
Power Supply	: Integral
Input Voltage	: 230-240Vac / 50-60 Hz

PRODUCT CONFIGURATIONS

Wattage	: 1 x 6W / 2 x 6W LED
Optical Beam Angle	: 12° / 24° / 40°
CCT	: 2700K / 3000K / 4000K / 6500K
LED Life Time	: L70 B10 60,000 H

AREA OF APPLICATION

Residential, Commercial centres, Passages, Pathways, Sculptures and Structures.

AVAILABLE FINISH

Pure polyester powder coated
RAL 9004 Black
RAL 9007 Grey aluminium
RAL 7016 Anthracite grey
Graphite grey





Technical Specifications

General

ID	: 23627
System Wattage	: 1 x 6W / 2 x 6W LED
Driver Integral	: Constant Current
Operating Voltage	: 150-270Vac
Operating Temperature	: -15°C~+50°C

Light Source

Light Source	: CITIZEN
CRI (Ra)	: >90
LED Colour Temperature	: 2700K / 3000K / 4000K 6500K

Physical



Body	: Extruded & Die cast Aluminium
Diffuser	: Clear Toughened Glass
Mounting	: Surface - Wall
Finish	: Powder coated RAL 9004 Black RAL 9007 Grey aluminium RAL 7016 Anthracite grey Graphite grey

Driver

Power Supply	: Integral
Input Voltage	: 230-240Vac
Frequency	: 50-60 Hz

Optical Performance

Optical Beam Angle	: 12° / 24° / 40°
--------------------	-------------------

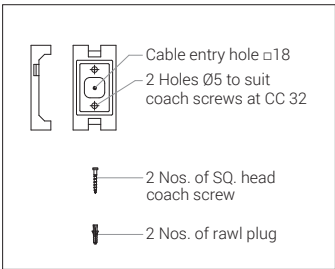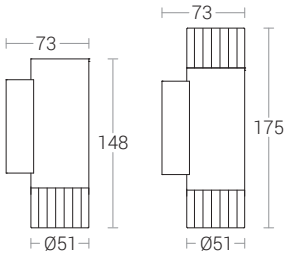

Compact and efficient decorative pendant / ceiling mounted down lighters. High protection class & lumen output makes it versatile solution for both indoor & outdoor applications.

MATERIAL

Body	: Extruded aluminium tube (grade 6063)
Diffuser	: Clear toughened glass
Impact Protection	: IK06
Ingress Protection	: IP65
Gasket	: Silicone
Mounting	: Surface / Pendant

ELECTRICAL

Driver	: Standard
Power Supply	: Integral
Input Voltage	: 230-240Vac / 50-60 Hz

PRODUCT CONFIGURATIONS

Wattage	: 6W LED
Optical Beam Angle	: 12° / 24° / 40°
CCT	: 2700K / 3000K / 4000K / 6500K
LED Life Time	: L70 B10 60,000 H

AREA OF APPLICATION

Corporate Offices, Malls, Restaurants, Receptions, Corridors, Commercial & Business Centers, etc.

AVAILABLE FINISH

Pure polyester powder coated
RAL 9004 Black
RAL 9007 Grey aluminium
RAL 7016 Anthracite grey
Graphite grey





Technical Specifications

General

ID	: 24035
System Wattage	: 6W LED
Driver Integral	: Constant Current
Operating Voltage	: 150-270Vac
Operating Temperature	: -15°C~+50°C

Physical

Body	: Extruded Aluminium
Diffuser	: Clear Toughened Glass
Mounting	: Surface / Pendant
Finish	: Powder coated RAL 9004 Black RAL 9007 Grey aluminium RAL 7016 Anthracite grey Graphite grey

Light Source


Light Source	: CITIZEN
CRI (Ra)	: >90
LED Colour Temperature	: 2700K / 3000K / 4000K 6500K

Driver

Power Supply	: Integral
Input Voltage	: 230-240Vac
Frequency	: 50-60 Hz

Optical Performance

Optical Beam Angle	: 12° / 24° / 40°
--------------------	-------------------

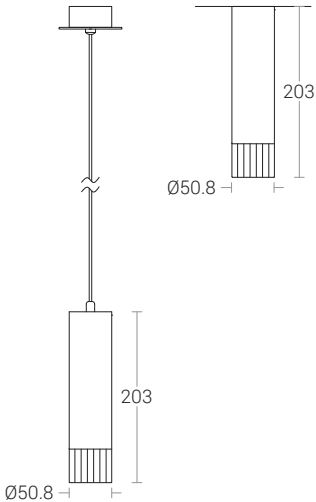



K-LITE

K-LITE INDUSTRIES PVT.LTD

D-10, Ambattur Industrial Estate, Chennai - 600 058.

T : 26257710, 48591800, 48581950.

M: 95000 79797, 95000 85511

E : info@klite.in

W : www.klite.in



Unit II

23B,
SIDCO Industrial Estate,
Chennai - 600 098.

Unit V

Illumination Lab
G8, Ambattur Industrial Estate,
Chennai - 600 058.

Delhi Office - NCR

L-14/10, DLF City,
Phase - II, Gurgaon - 122002.
Haryana.

Unit III

179 & 180,
SIDCO Industrial Estate,
Chennai - 600 098.

Unit VI

Plot No.E29-E30-E31-E32,
Industrial Area, Phase-II,
Mandideep Tehsil,
Goharganj District-462046.
Raisen (MP).

Showroom

7/11, M.T.H. Road,
Chennai - 600 058.

Unit IV

22B,
SIDCO Industrial Estate,
Chennai - 600 098.

K-LITE EUROPE LTD London Showroom

271 Abbeydale Road,
London, HA0 1TW.
T : 0208 012 8393
E : info@klite.co.uk
W : www.klite.co.uk