

These environmental friendly sleek energy efficient garden luminaires accentuate the garden architecture creating a pleasant and symmetrical light distribution. Bollard luminaires contribute to safety by illuminating pathways and other open spaces.

### Product Description

- Luminaire body made of extruded aluminium alloy (grade 6063) with die cast aluminium components and non corrosive SS fasteners.
- For optimum coordination with lighting situation, these luminaries can be supplied in three different heights.
- Non yellowing UV stabilized polycarbonate translucent diffuser.
- Light emission 360 degree.
- Silicone gasket
- Luminaire supplied with 2 core cable one metre length.
- Mounting plate Die cast aluminium double powder coat with an anchorage unit and stainless steel fixing screws.
- Cable entries for through-wiring of mains supply cable.
- Prewired with E27 holder and suitable for operation on 240V, 50Hz single phase ac supply.



### Product Benefits

- Elegant, Robust design
- Sturdy construction in order to maintain performance of the luminaire and to reduce maintenance costs.
- Quick & simple installation.



### Area of Application

Suitable for Residential & Public areas for Illuminating Driveways, Pathways, Flowerbeds, Entrances, Squares, Gardens and as well as landscape architecture.

### Available Finish

Pure polyester powder coated

- Graphite grey
- Anthracite grey
- Jet black

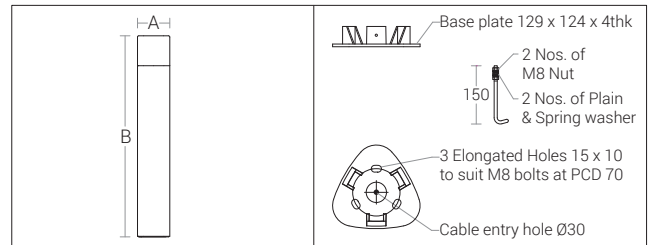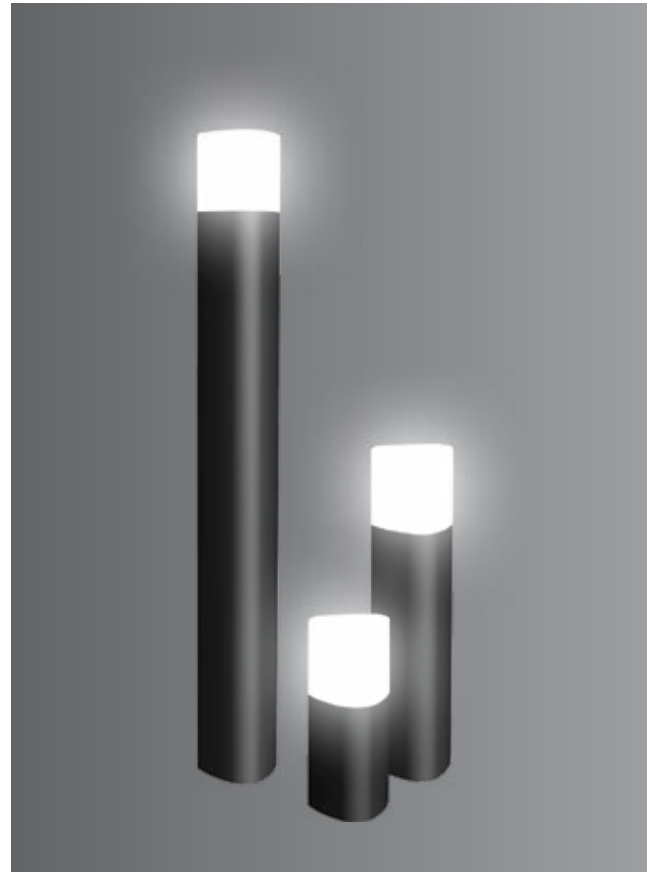

ID	Holder	A	B
6955	E27	△ 130	1000
6956	E27	△ 130	500
6957	E27	△ 130	300

Max. Wattage : 11W LED / 20W CFLE