

These environmental friendly sleek energy efficient garden luminaires accentuate the garden architecture creating a pleasant and symmetrical light distribution. Bollard luminaires contribute to safety by illuminating pathways and other open spaces.

**Product Description**

- Luminaire body made of extruded aluminium alloy (grade 6063) with die cast aluminium components and non corrosive SS fasteners.
- For optimum coordination with lighting situation, these luminaries can be supplied in three different heights.
- Non yellowing UV stabilized polycarbonate translucent diffuser.
- Light emission 360 degree.
- Silicone gasket
- Luminaire supplied with 2 core cable one metre length.
- Mounting plate Die cast aluminium double powder coat with an anchorage unit and stainless steel fixing screws.
- Cable entries for through-wiring of mains supply cable.
- Prewired with E27 holder and suitable for operation on 240V, 50Hz single phase ac supply.



**Product Benefits**

- Elegant, Robust design
- Dark sky compliant protects pedestrians from glare by preventing spill light above the horizontal plane.
- Sturdy construction in order to maintain performance of the luminaire and to reduce maintenance costs.
- Quick & simple installation.


**Area of Application**

Suitable for Residential & Public areas for Illuminating Driveways, Pathways, Flowerbeds, Entrances, Squares, Gardens and as well as landscape architecture.

**Available Finish**

Pure polyester powder coated

- Graphite grey
- Anthracite grey
- Jet black

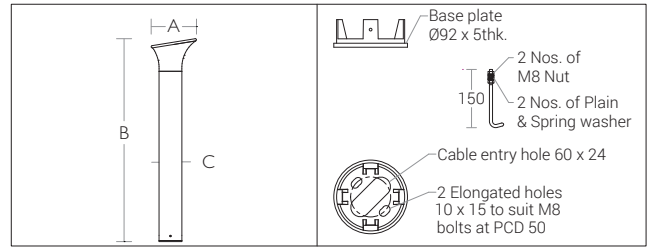

| ID   | Wattage | A   | B    | C   |
|------|---------|-----|------|-----|
| 6963 | E27     | 176 | 1000 | Ø90 |
| 6964 | E27     | 176 | 500  | Ø90 |
| 6965 | E27     | 176 | 300  | Ø90 |

Max. Wattage : 11W LED / 20W CFLE