




UNKAL LAKE, KARNATAKA

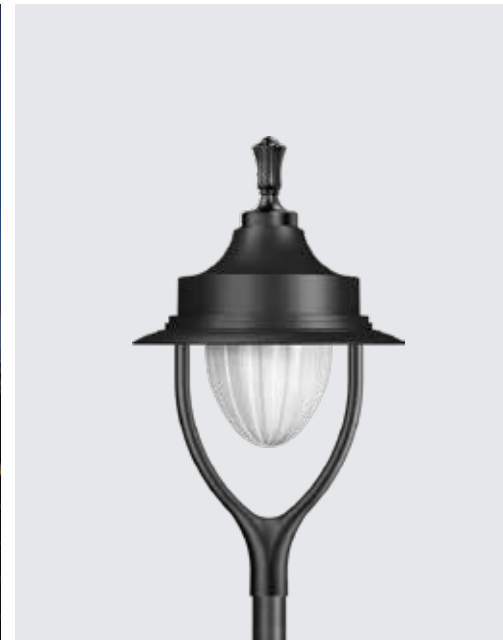

## Technical Specifications

### General

ID	: 25000
System Wattage	: 30W LED
Driver Integral	: Constant Current
Operating Voltage	: 100-277Vac
Operating Temperature	: -15°C~+50°C

### Physical

Body	: Spun aluminium top cover & Die cast aluminium base
Diffuser	: Translucent acrylic
Mounting	: Suitable for Ø50mm OD Pipe
Finish	: Powder coated RAL 9004 Black RAL 9007 Grey aluminium RAL 7016 Anthracite grey Graphite grey

### Light Source

Light Source	: LUMILEDS / BRIDGELUX
CRI (Ra)	: >70
LED Colour Temperature	: 2700K / 3000K / 4000K / 5700K

### Driver

Power Supply	: Integral
Input Voltage	: 230-240Vac
Frequency	: 50-60 Hz
Power Factor	: >0.90
THD	: <10%
Surge Protection	: 4KV
Efficiency	: >85%

### Optical Performance

Light Distribution	: Symmetrical
--------------------	---------------

