


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.45V I:0.0447A P:9.9256W PF:0.9641 Freq:50.00Hz Lamp Flux:1140x1 lm		
NAME: ROECTRA MINI - HALF FRAME	TYPE:WALL LUMINAIRES	WEIGHT:
SPEC.:CW, NICHIA	DIM.: 133 x 62 x 217	SERIAL No.:2124
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-4075	Imax (cd)	224.6	S/MH (C0/180)	1.24
NOMINAL POWER (W)	12	LOR (%)	54.6	S/MH (C90/270)	1.11
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	622.16	η UP, DN (C0-180)	0.0, 30.0
NOMINAL FLUX (lm)	1140	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 24.6
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	230	η down (%)	54.6	CIBSE SHR MAX	1.35

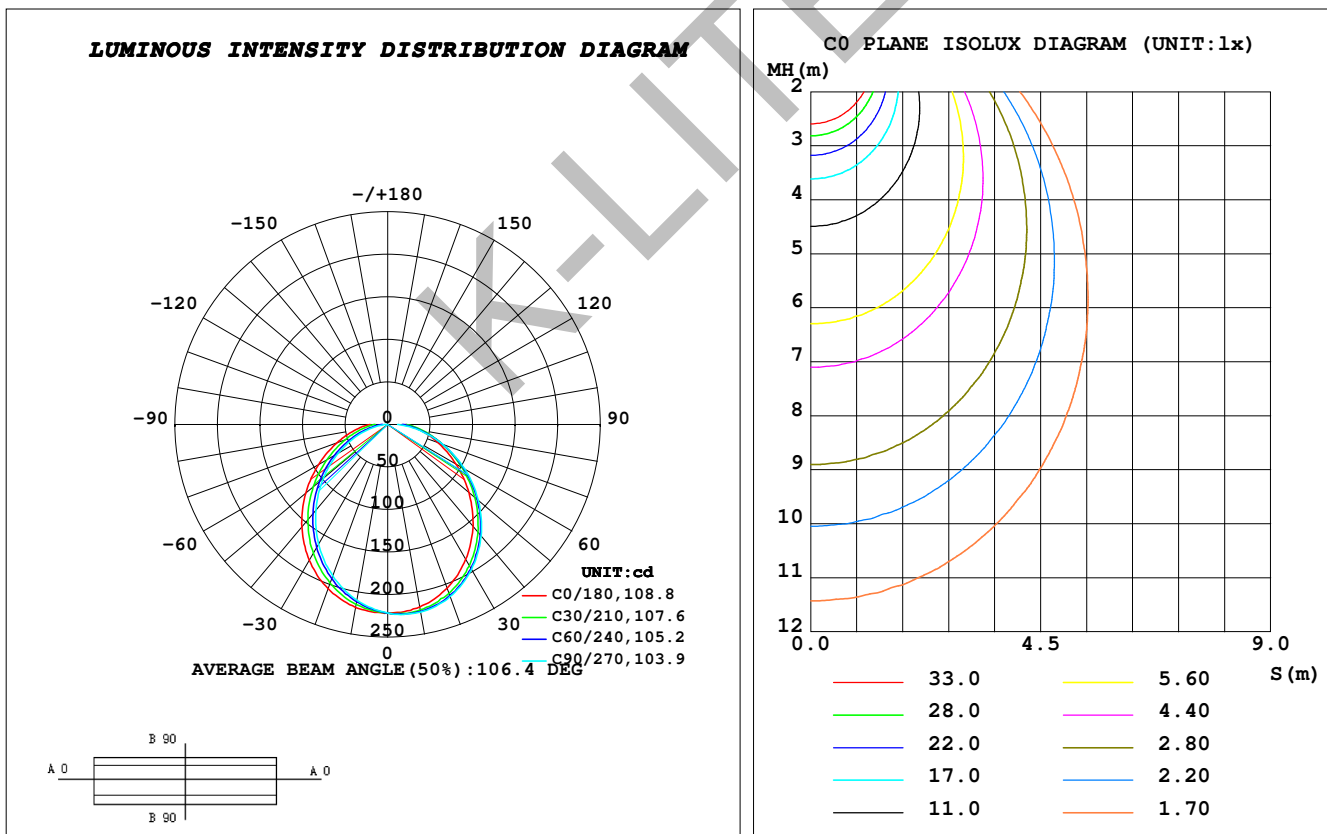

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: K-LITE
Test Date: 16 October 2020

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
Humidity: 65.0%
Test Distance: 1.825m [K=1.0000]
Remarks: