


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.55V I:0.0568A P:12.368W PF:0.9452 Freq:49.98Hz Lamp Flux:1146.6x1 lm		
NAME: PROXIMA	TYPE:CEILING LUMINAIRES	WEIGHT:
SPEC.:NW, CITIZEN	DIM.: Ø50 x 135 x 177	SERIAL No.:4460
MFR.: K-LITE	SUR.:	Shielding Angle:24°

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-3677	Imax (cd)	3037	S/MH (C0/180)	0.36
NOMINAL POWER (W)	12	LOR (%)	53.5	S/MH (C90/270)	0.40
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	613.50	η UP, DN (C0-180)	0.0, 25.5
NOMINAL FLUX (lm)	1146.6	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 28.0
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE (V)	230	η down (%)	53.5	CIBSE SHR MAX	1.00

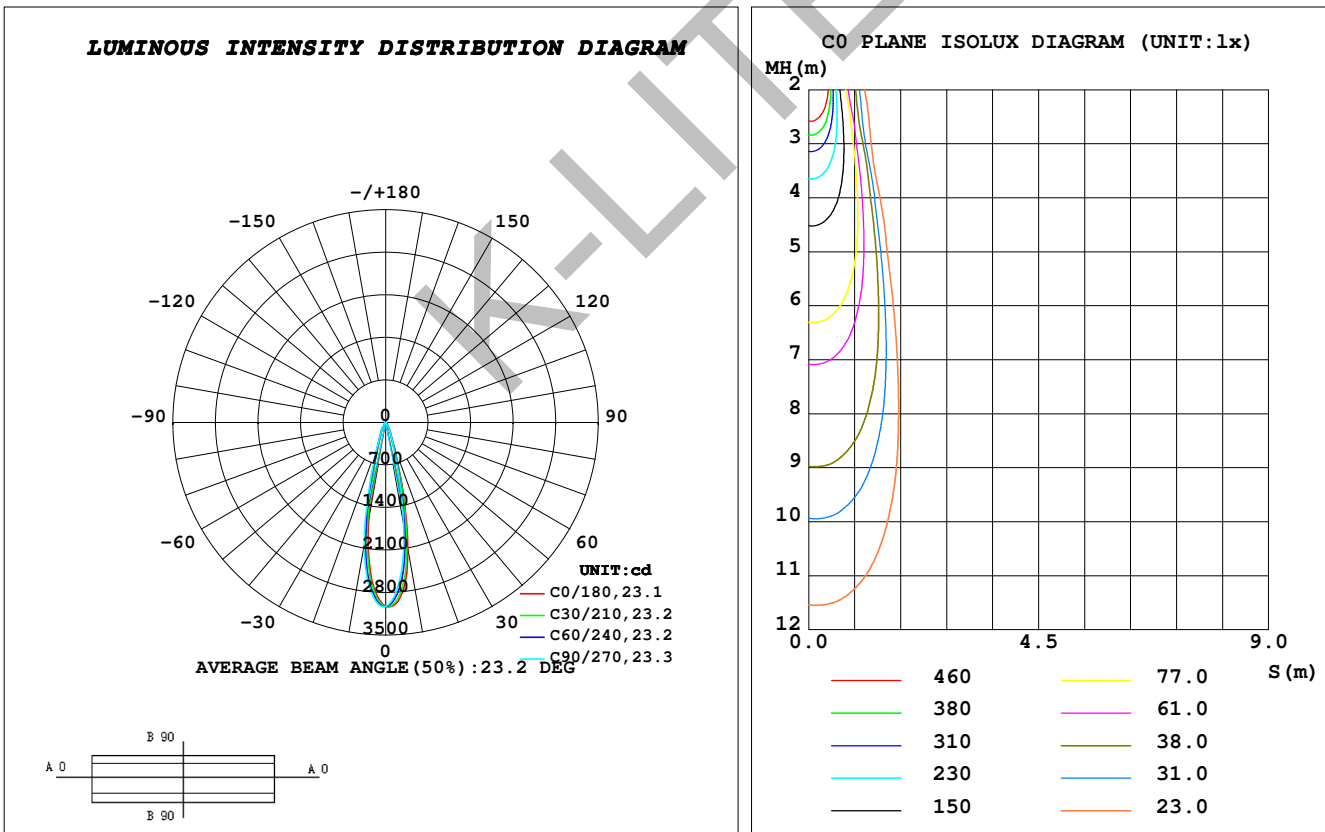

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: K-LITE
Test Date: 23 April 2022

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
Humidity: 65.0%
Test Distance: 1.825m [K=1.0000]
Remarks: